
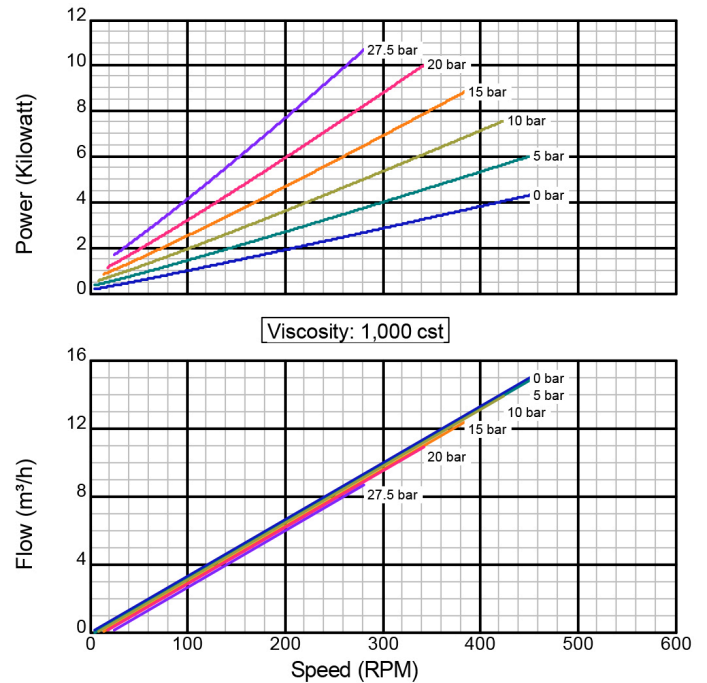


Model ID70A DI

Iron Construction

Standard Clearance

76.2 x 50.8 mm Std. Port Size

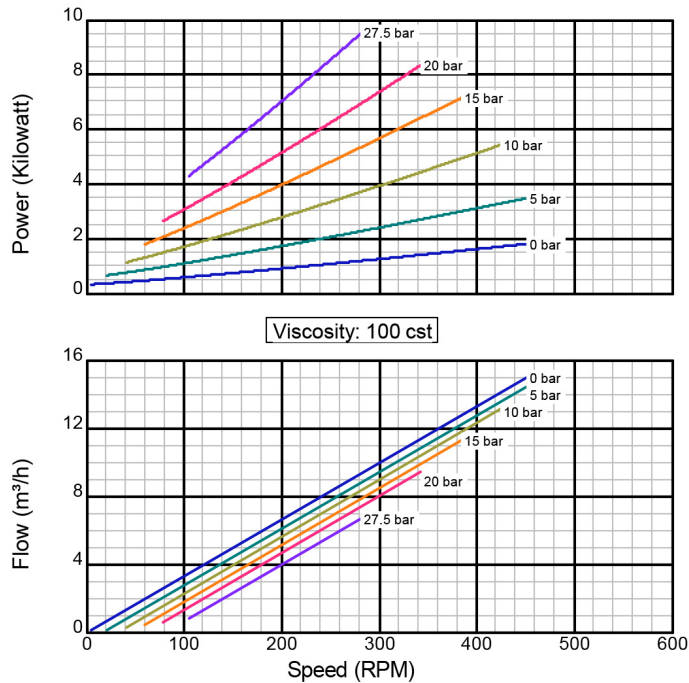

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.

Created on
November 30, 2000


Excellence at work. Excellence in life.

Model ID70A DI



Iron Construction

Standard Clearance



76.2 x 50.8 mm Std. Port Size

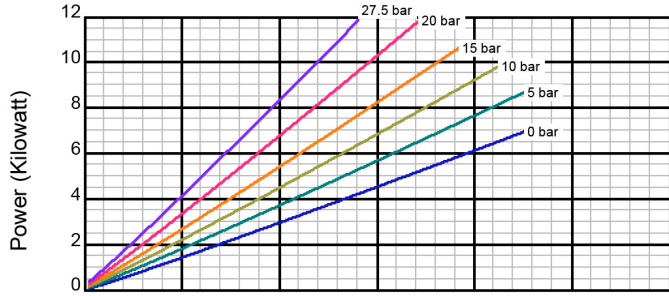


Viscosity: 10,000 cst

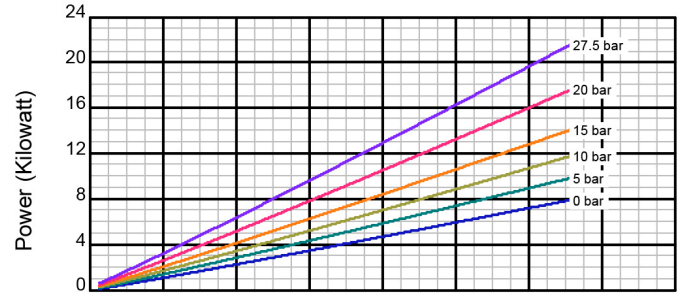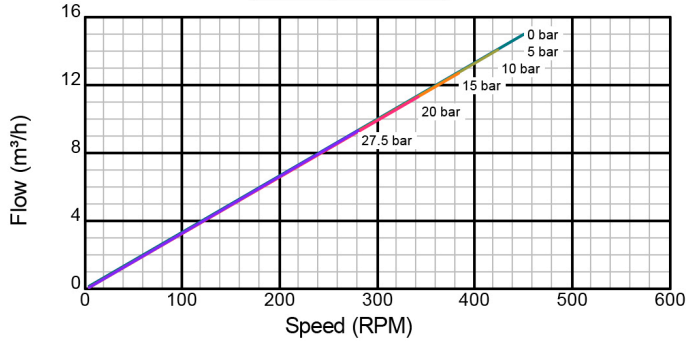

Viscosity: 100,000 cst

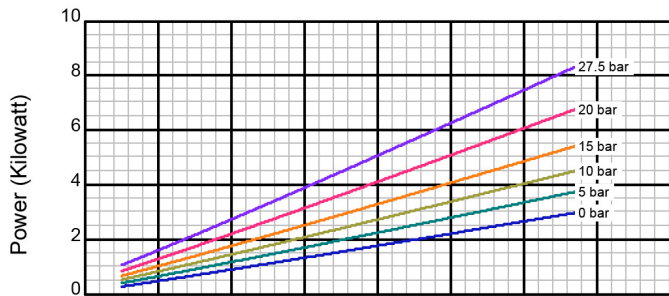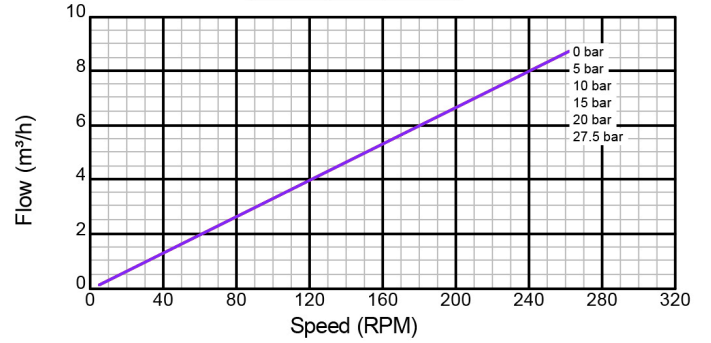

Viscosity: 1,000,000 cst

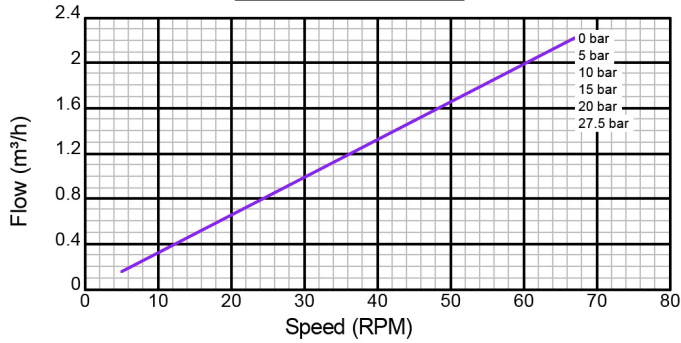

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.



Created on
November 30, 2000

Model ID70A DI

Iron Construction

Hot Clearance

76.2 x 50.8 mm Std. Port Size

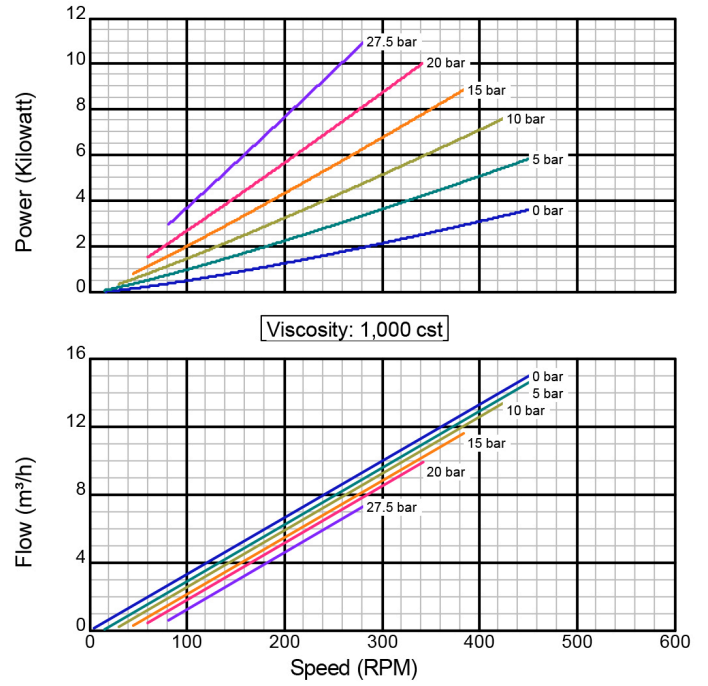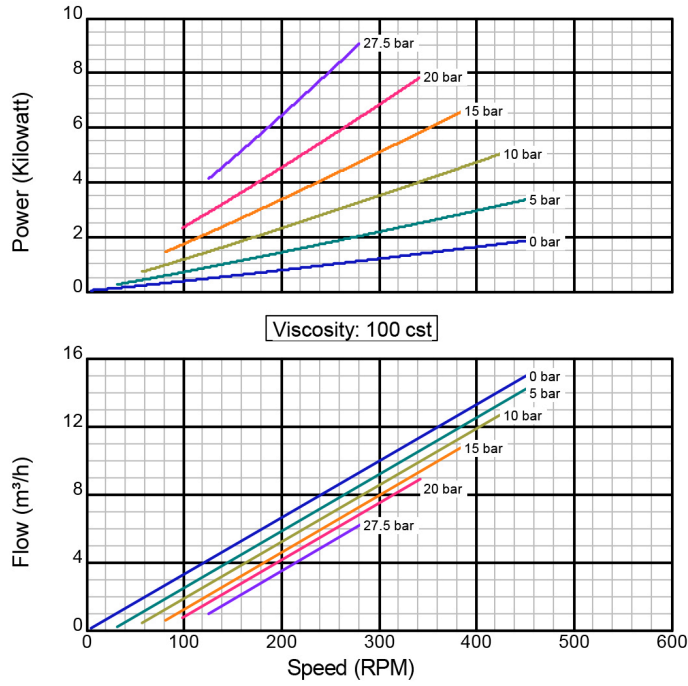

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.


Created on
November 30, 2000

Model ID70A DI



Iron Construction

Hot Clearance



76.2 x 50.8 mm Std. Port Size

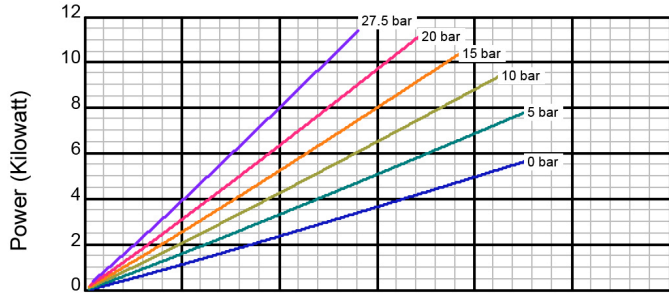


Viscosity: 10,000 cst

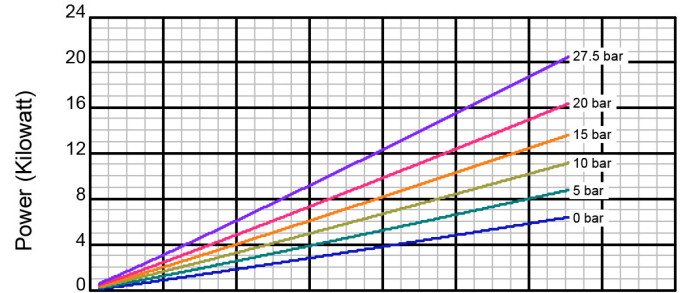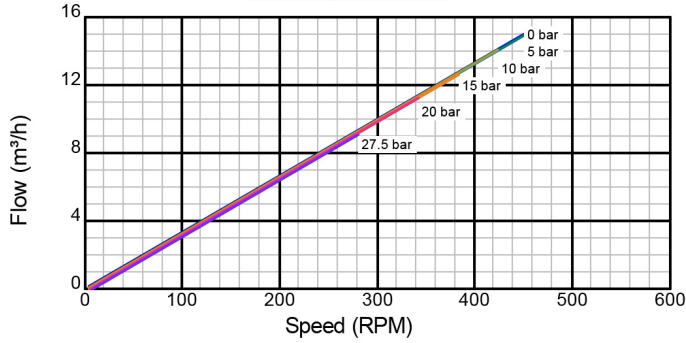

Viscosity: 100,000 cst

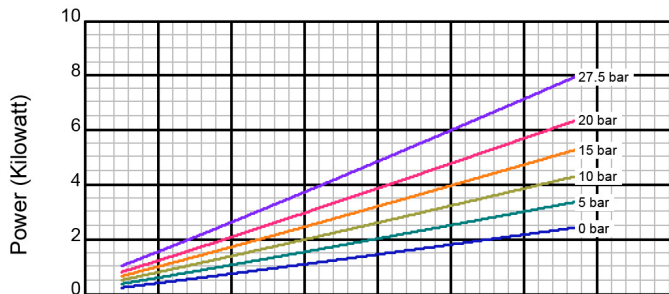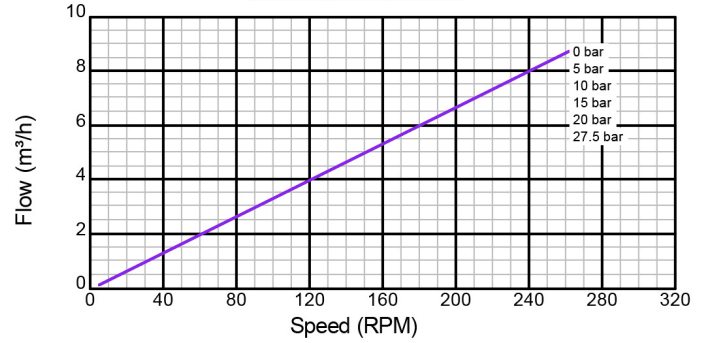

Viscosity: 1,000,000 cst

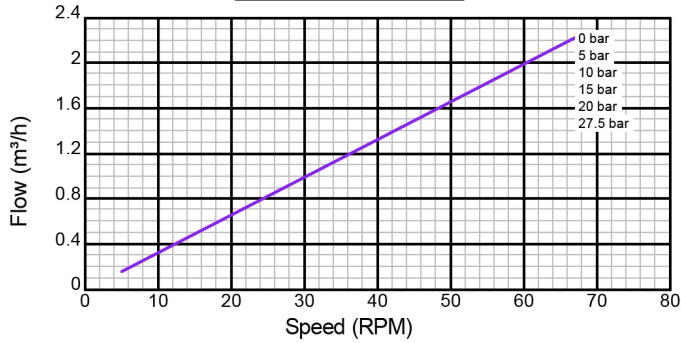

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.



Created on
November 30, 2000

Model ID70A SS

Stainless Steel Construction

Standard Clearance

76.2 x 50.8 mm Std. Port Size

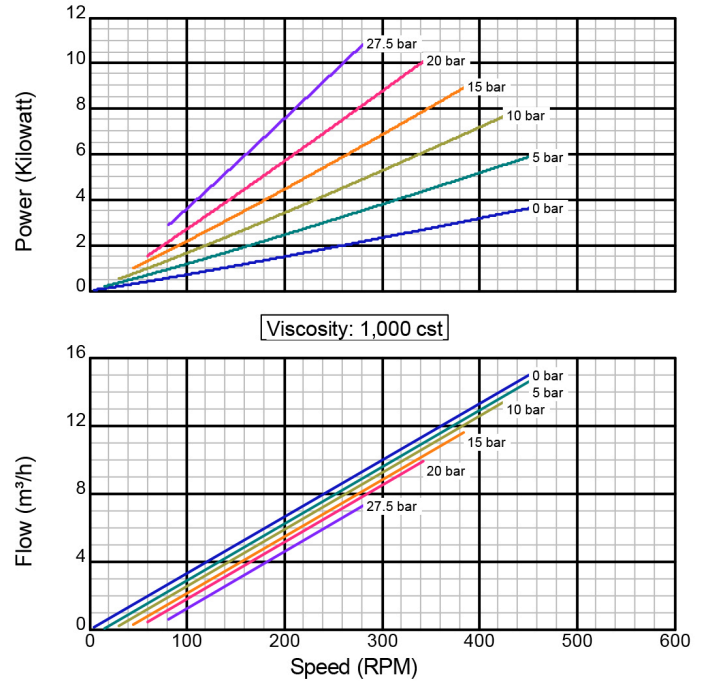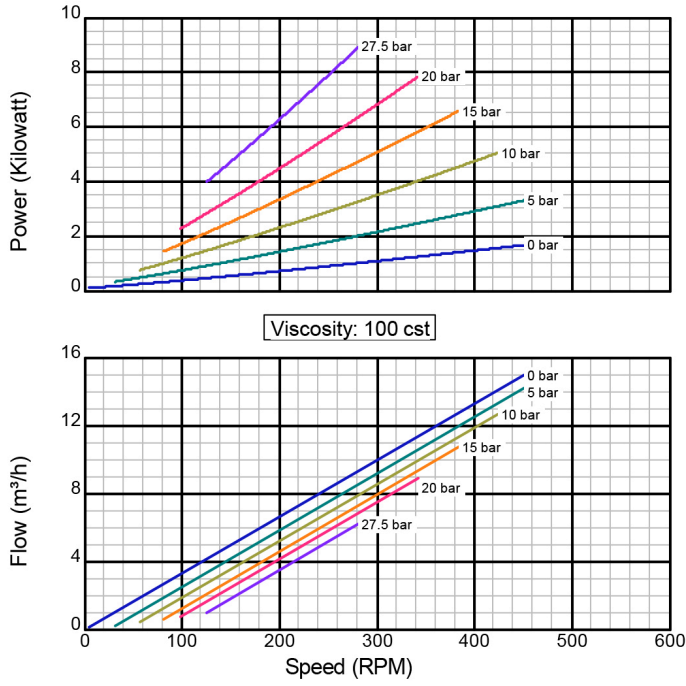

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.


Created on
November 30, 2000

Model ID70A SS



Stainless Steel Construction

Standard Clearance



76.2 x 50.8 mm Std. Port Size

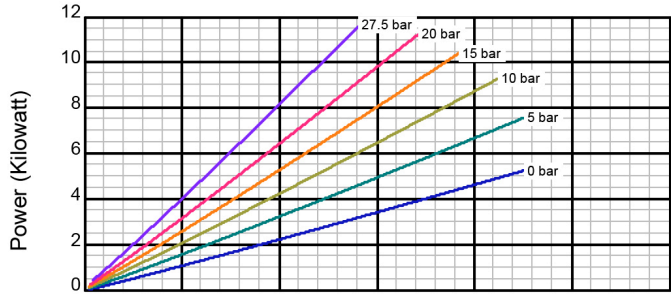


Viscosity: 10,000 cst

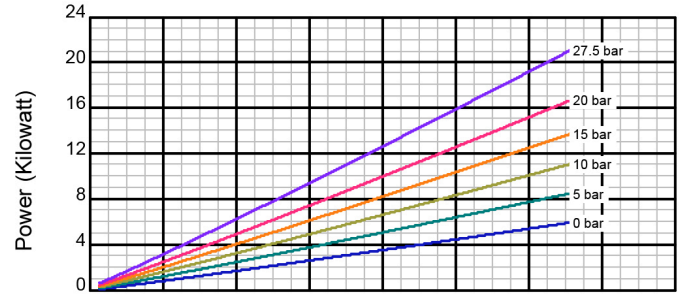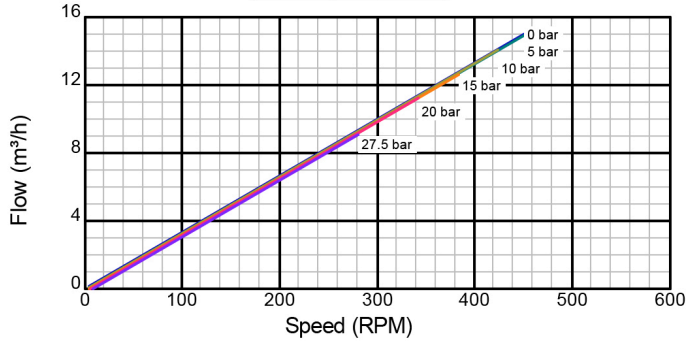

Viscosity: 100,000 cst

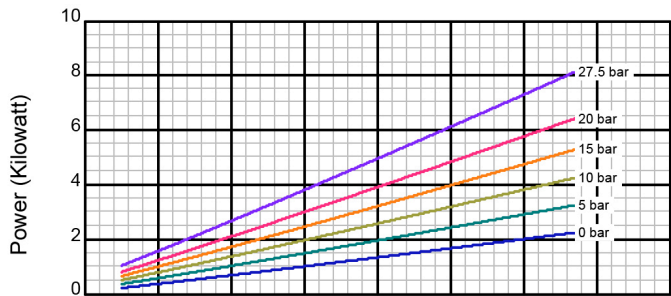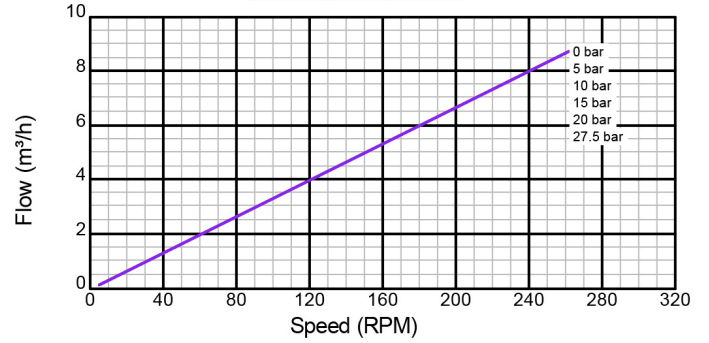

Viscosity: 1,000,000 cst

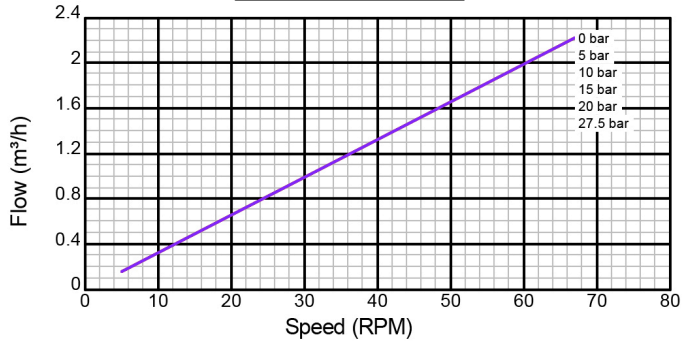

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.



Created on
November 30, 2000

Model ID70A SS

Stainless Steel Construction

Hot Clearance

76.2 x 50.8 mm Std. Port Size

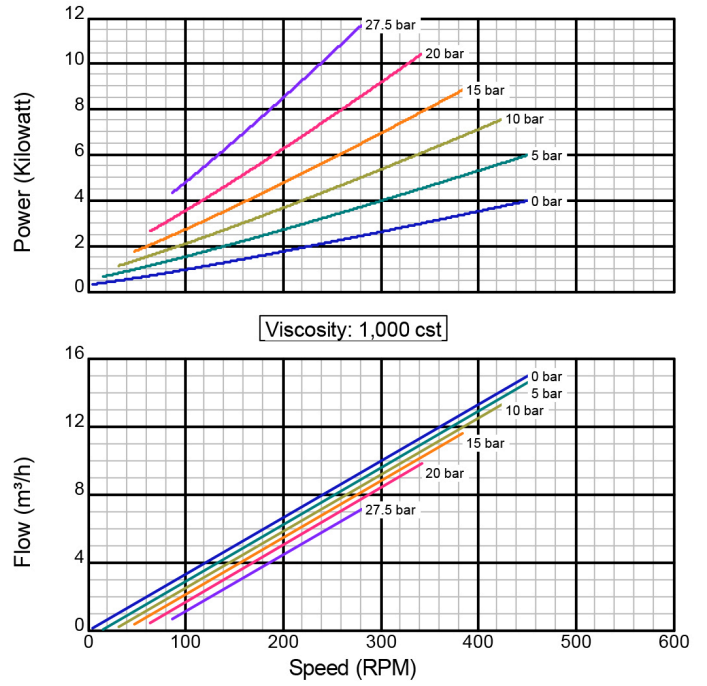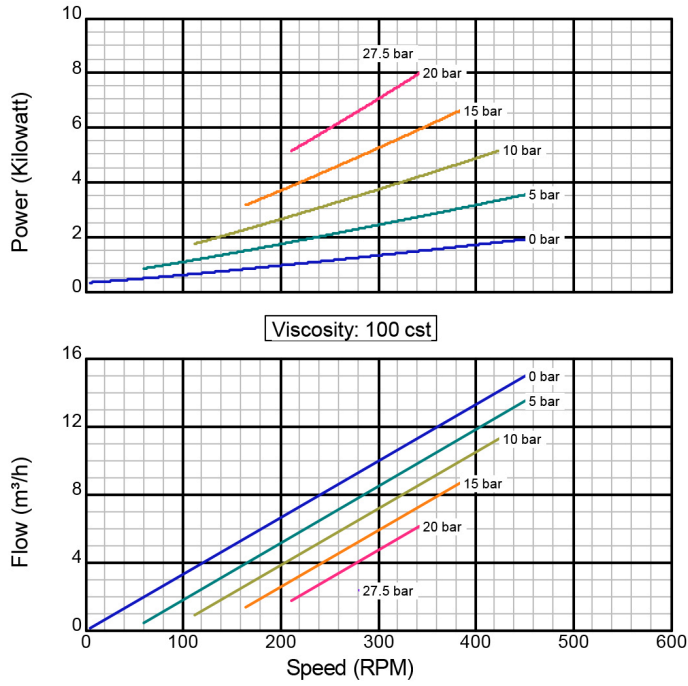

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.


Created on
November 30, 2000

Model ID70A SS



Stainless Steel Construction

Hot Clearance



76.2 x 50.8 mm Std. Port Size

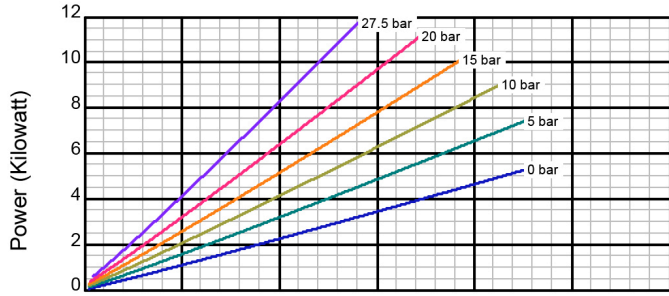


Viscosity: 10,000 cst

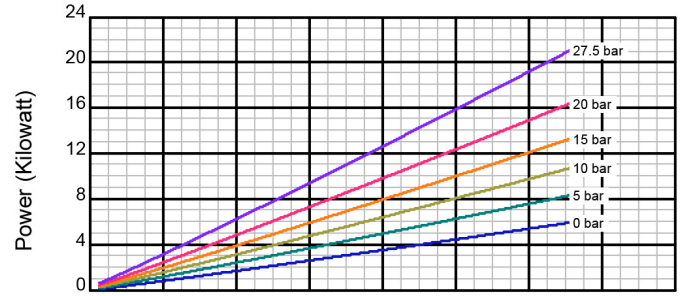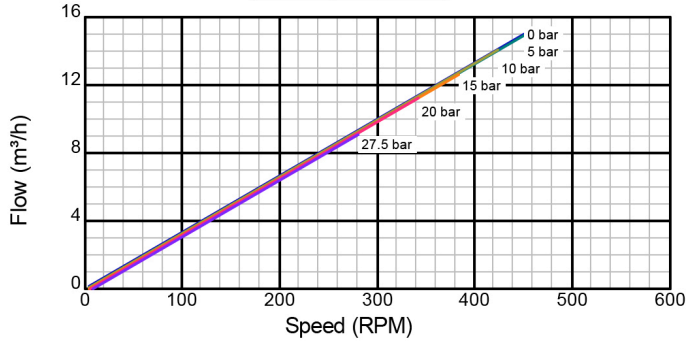

Viscosity: 100,000 cst

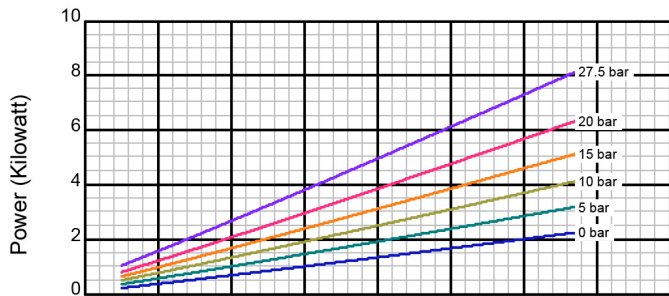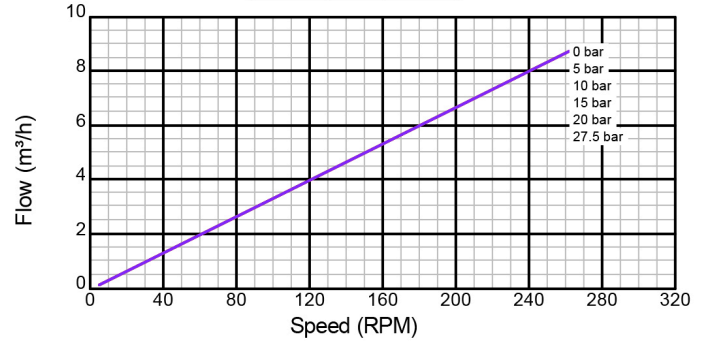

Viscosity: 1,000,000 cst

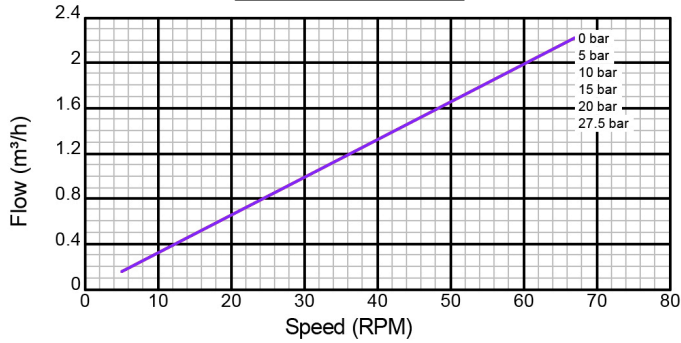

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.



Created on
November 30, 2000

Model ID70A SS

Stainless Steel Construction

Chocolate Clearance

76.2 x 50.8 mm Std. Port Size

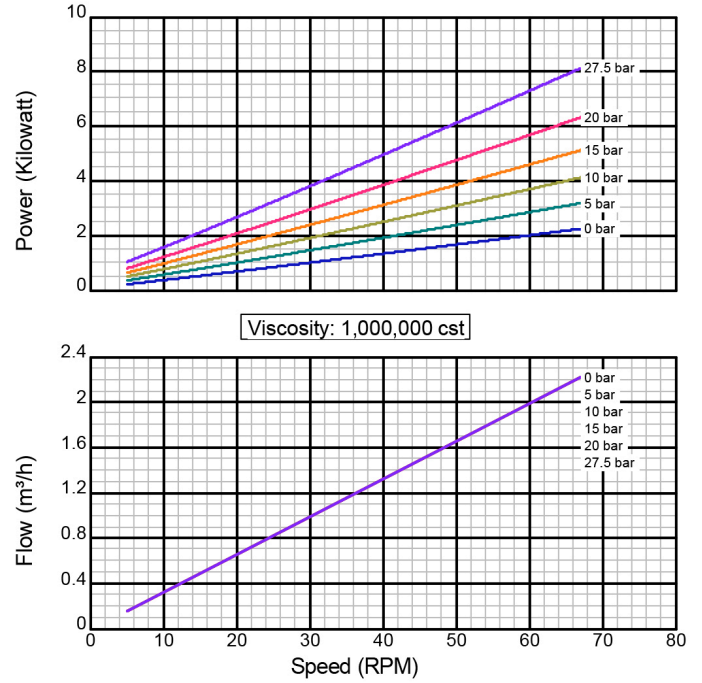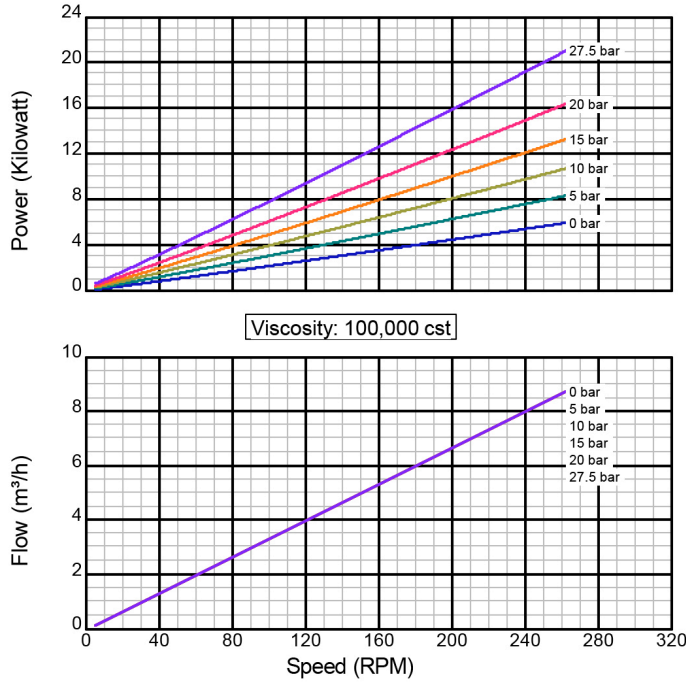

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.

Created on
November 30, 2000