


Iron Construction

Performance Curves (Metric) GlobalGear® 120

Model GG120I

Standard Clearance

2" Std. Port Size

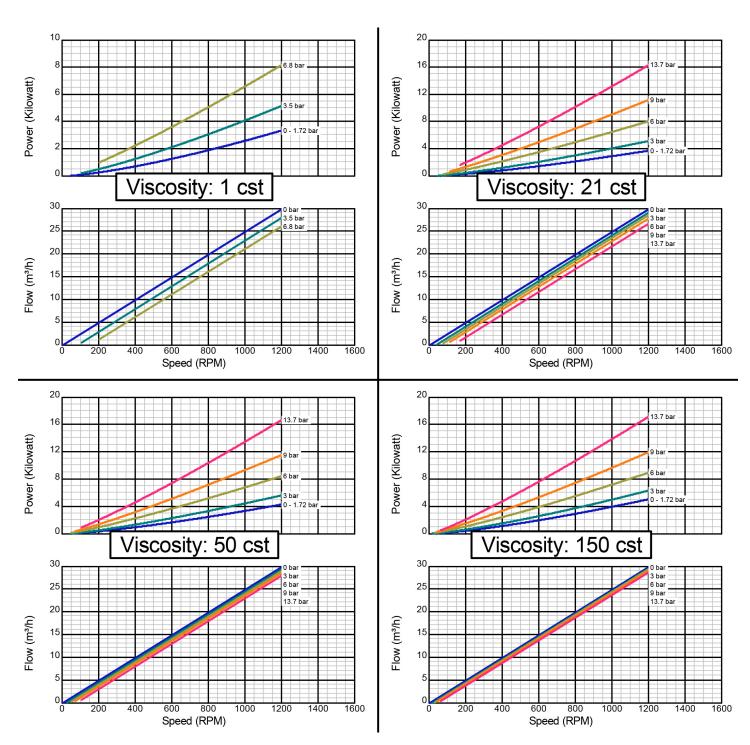


There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatabilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.

Model GG120I

Iron Construction

Standard Clearance

2" Std. Port Size

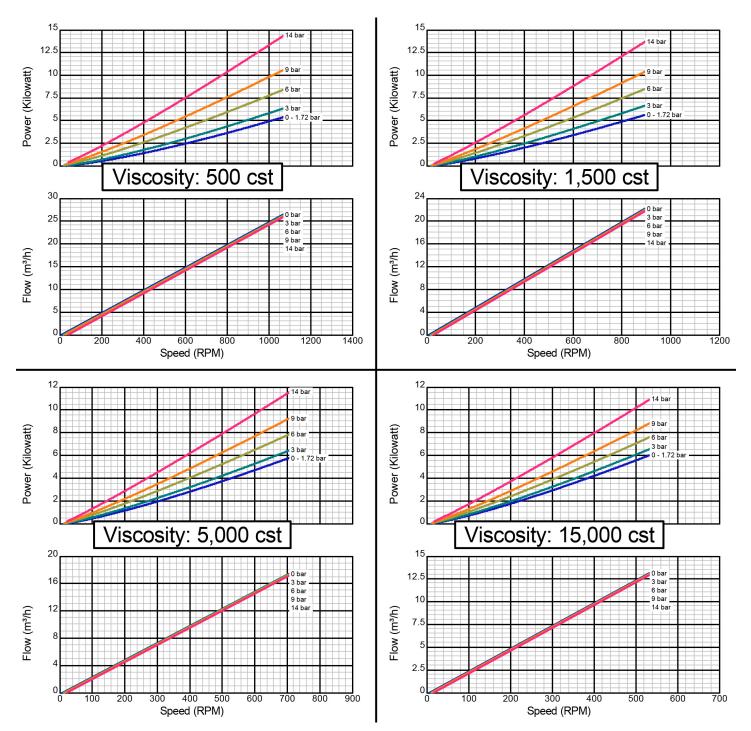


There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatabilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.

Model GG120I Standard Clearance

Iron Construction

2" Std. Port Size

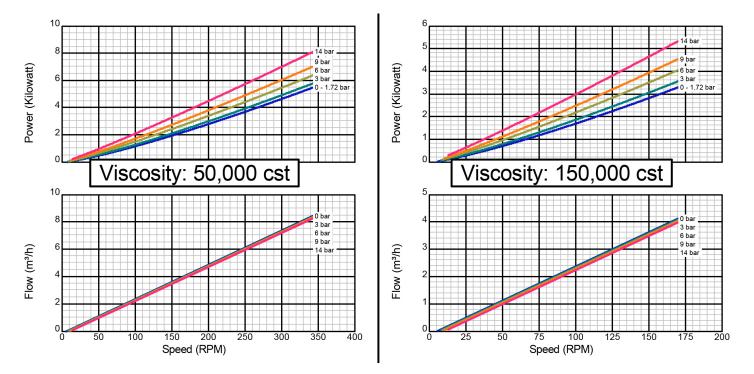

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatabilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.

Created on November 30, 2000