
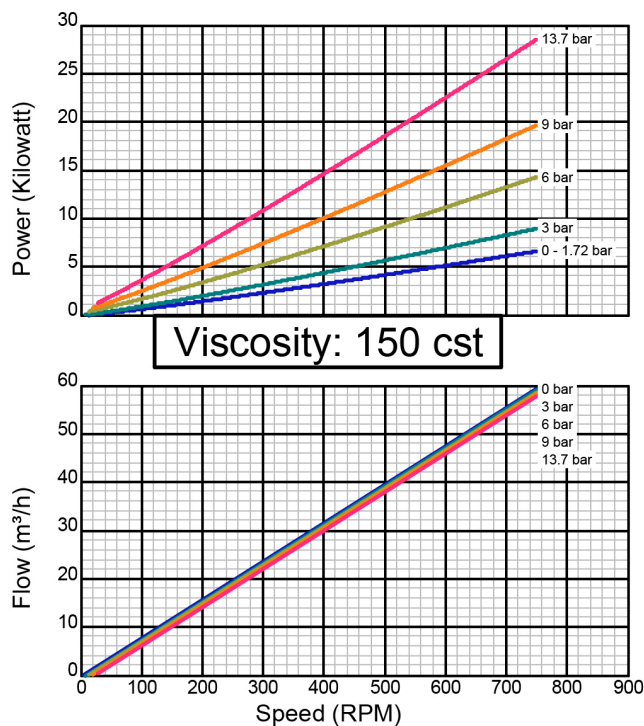
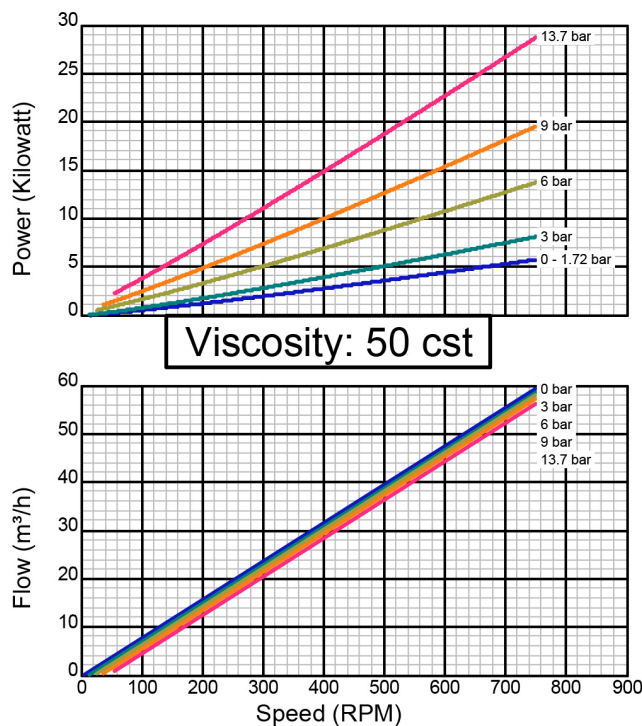
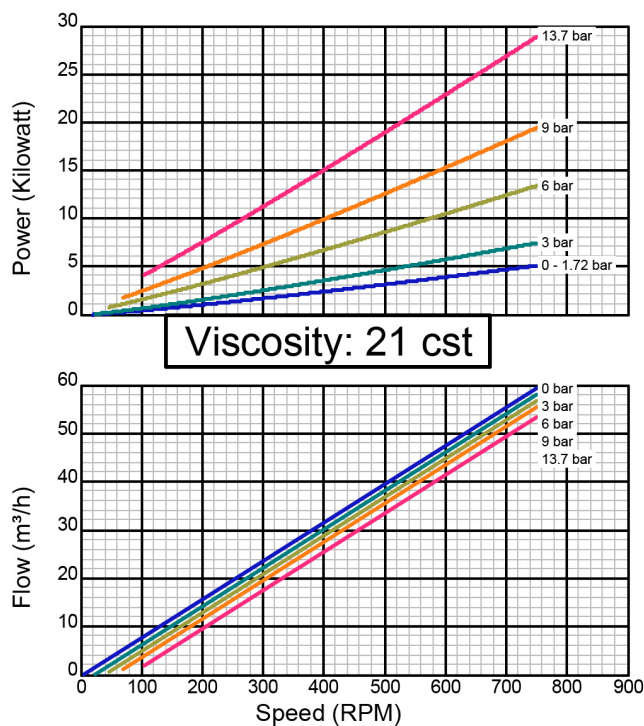


Model GG250I

Iron Construction

Standard Clearance

2" Std. Port Size

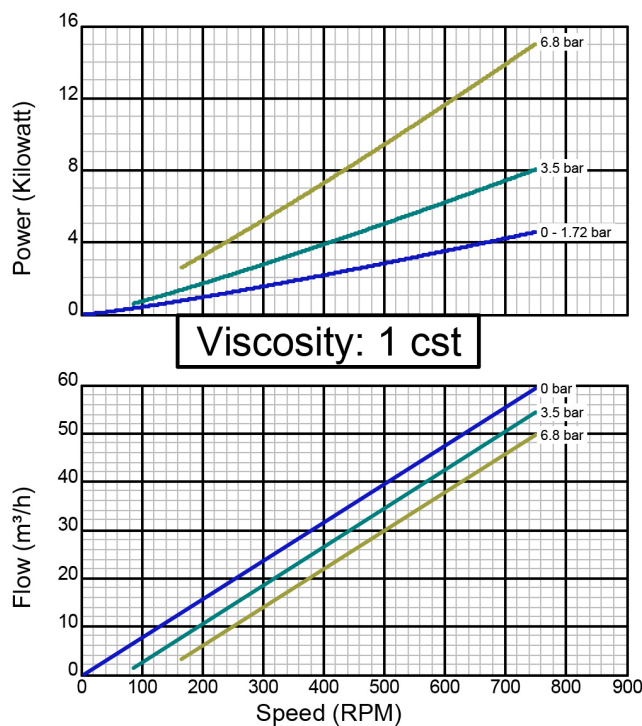

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.

*Created on
November 30, 2000*





Excellence at work. Excellence in life.

Model GG250I

Iron Construction

Standard Clearance

2" Std. Port Size

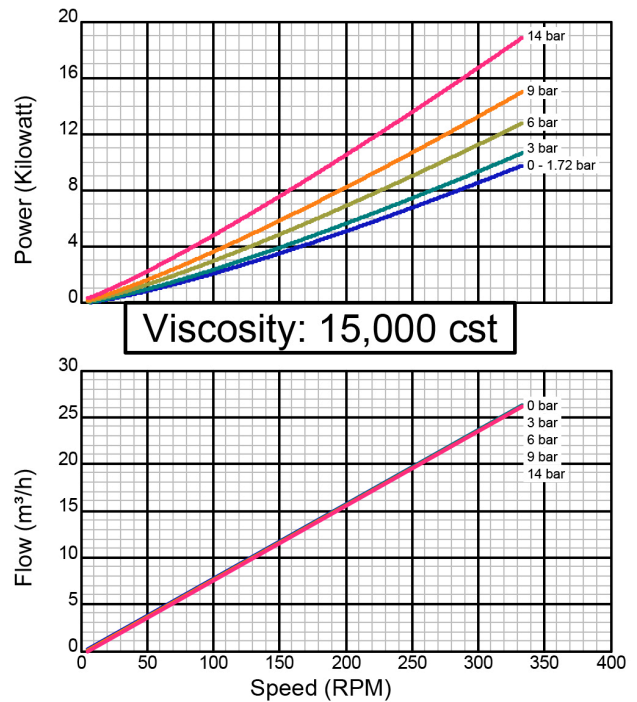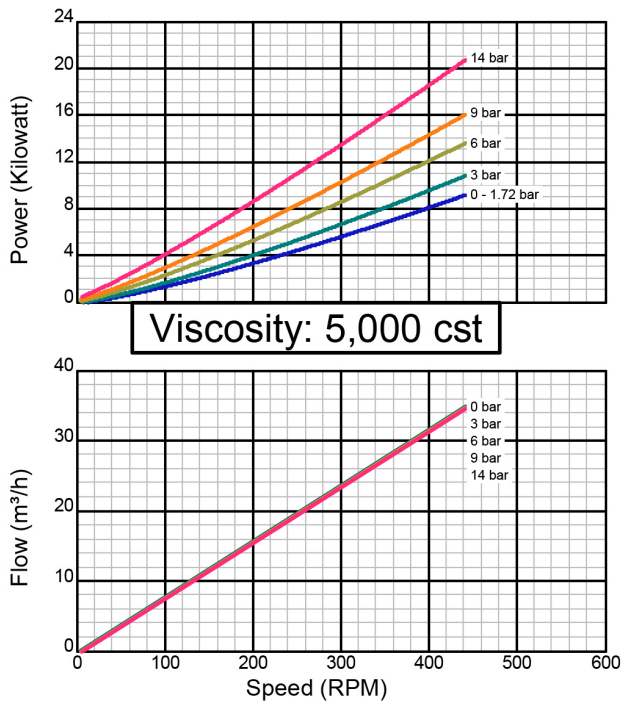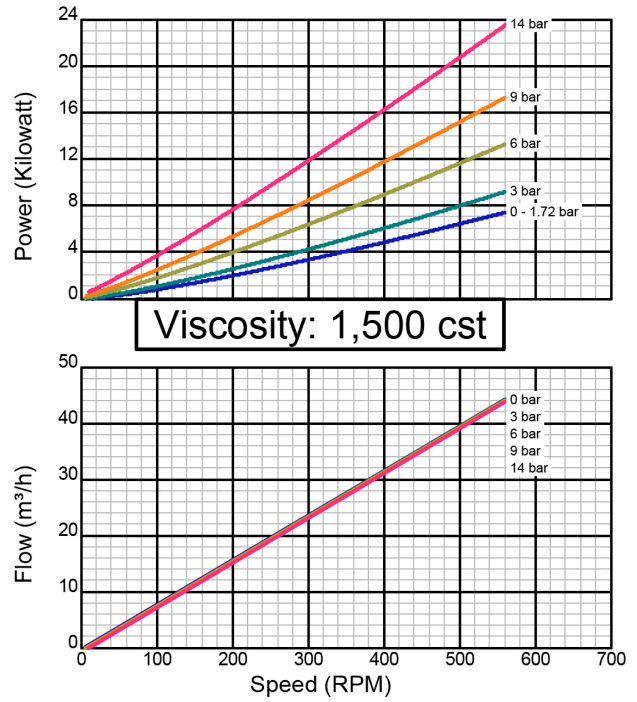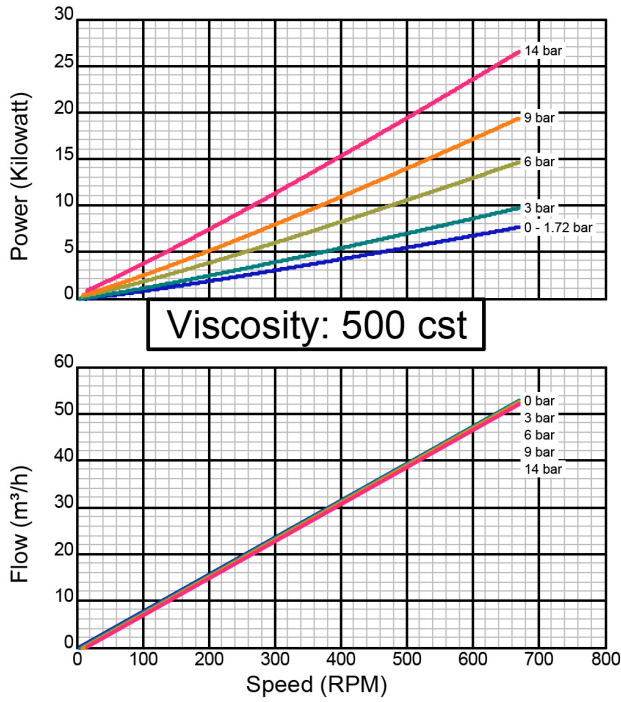

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.



Created on
November 30, 2000

Model GG250I

Iron Construction

Standard Clearance

2" Std. Port Size

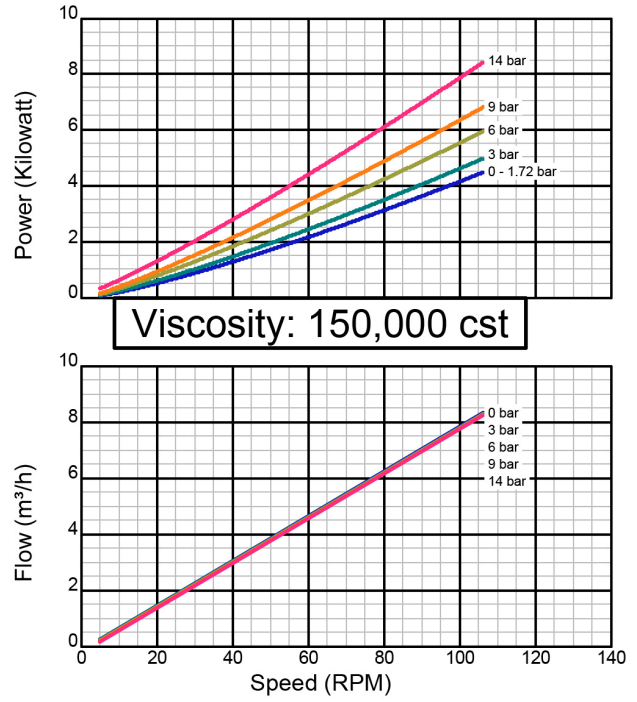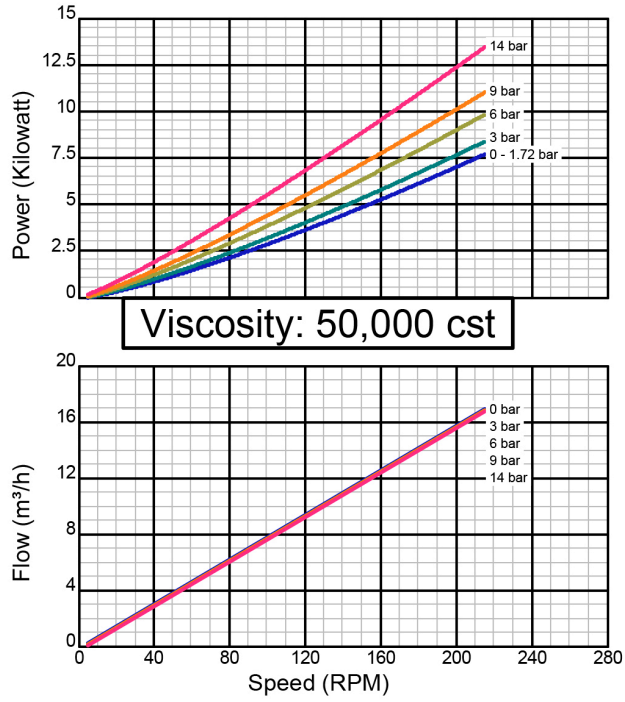

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.


Created on
November 30, 2000

Model GG250S



Stainless Steel Construction

Standard Clearance



2" Std. Port Size

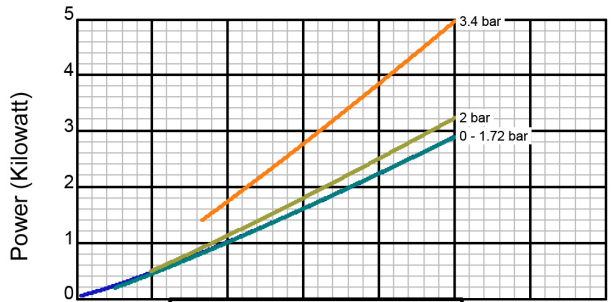



Viscosity: 1 cst

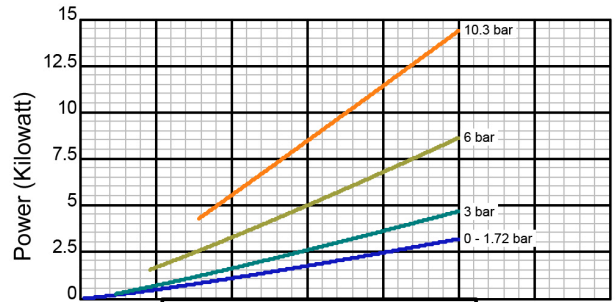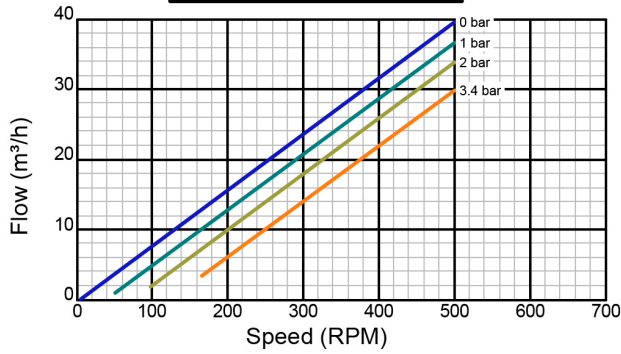


Viscosity: 21 cst

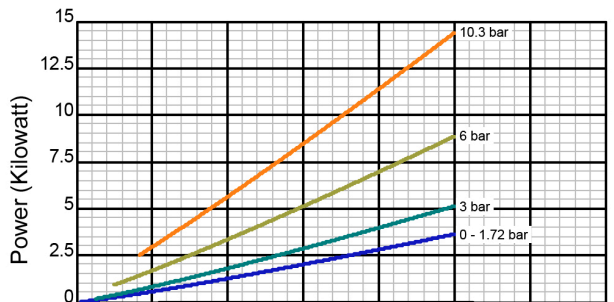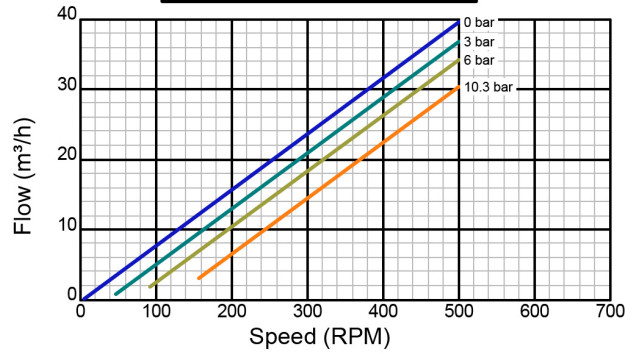

Viscosity: 50 cst

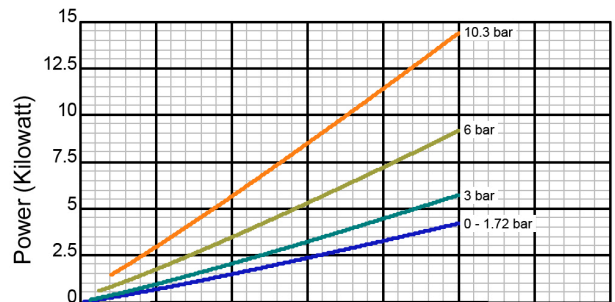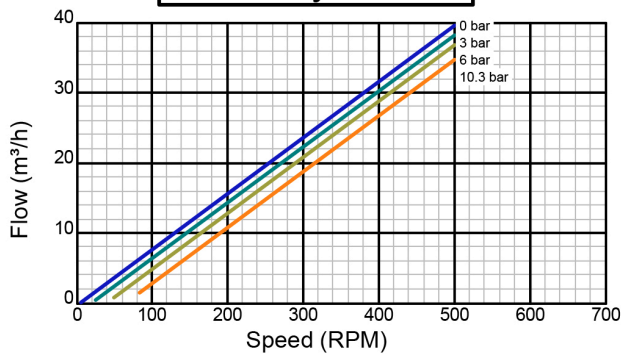

Viscosity: 150 cst

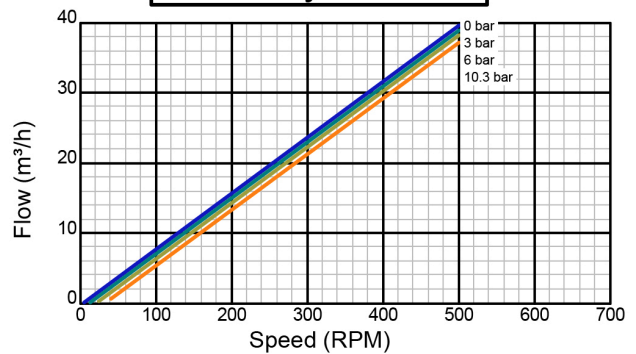

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.





Created on
November 30, 2000

Model GG250S

Stainless Steel Construction

Standard Clearance

2" Std. Port Size

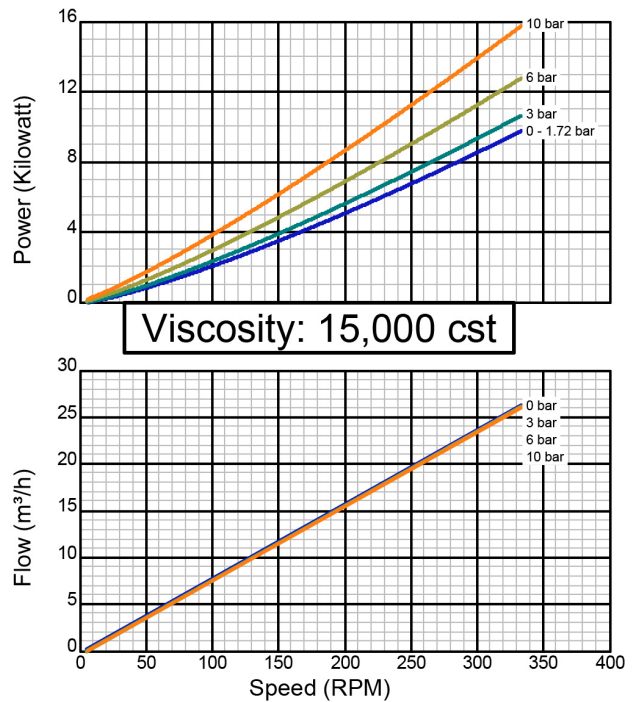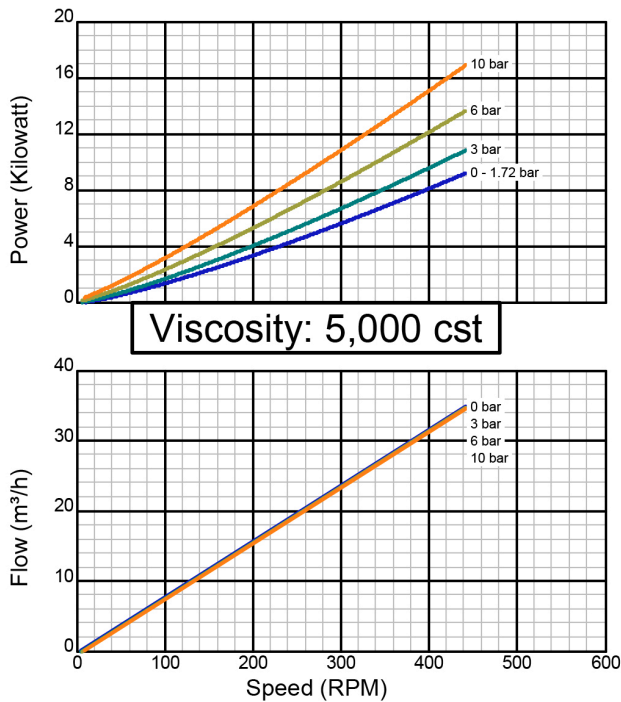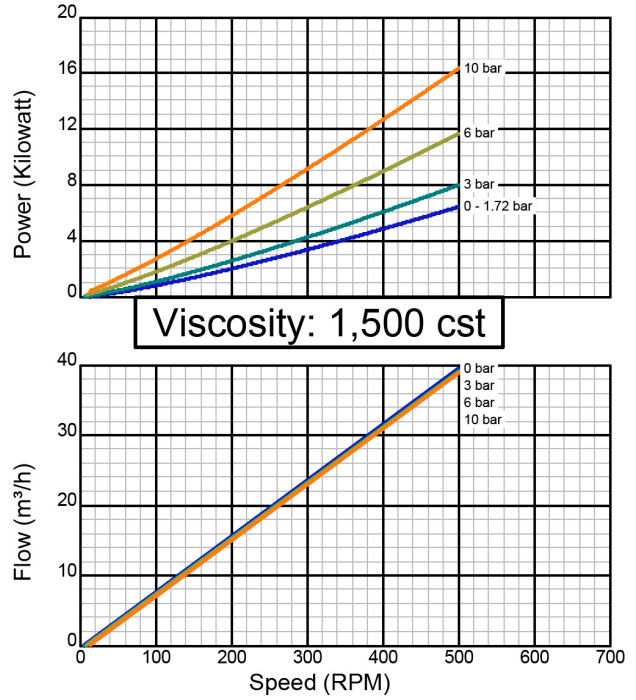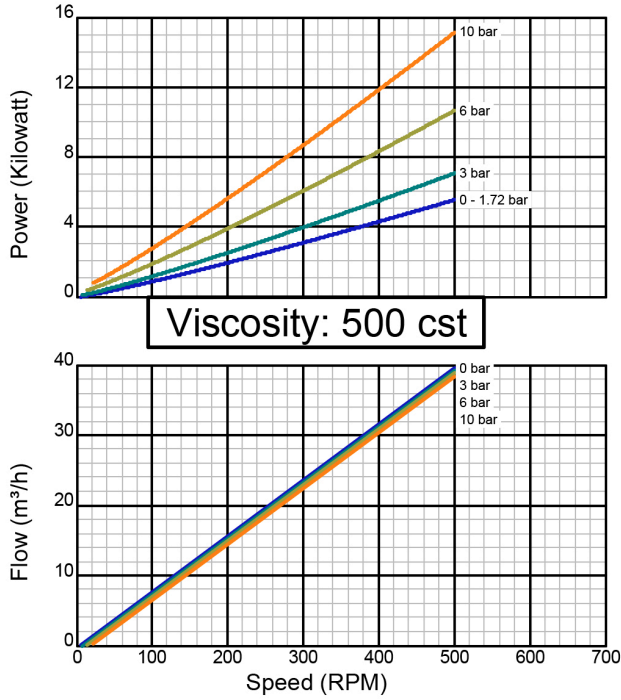

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.



Created on
November 30, 2000

Model GG250S

Stainless Steel Construction

Standard Clearance

2" Std. Port Size

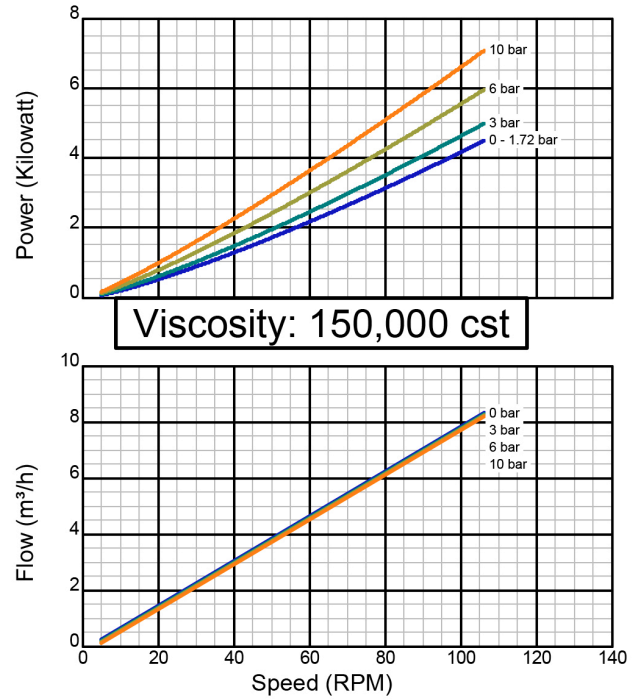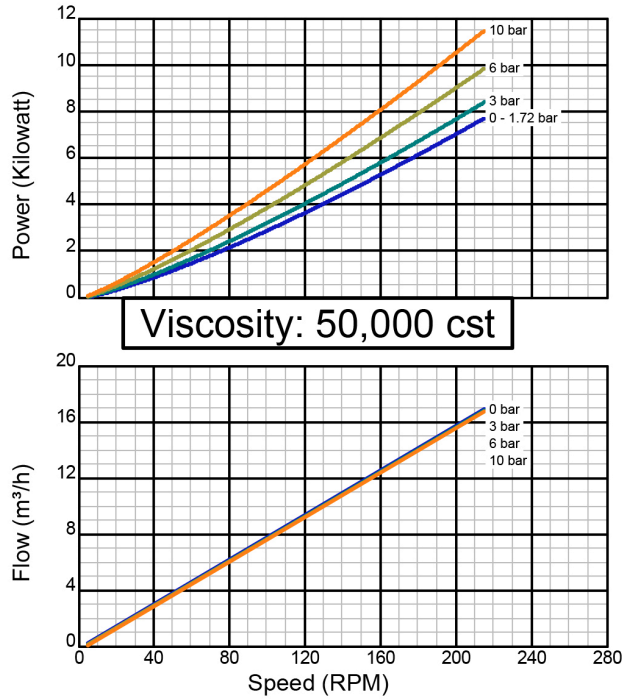

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.

Created on
November 30, 2000