
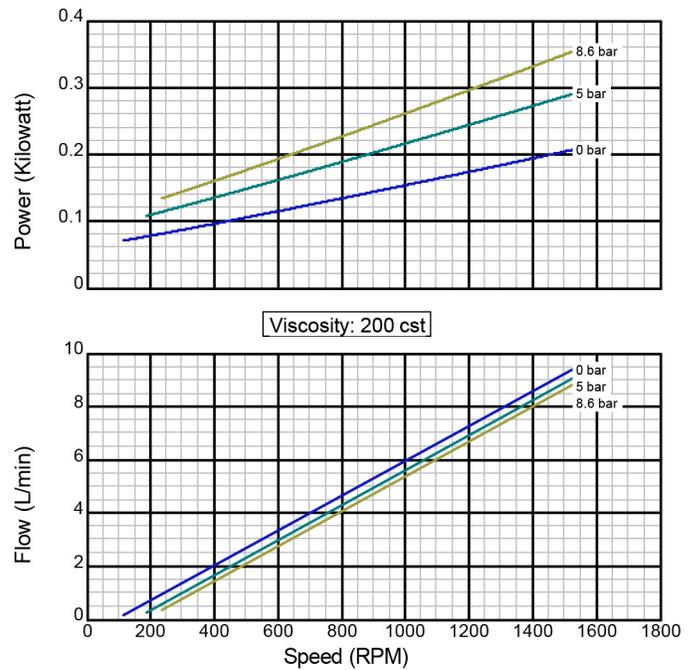
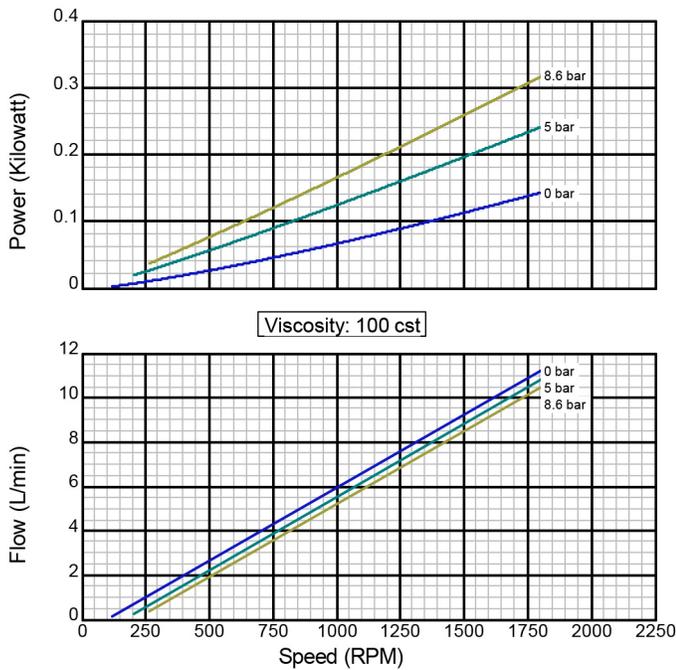
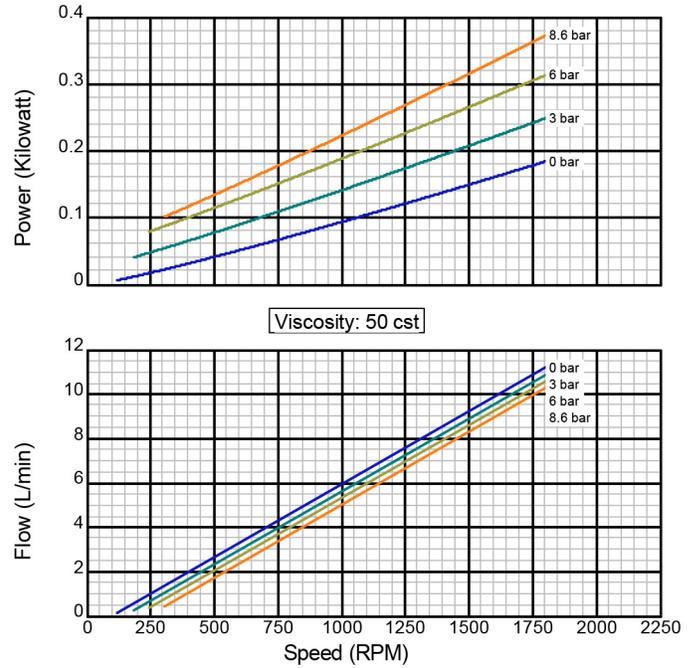


### Model 1C

Iron Construction

Standard Clearance

9.525 mm Std. Port Size

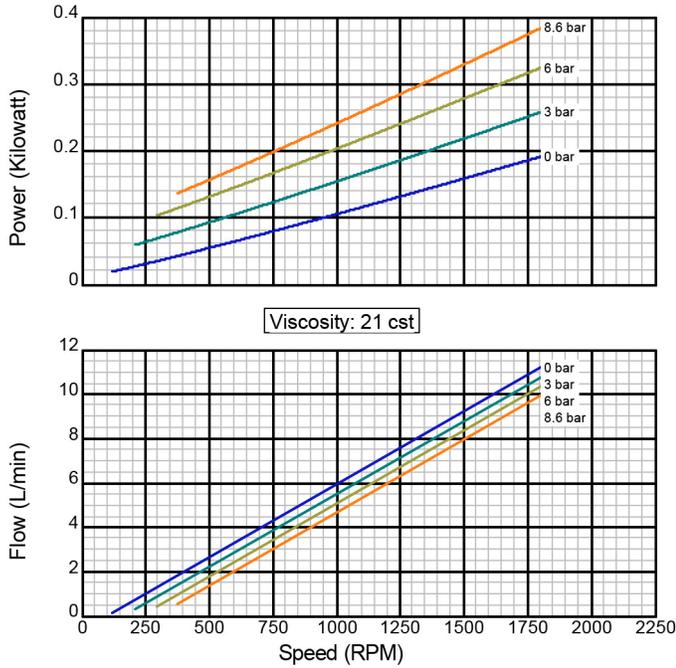

*There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.*


*Created on November 30, 2000*

# Model 1C



Iron Construction

Standard Clearance


9.525 mm Std. Port Size

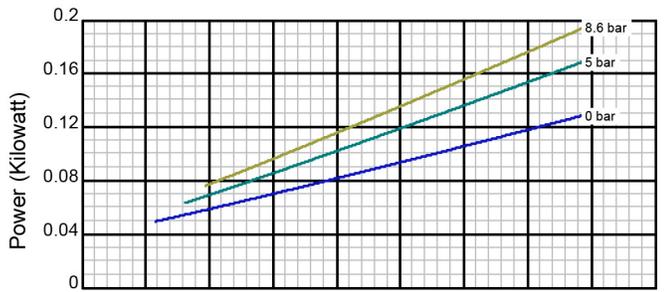

Viscosity: 1,000 cst

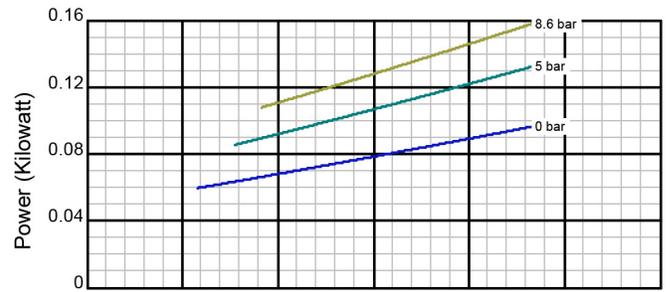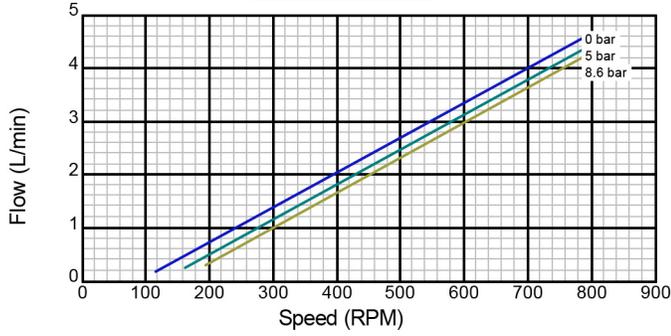

Viscosity: 2,000 cst

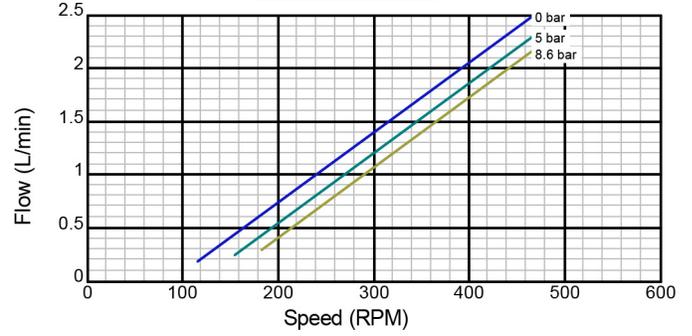

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.





Created on November 30, 2000

# Model 2C

Iron Construction

Standard Clearance

25.4 mm Std. Port Size

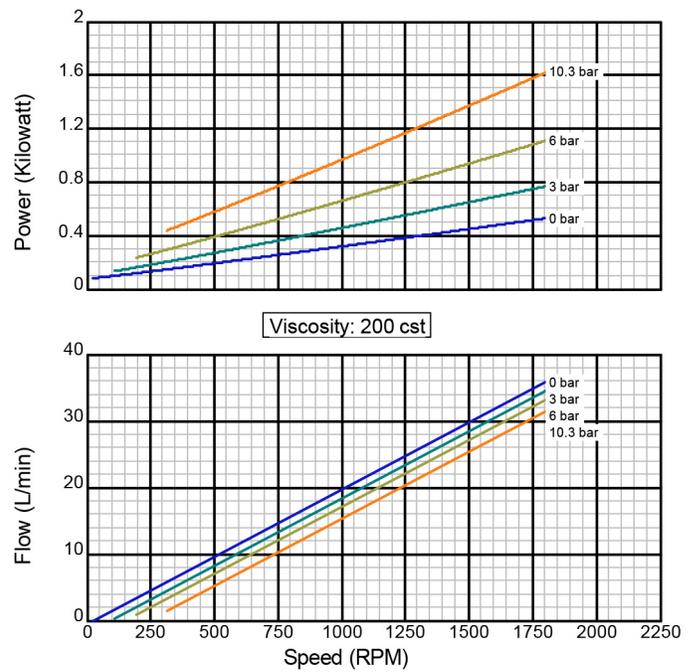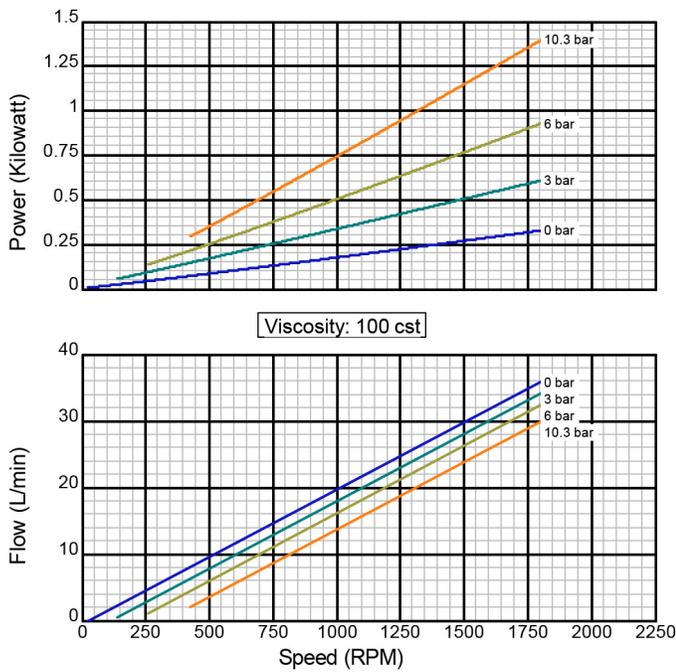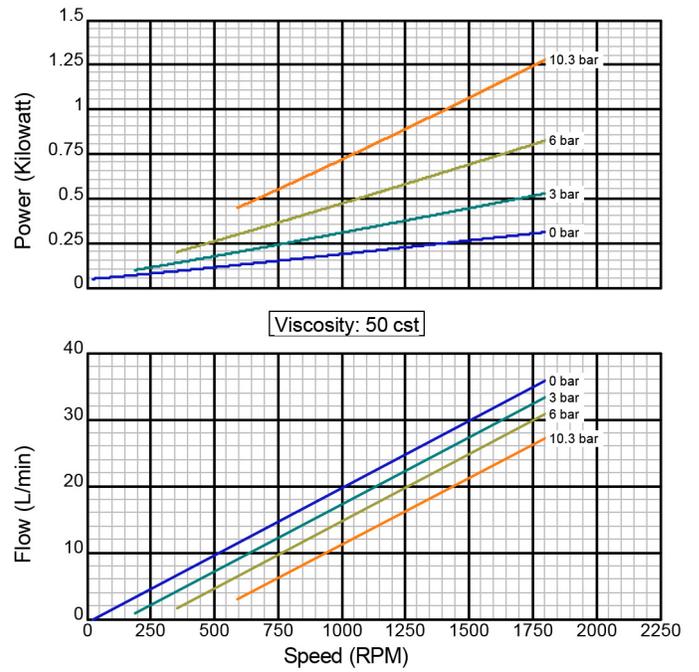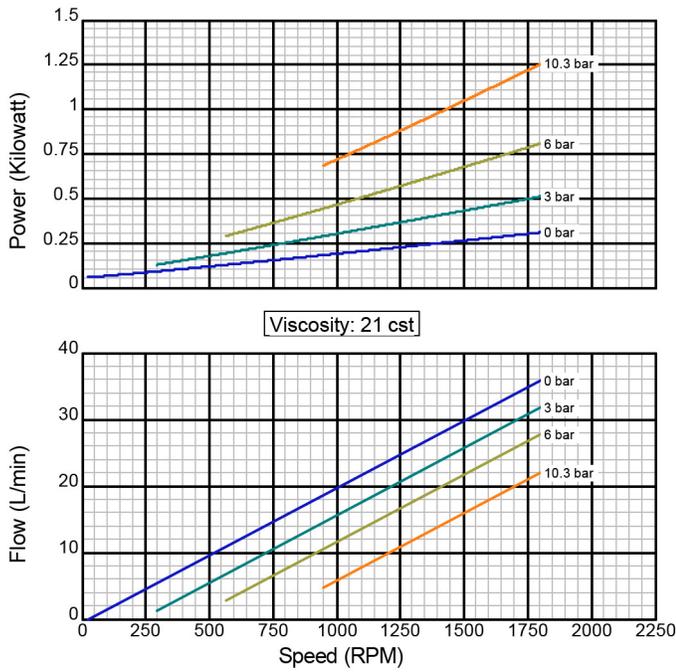

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.




Created on November 30, 2000

# Model 2C

Iron Construction

Standard Clearance

25.4 mm Std. Port Size

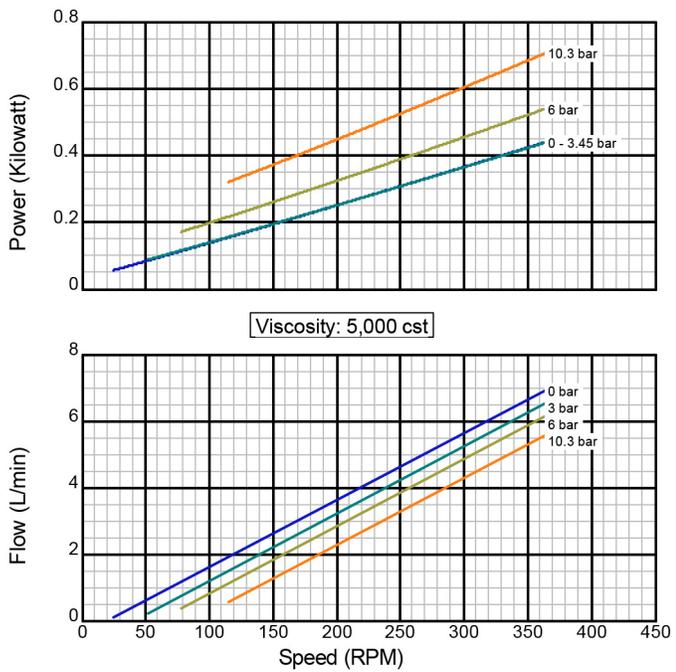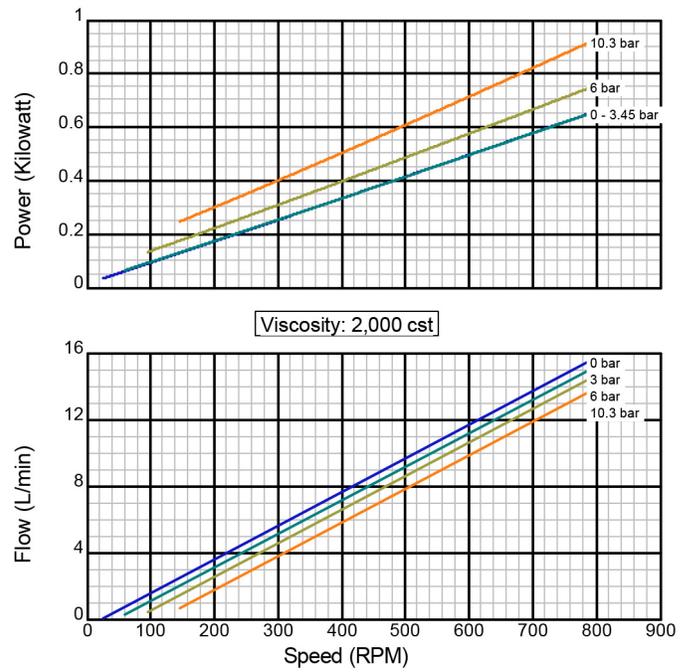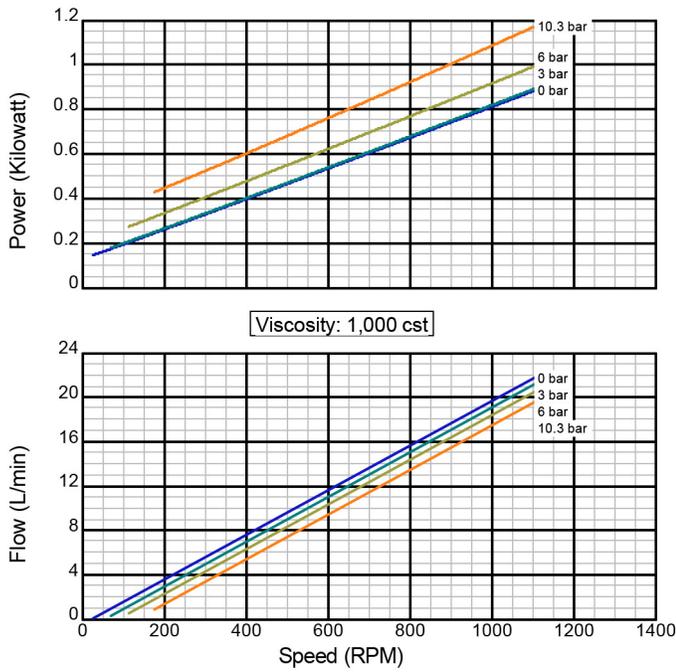

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.





Created on November 30, 2000

# Model 3C

Iron Construction

Standard Clearance

31.75 mm Std. Port Size

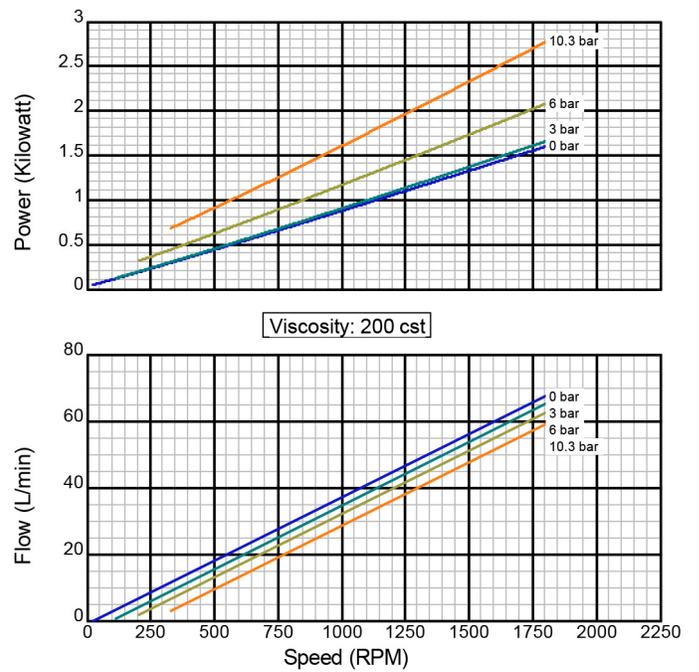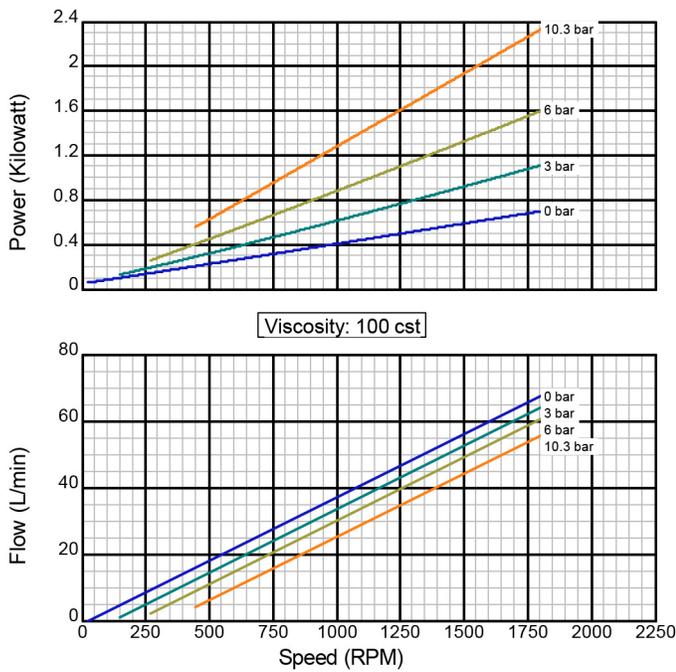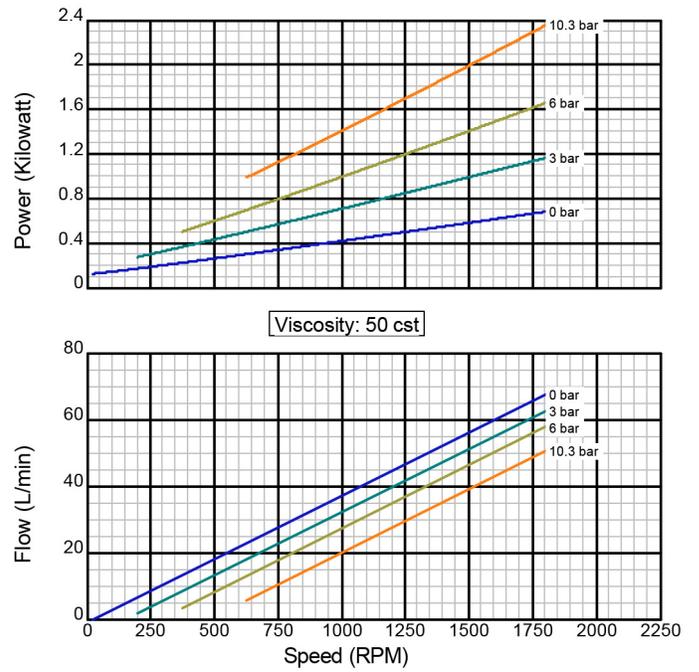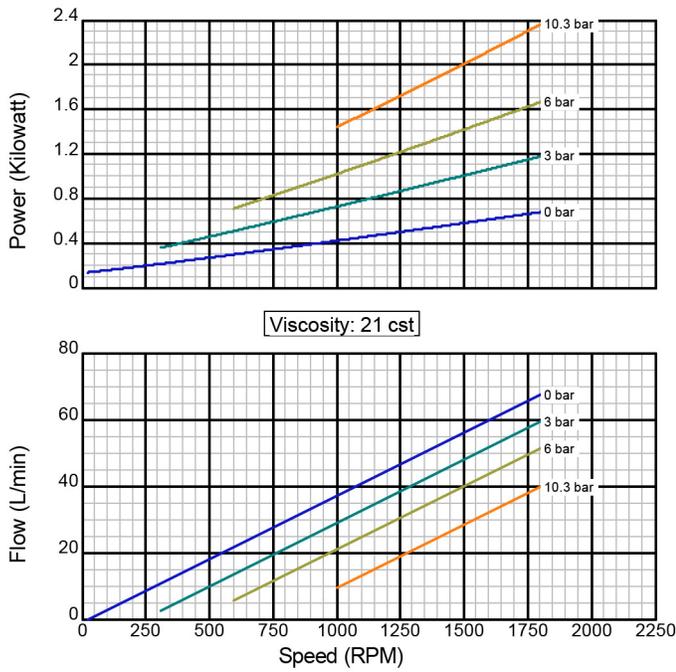

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.


Created on November 30, 2000

# Model 3C



Iron Construction

Standard Clearance



31.75 mm Std. Port Size

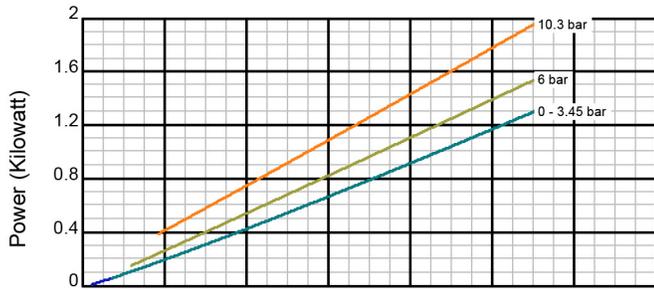


Viscosity: 1,000 cst

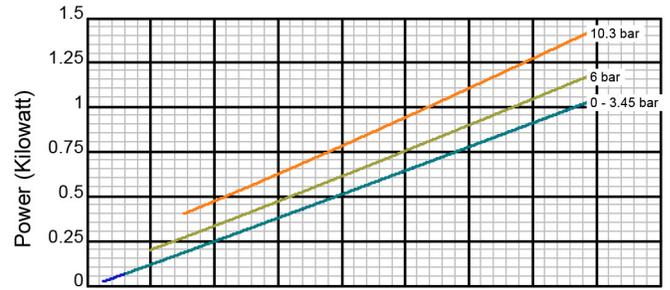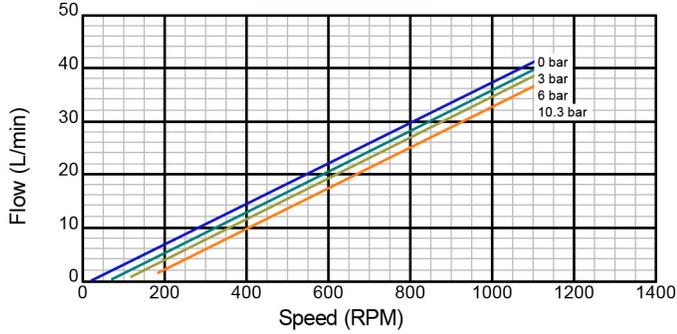

Viscosity: 2,000 cst

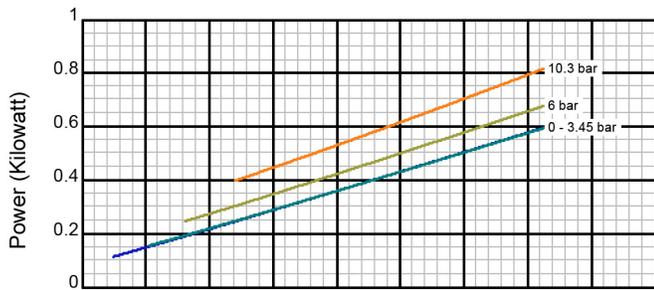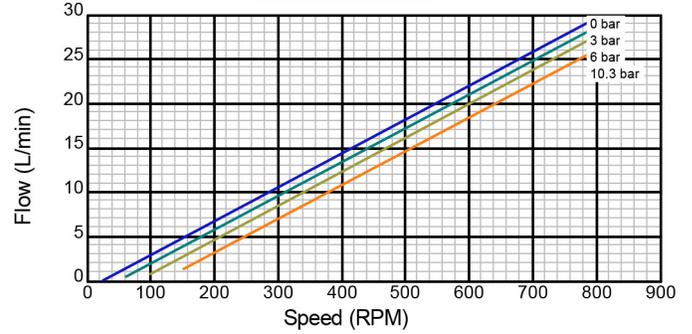

Viscosity: 5,000 cst

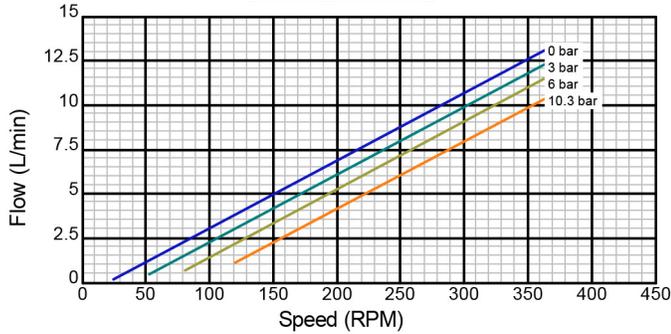

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.


Created on November 30, 2000

# Model 4C



Iron Construction

Standard Clearance



38.1 mm Std. Port Size

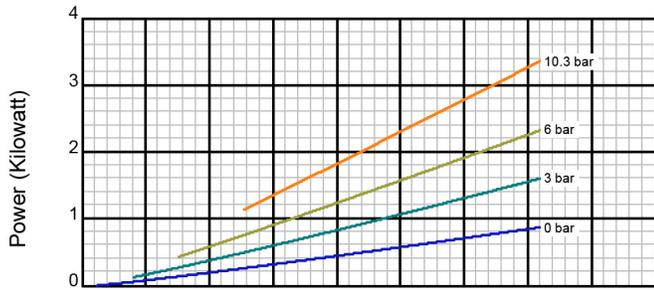



Viscosity: 21 cst

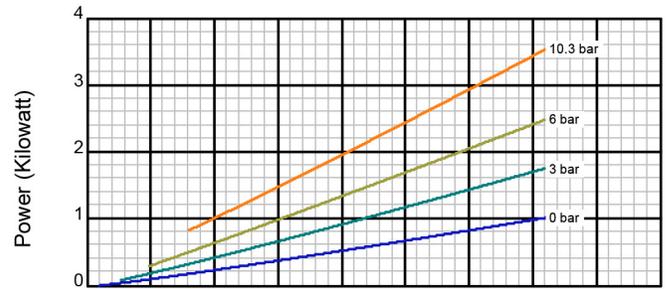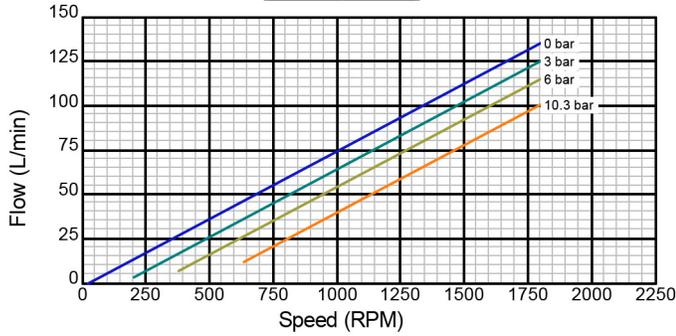


Viscosity: 50 cst

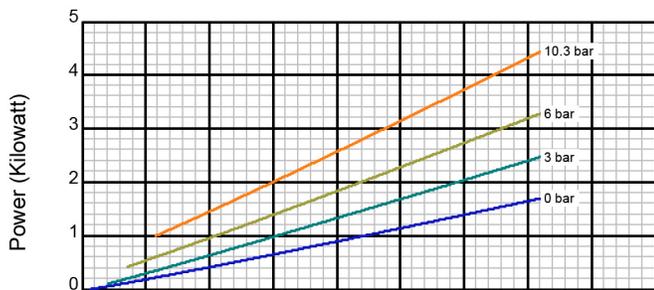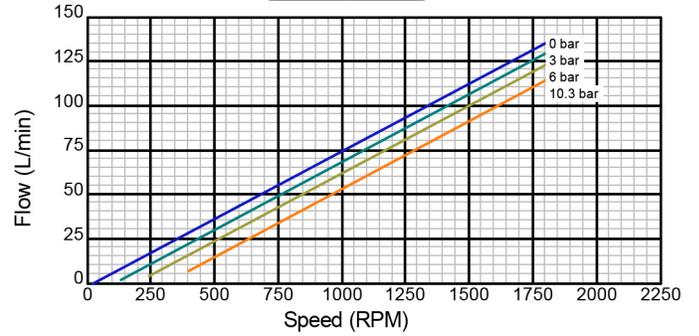

Viscosity: 100 cst

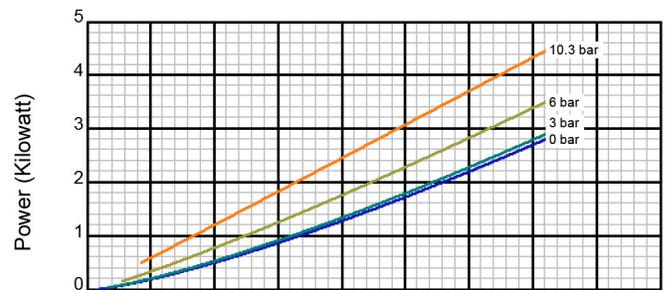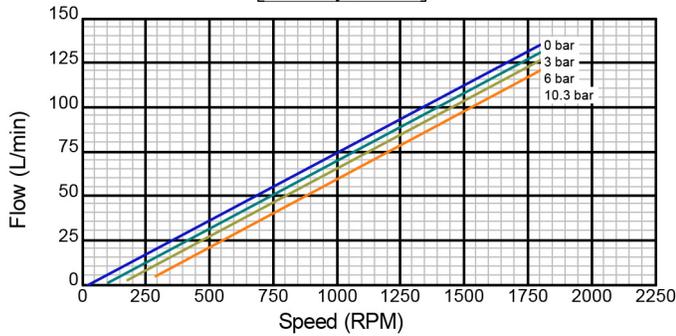

Viscosity: 200 cst

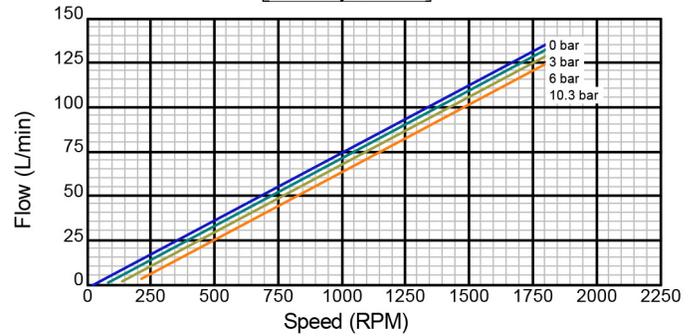

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.


Created on November 30, 2000

# Model 4C



Iron Construction

Standard Clearance



38.1 mm Std. Port Size

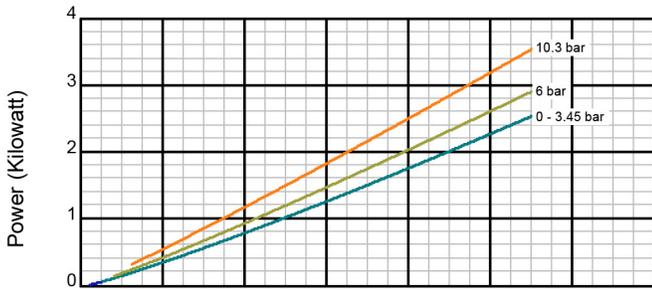


Viscosity: 1,000 cst

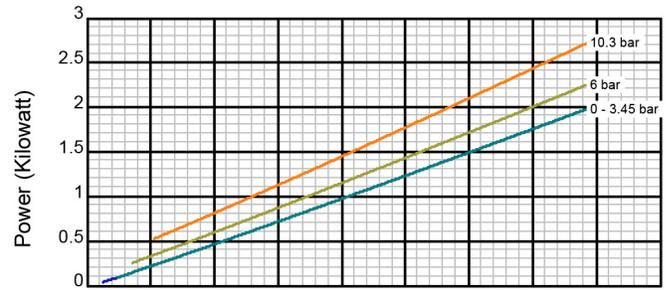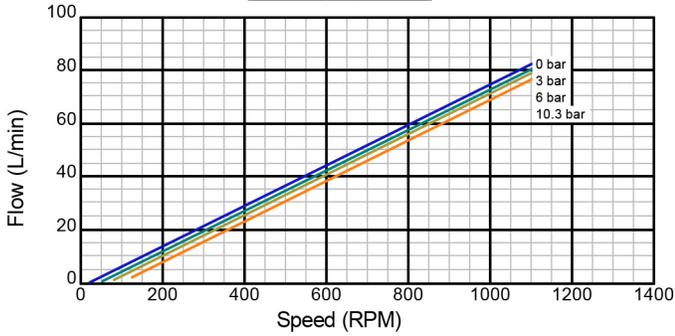

Viscosity: 2,000 cst

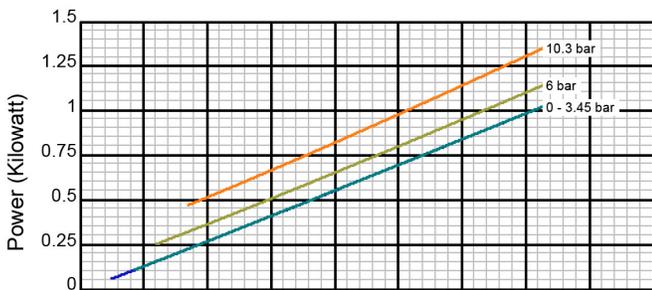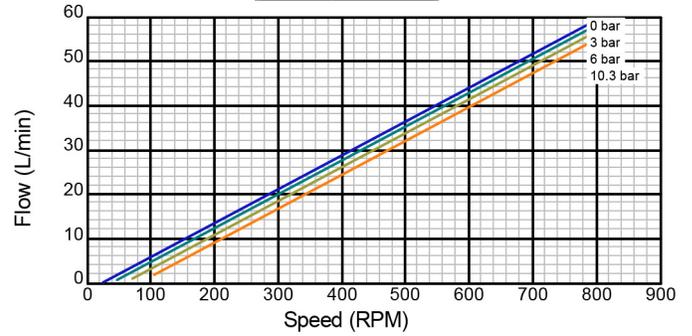

Viscosity: 5,000 cst

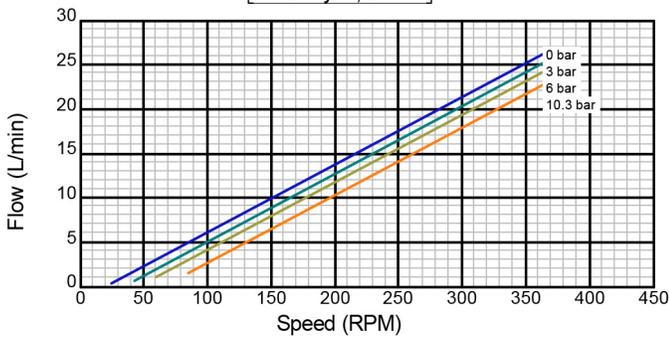

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.


Created on November 30, 2000

# Model 5C



Iron Construction

Standard Clearance



38.1 mm Std. Port Size

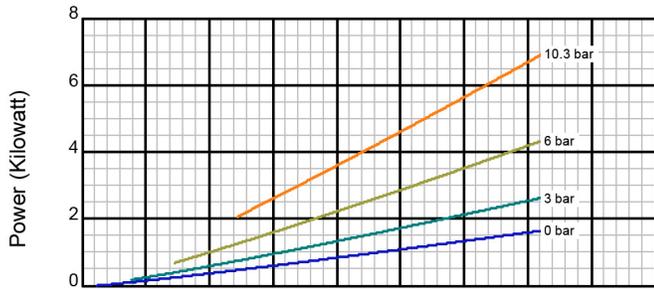



Viscosity: 21 cst

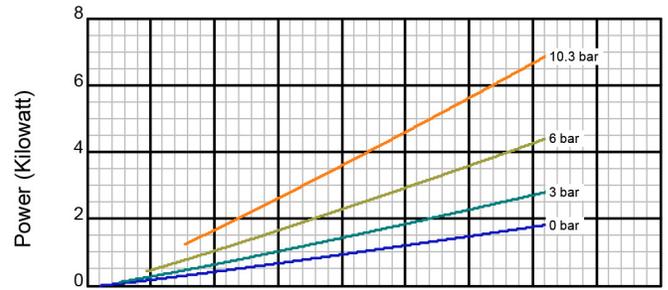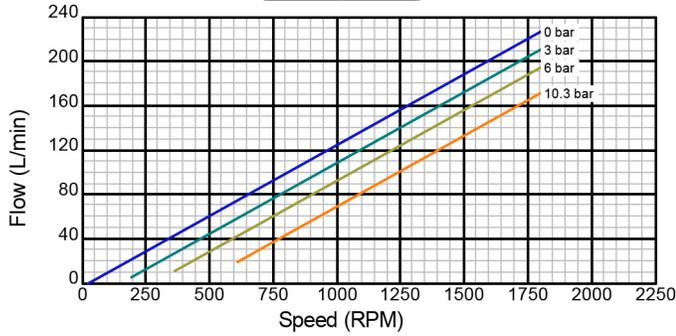


Viscosity: 50 cst

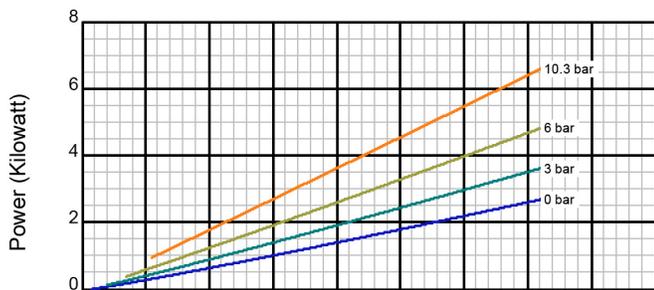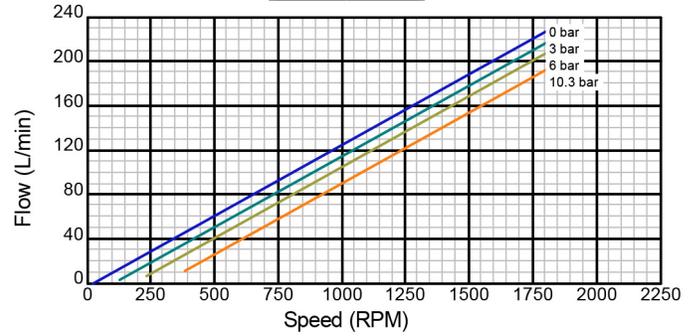

Viscosity: 100 cst

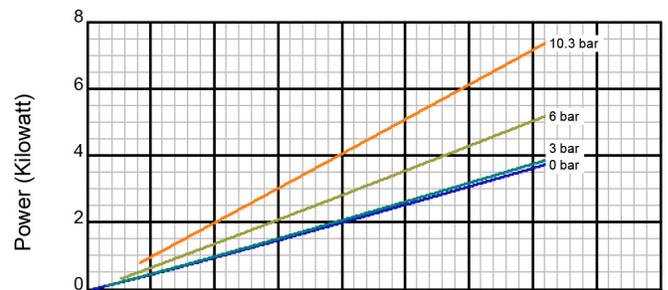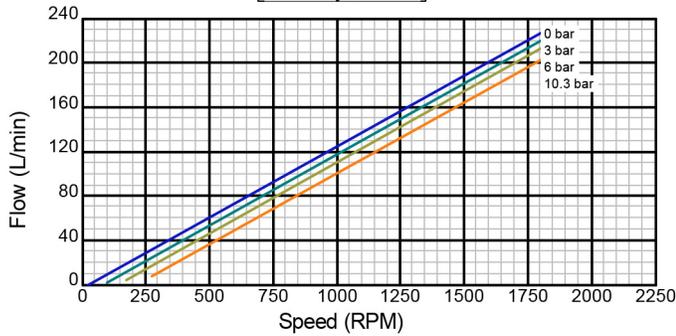

Viscosity: 200 cst

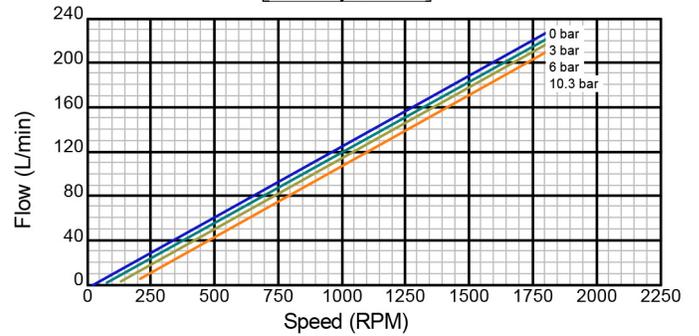

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.


Created on November 30, 2000

# Model 5C



Iron Construction

Standard Clearance



38.1 mm Std. Port Size

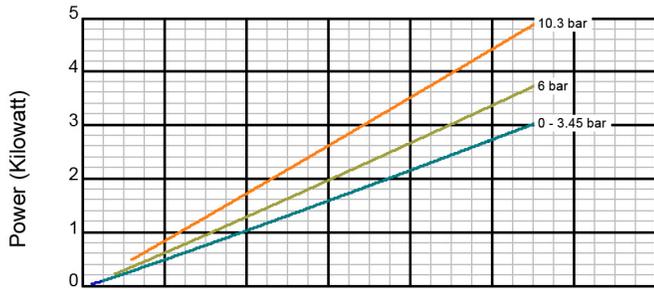


Viscosity: 1,000 cst

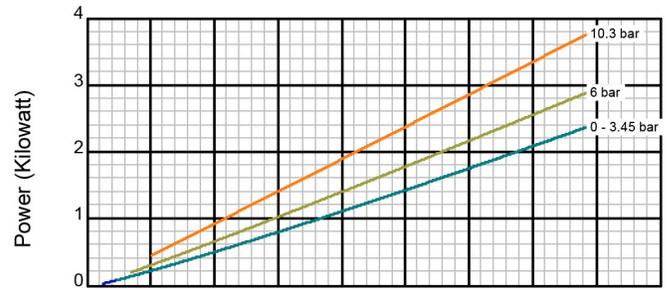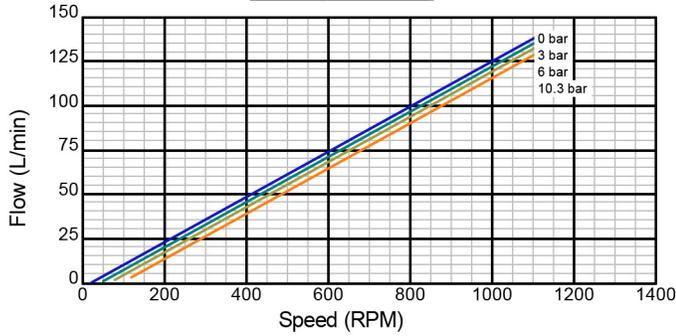

Viscosity: 2,000 cst

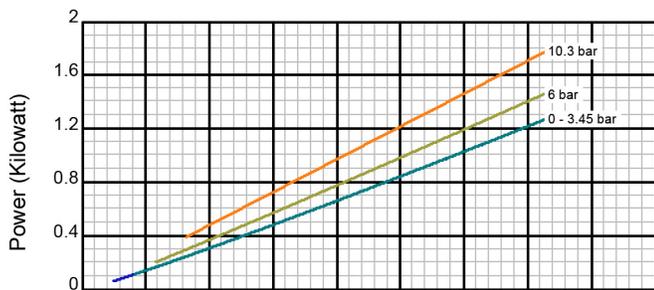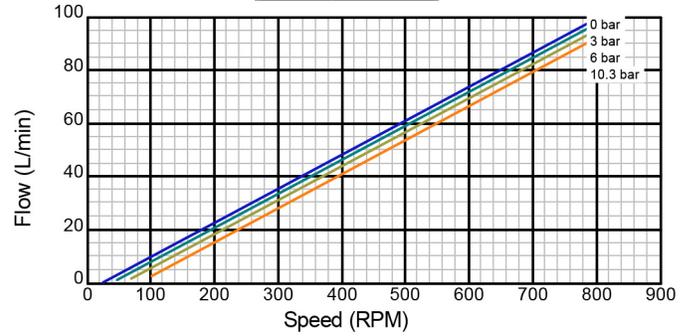

Viscosity: 5,000 cst

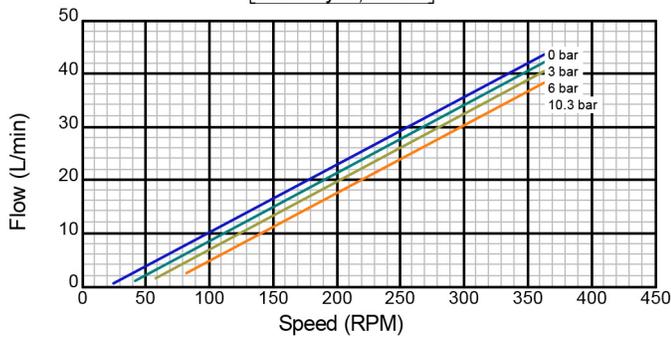

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.





Created on November 30, 2000

# Model 6C

Iron Construction

Standard Clearance

50.8 mm Std. Port Size

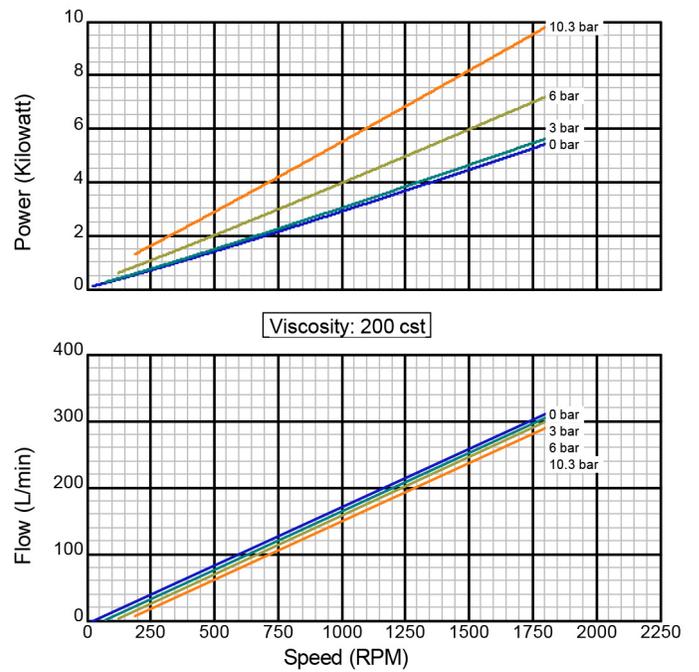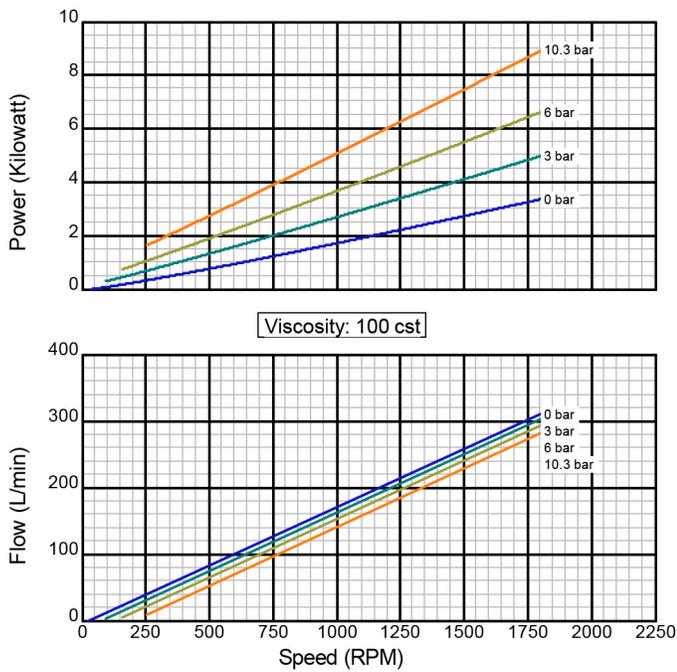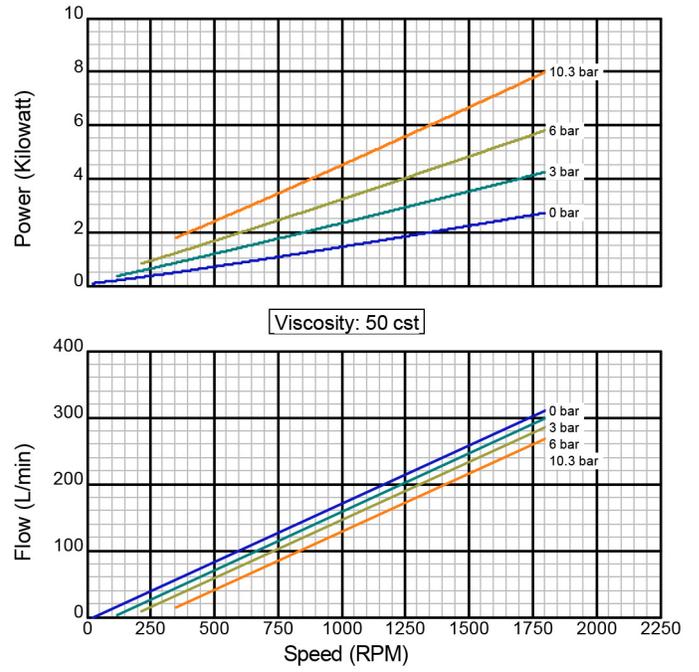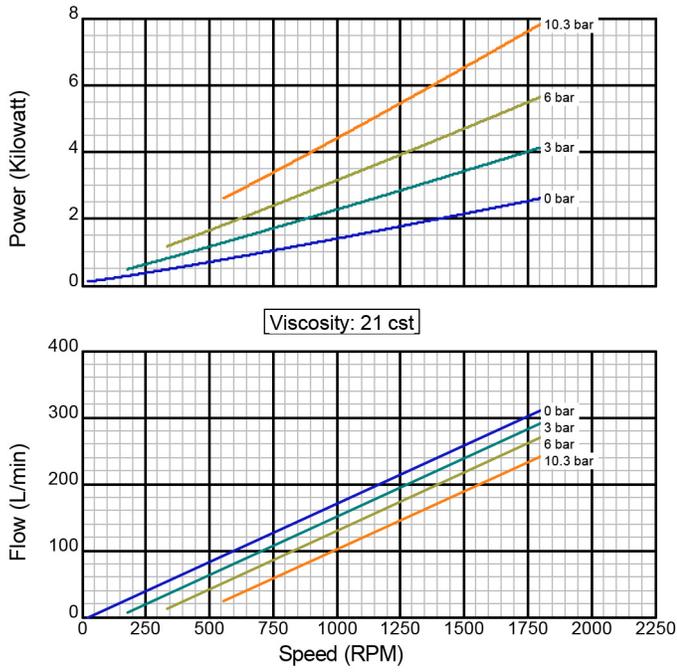

*There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.*


*Created on November 30, 2000*

# Model 6C



Iron Construction

Standard Clearance



50.8 mm Std. Port Size

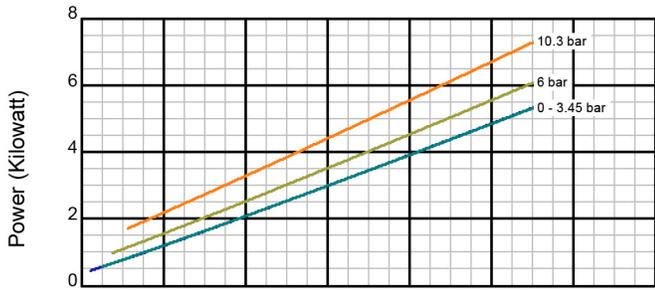


Viscosity: 1,000 cst

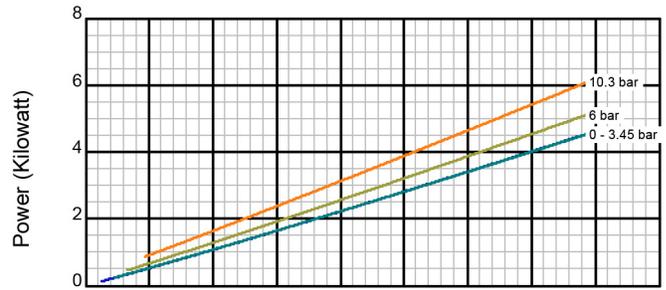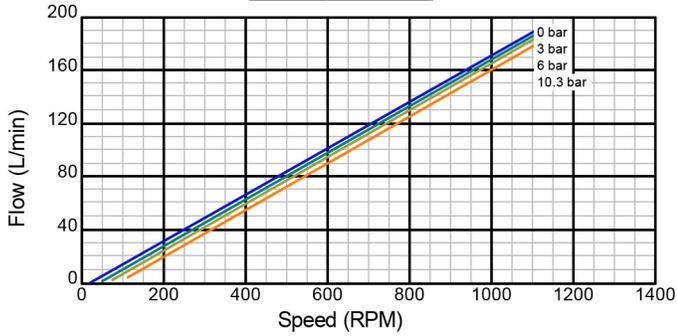

Viscosity: 2,000 cst

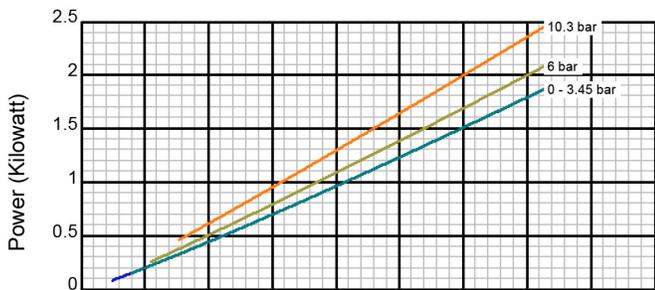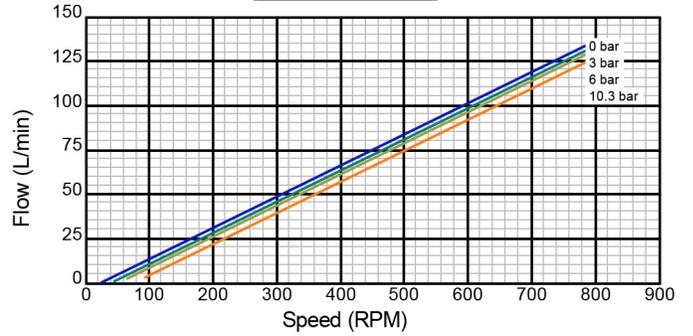

Viscosity: 5,000 cst

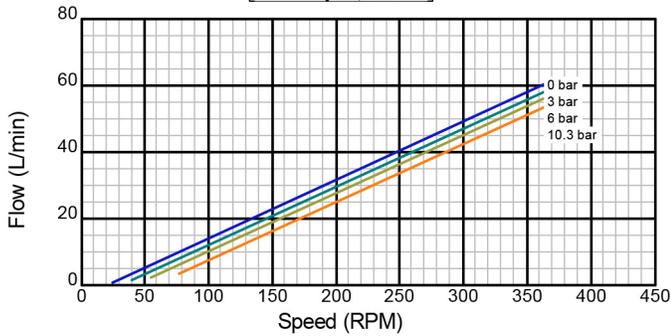

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.

Created on November 30, 2000