
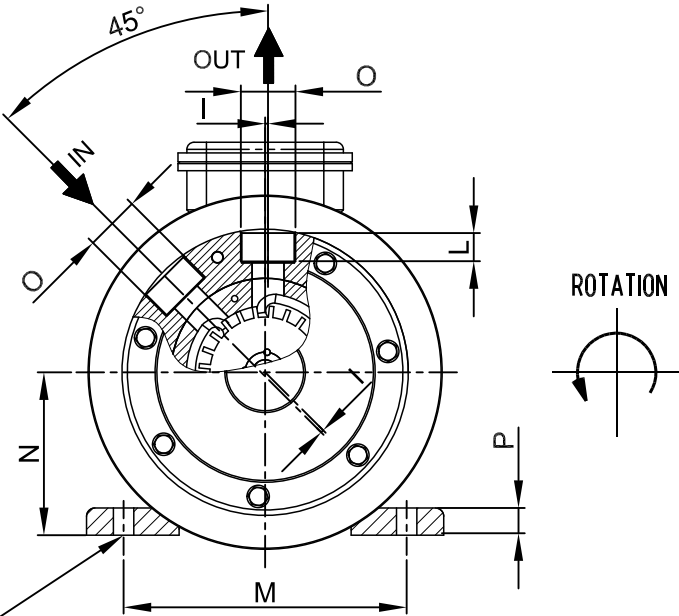


OUTLINE DRAWING

CODE: D 10327 Rev.:00

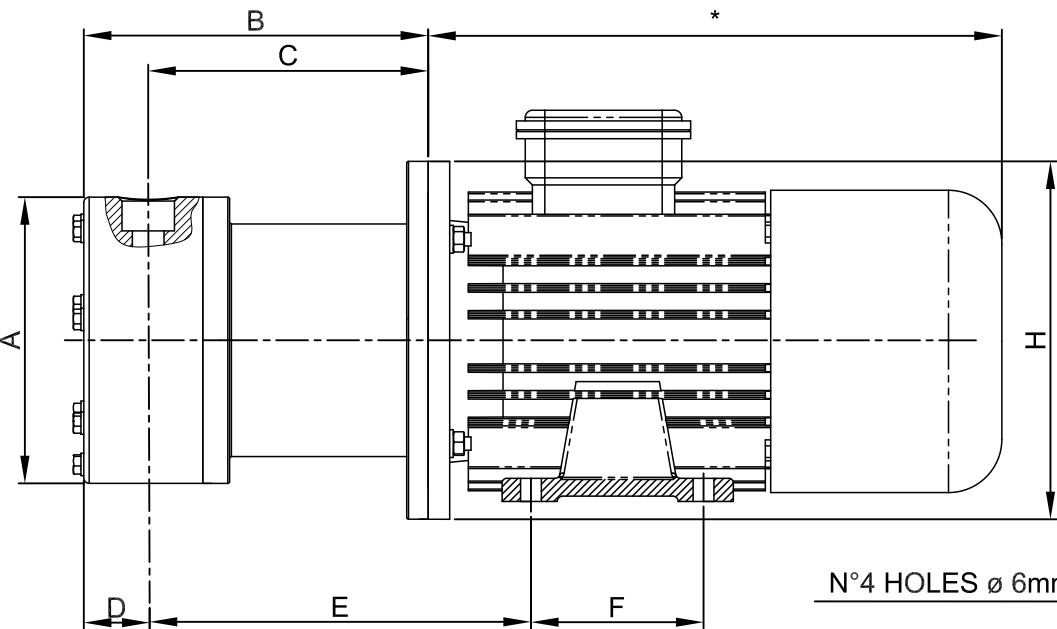

DIMENSIONS

A	B	C	D	E	F	H	I	L	M	N	P		
120	130	99	31	135	71	120	4.2	14	90	56	10		
- This drawing is for reference only - Pump may be supplied without motor - All dimensions are in millimeters - All T MAG-P pumps are reversibles	* Depend on the manufacturer												



Suction / Discharge Port	external magnet
O	
1/2" BSP-F/NPT-F	

Pump model: T MAG-P22 PP/PVDF
ITEM:
Version with plastic bracket

Motor: IEC Gr56 B3-B5
Port connection: Threaded
Standard: BSP-F UNI ISO 228/1 | NPT-F USAS B2-1/1968

OUTLINE DRAWING

CODE: D 10091 Rev.:00

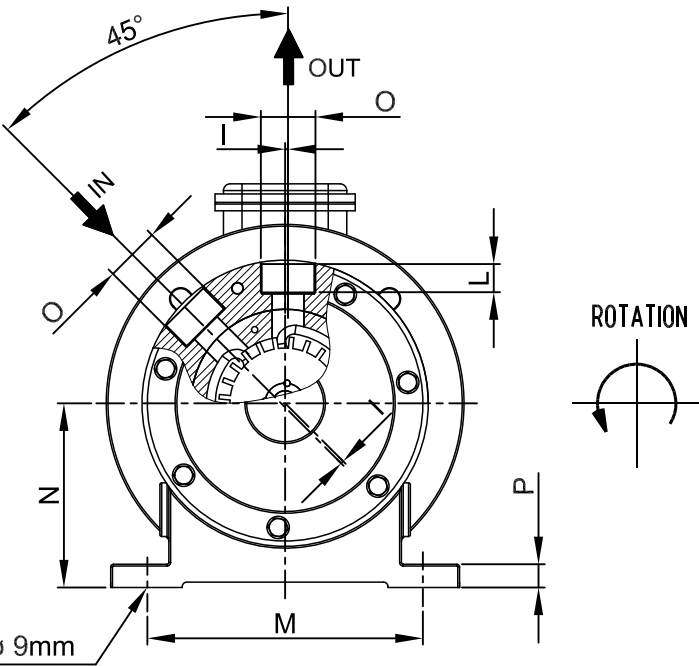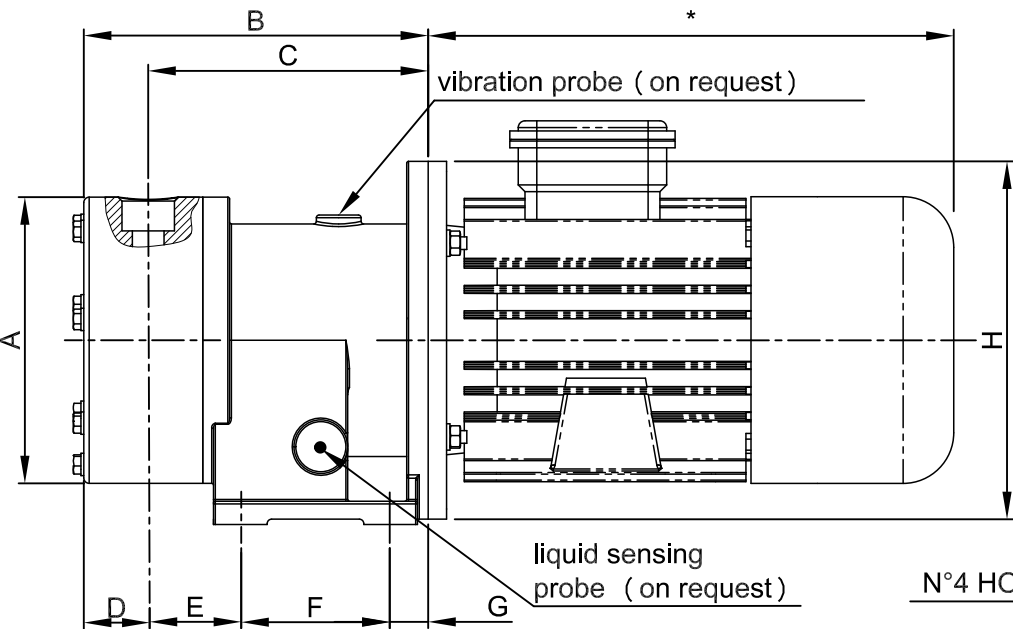

DIMENSIONS

A	B	C	D	E	F	G	H	I	L	M	N	P	
140	148	117	31	44.5	55	17.5	140	4.2	16	125	75	10	
- This drawing is for reference only - Pump may be supplied without motor - All dimensions are in millimeters - All T MAG-P pumps are reversibles	* Depend on the manufacturer												

Suction / Discharge Port	external magnet
O	
1/2" BSP-F/NPT-F	



Pump model: T MAG-P23 PP/PVDF
ITEM:

Motor: IEC Gr63 B5
Port connection: Threaded

Standard: BSP-F UNI ISO 228/1 | NPT-F USAS B2-1/1968

OUTLINE DRAWING

CODE: D 10096 Rev.:00

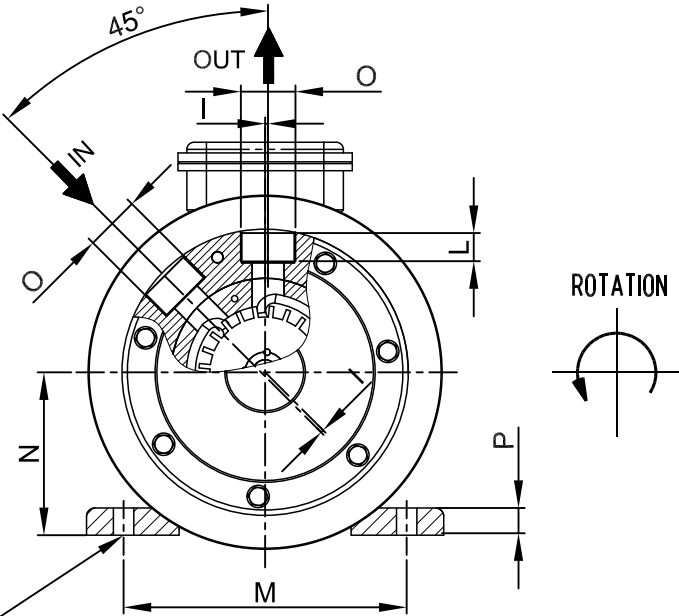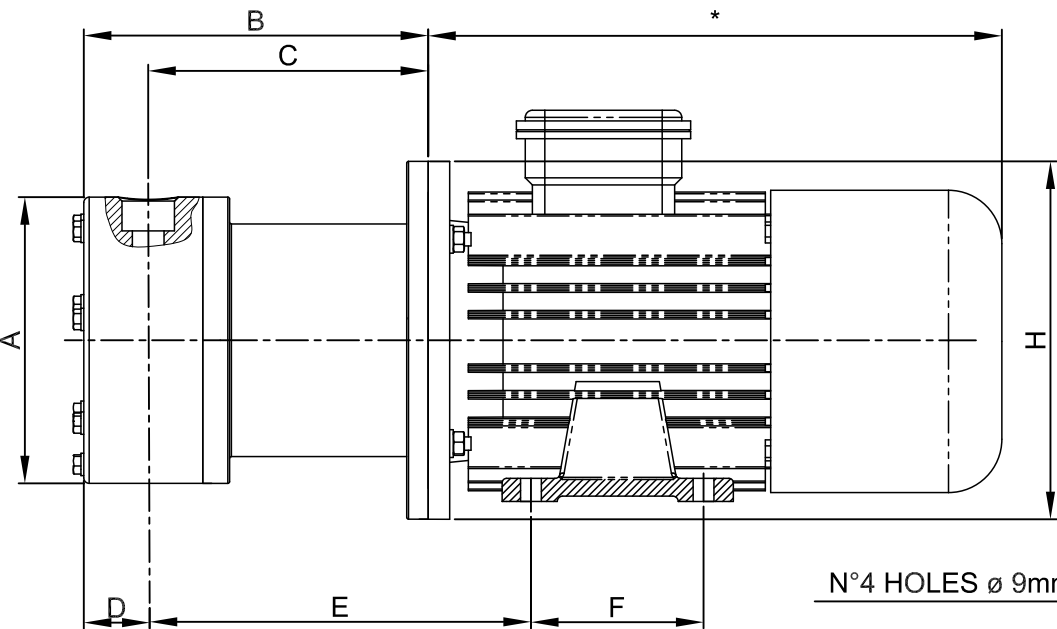

DIMENSIONS

A	B	C	D	E	F	H	I	L	M	N	P		
140	148	117	31	157	80	140	4.2	16	100	63	8		
- This drawing is for reference only									* Depend on the manufacturer				
- Pump may be supplied without motor													
- All dimensions are in millimeters													
- All T MAG-P pumps are reversibles													



Suction / Discharge Port	external magnet
O	
1/2" BSP-F/NPT-F	

Pump model: T MAG-P23 PP/PVDF
ITEM:
Version with plastic bracket

Motor: IEC Gr63 B3-B5
Port connection: Threaded
Standard: BSP-F UNI ISO 228/1 | NPT-F USAS B2-1/1968

OUTLINE DRAWING

CODE: D 10005 Rev.:00

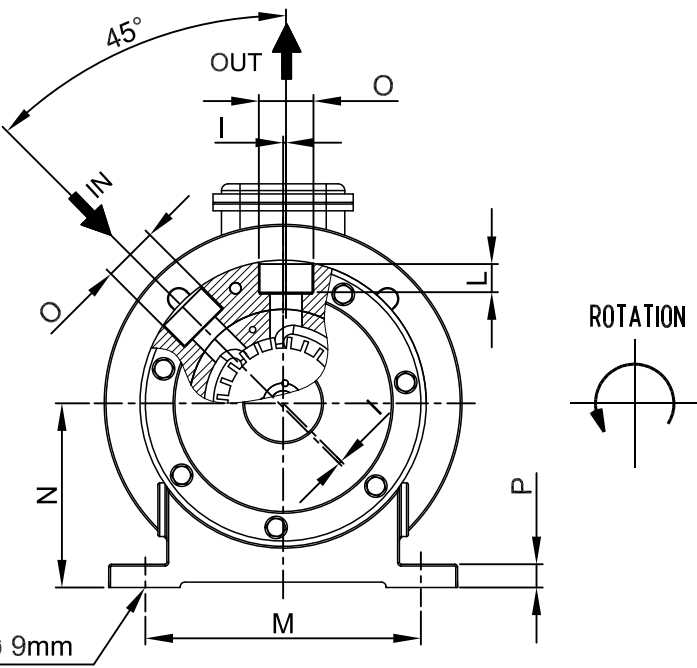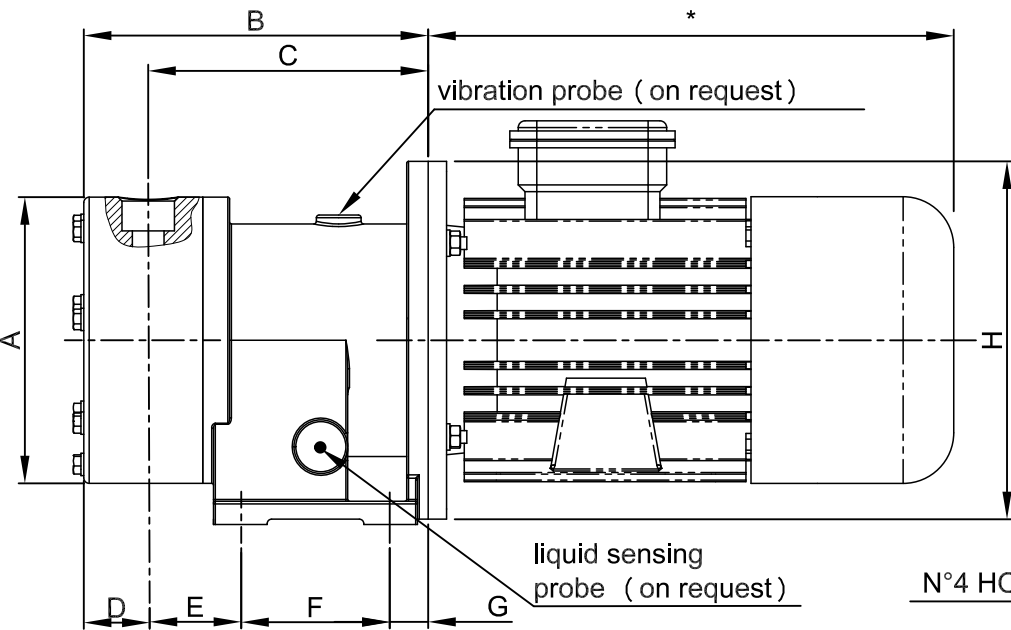

DIMENSIONS

A	B	C	D	E	F	G	H	I	L	M	N	P	
140	148	117	31	45	55	17.5	140	4.2	16	125	75	10	
- This drawing is for reference only - Pump may be supplied without motor - All dimensions are in millimeters - All T MAG-P pumps are reversibles	* Depend on the manufacturer												

Suction / Discharge Port

O

3/4" BSP-F/NPT-F

external magnet

MOTOR FLANGE



Pump model: T MAG-P32 PP/PVDF
ITEM:

Motor: IEC Gr63 B5
Port connection: Threaded

Standard: BSP-F UNI ISO 228/1 | NPT-F USAS B2-1/1968

OUTLINE DRAWING

CODE: D 10185 Rev.:00

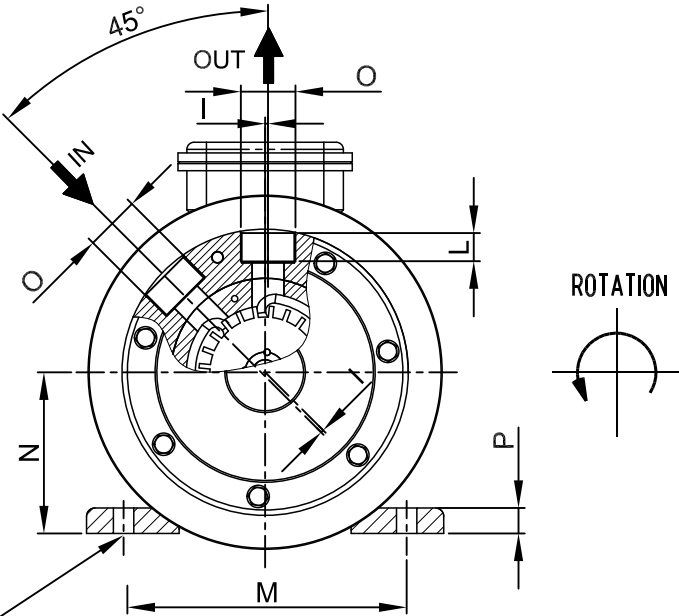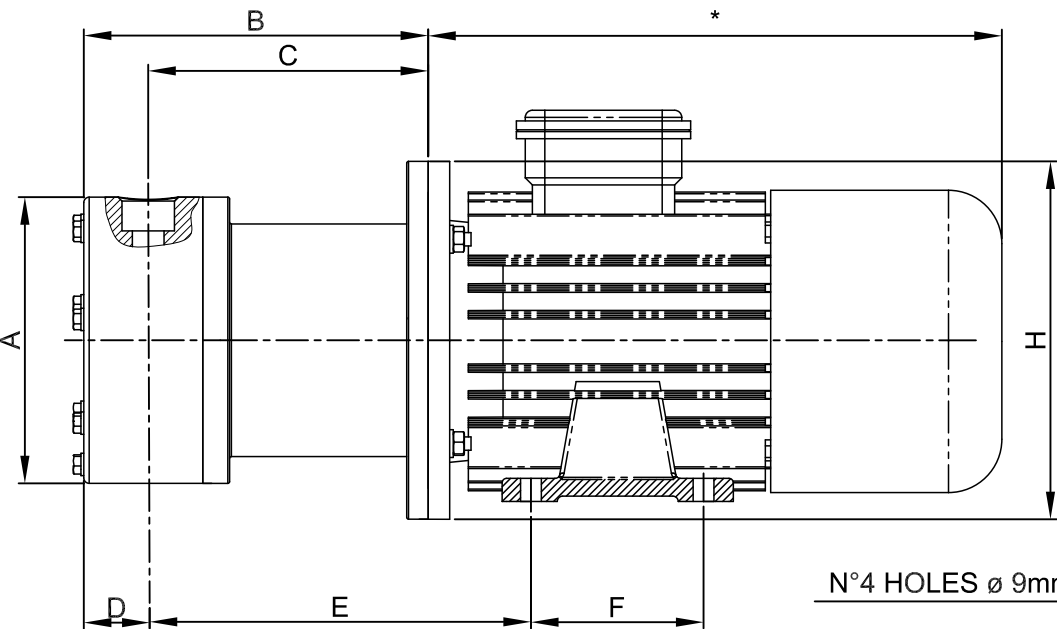

DIMENSIONS

A	B	C	D	E	F	H	I	L	M	N	P		
140	148	117	31	157	80	140	4.2	16	100	63	7		
- This drawing is for reference only - Pump may be supplied without motor - All dimensions are in millimeters - All T MAG-P pumps are reversibles	* Depend on the manufacturer												



Suction / Discharge Port	external magnet
O	
3/4" BSP-F/NPT-F	

Pump model: T MAG-P32 PP/PVDF
ITEM:
Version with plastic bracket

Motor: IEC Gr63 B3-B5
Port connection: Threaded
Standard: BSP-F UNI ISO 228/1 NPT-F USAS B2-1/1968

OUTLINE DRAWING

CODE: D 10034 Rev.:00

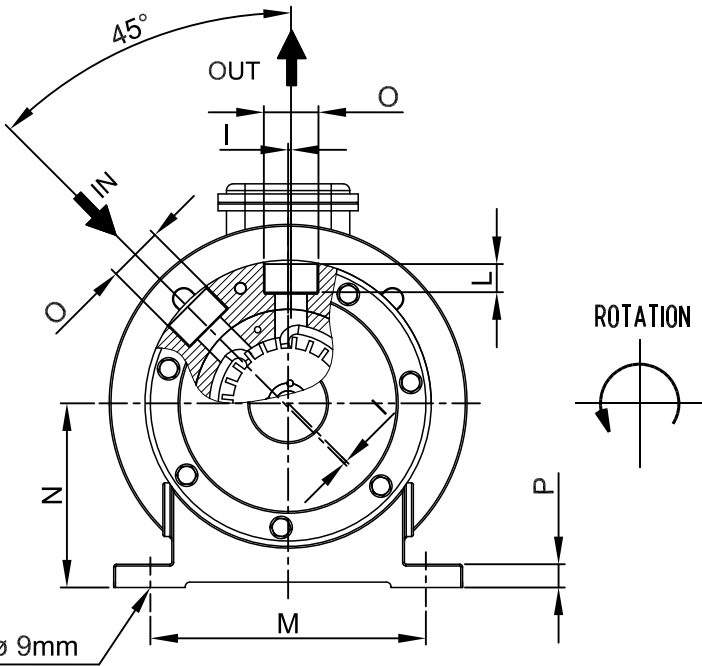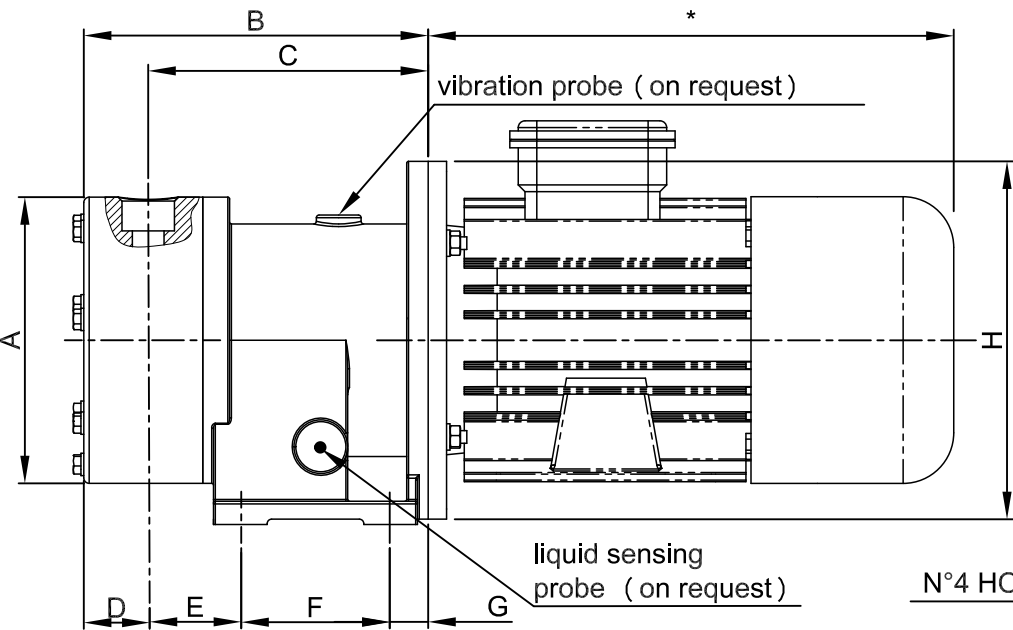

DIMENSIONS

A	B	C	D	E	F	G	H	I	L	M	N	P	
140	175	144	31	48	76	20	160	4.2	16	140	85	12	
- This drawing is for reference only - Pump may be supplied without motor - All dimensions are in millimeters - All T MAG-P pumps are reversibles	* Depend on the manufacturer												

Suction / Discharge Port	external magnet
O	
3/4" BSP-F/NPT-F	



Pump model: T MAG-P33 PP/PVDF
ITEM:

Motor: IEC Gr71 B5
Port connection: Threaded

Standard: BSP-F UNI ISO 228/1 | NPT-F USAS B2-1/1968

OUTLINE DRAWING

CODE: D 10186 Rev.:00

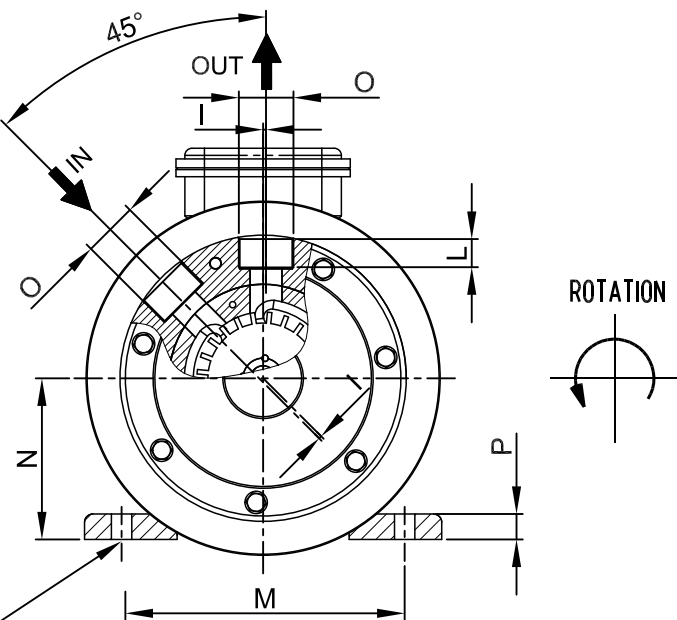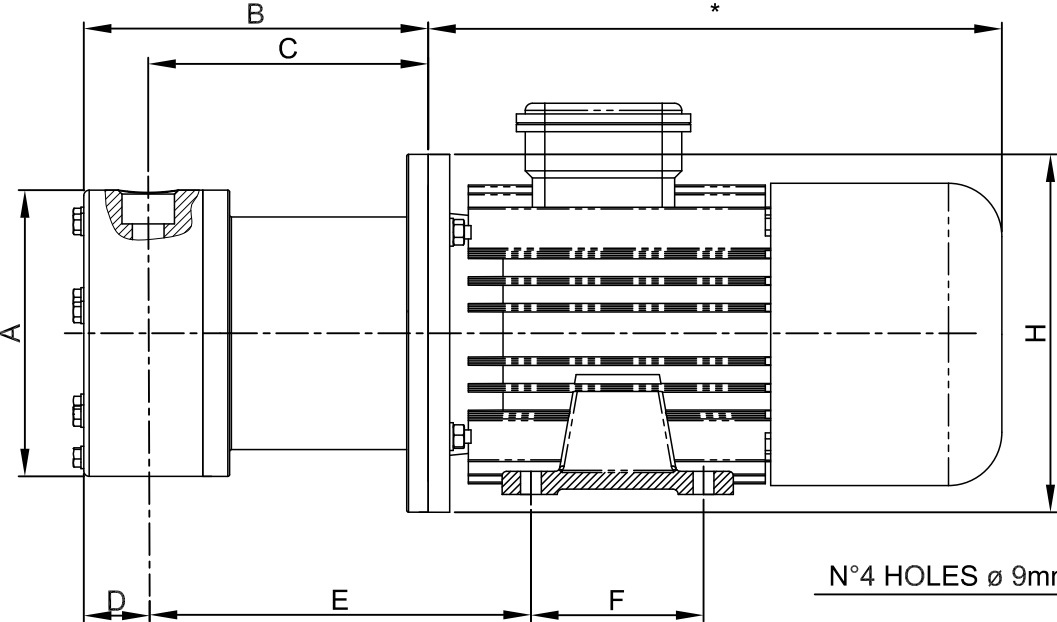

DIMENSIONS

A	B	C	D	E	F	H	I	L	M	N	P			
140	175	144	31	189	90	160	4.2	16	112	7	1	7		
- This drawing is for reference only									* Depend on the manufacturer					
- Pump may be supplied without motor														
- All dimensions are in millimeters														
- All T MAG-P pumps are reversibles														



Suction / Discharge Port	external magnet
O	
3/4" BSP-F/NPT-F	

Pump model: T MAG-P33 PP/PVDF
ITEM:
Version with plastic bracket

Motor: IEC Gr71 B3-B5
Port connection: Threaded
Standard: BSP-F UNI ISO 228/1 | NPT-F USAS B2-1/1968

OUTLINE DRAWING

CODE: D 10003 Rev.:00

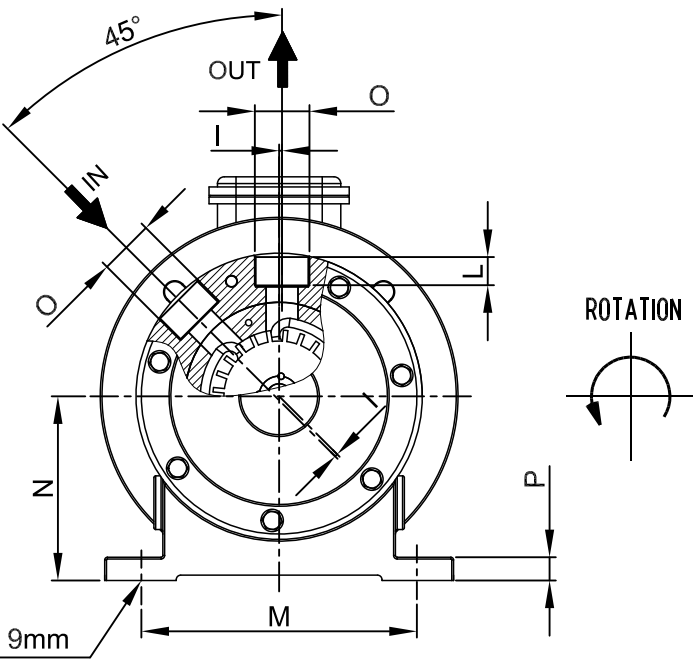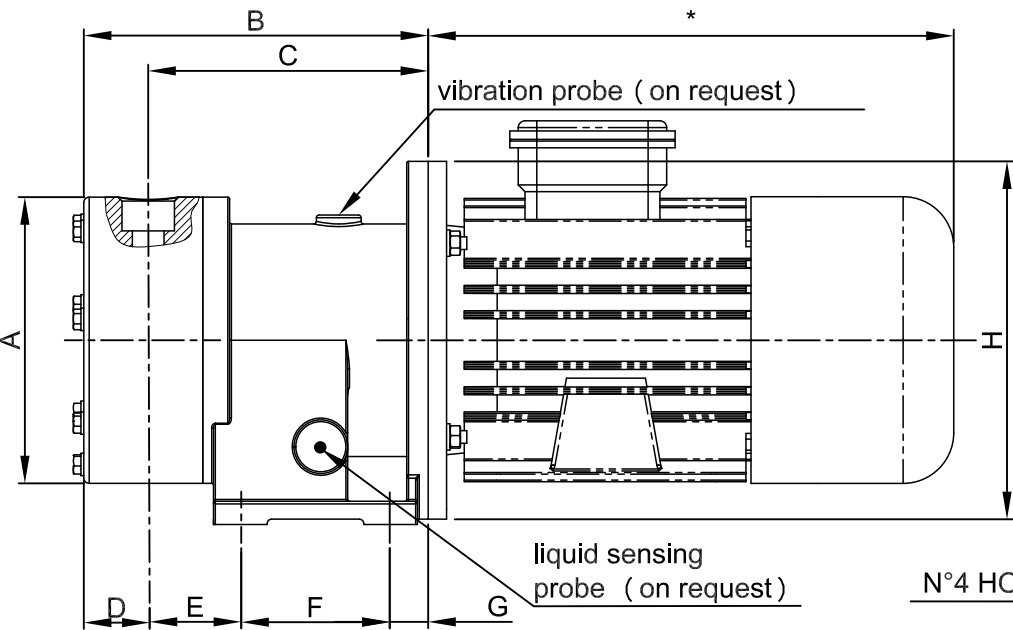

DIMENSIONS

A	B	C	D	E	F	G	H	I	L	M	N	P	
140	175	144	31	48	76	20	160	4.2	19	140	85	12	
- This drawing is for reference only - Pump may be supplied without motor - All dimensions are in millimeters - All T MAG-P pumps are reversibles									* Depend on the manufacturer				

Suction / Discharge Port	external magnet
O	
1" BSP-F/NPT-F	



Pump model: T MAG-P52 PP/PVDF
ITEM:

Motor: IEC Gr71 B5
Port connection: Threaded

Standard: BSP-F UNI ISO 228/1 | NPT-F USAS B2-1/1968

OUTLINE DRAWING

CODE: D 10187 Rev.:00

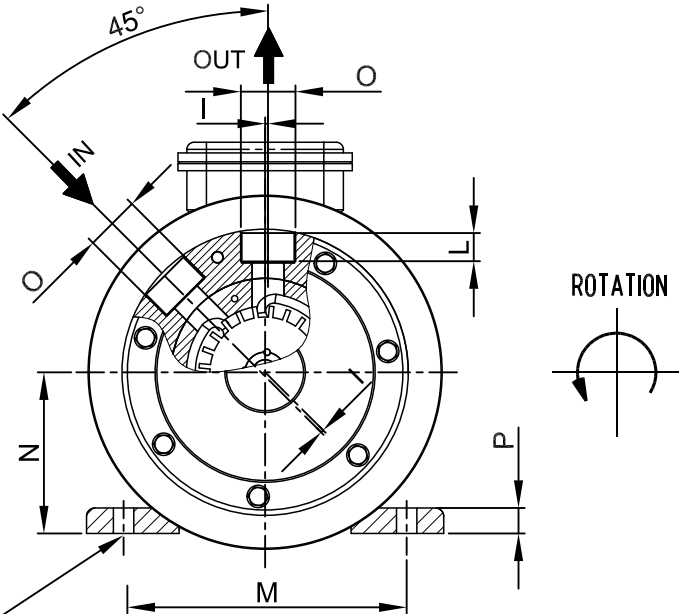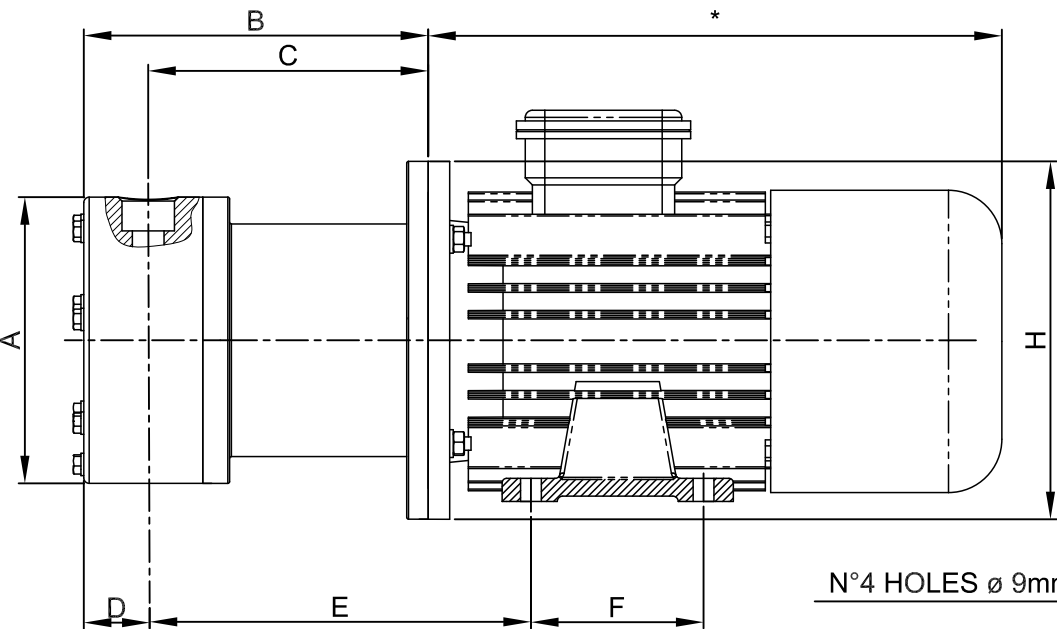

DIMENSIONS

A	B	C	D	E	F	H	I	L	M	N	P		
140	175	144	31	189	90	160	4.2	19	112	7	1	7	
- This drawing is for reference only - Pump may be supplied without motor - All dimensions are in millimeters - All T MAG-P pumps are reversibles	* Depend on the manufacturer												



Suction / Discharge Port	external magnet
O	
1" BSP-F/NPT-F	

Pump model: T MAG-P52 PP/PVDF
ITEM:
Version with plastic bracket

Motor: IEC Gr71 B3-B5
Port connection: Threaded
Standard: BSP-F UNI ISO 228/1 | NPT-F USAS B2-1/1968

OUTLINE DRAWING

CODE: D 10037 Rev.:00

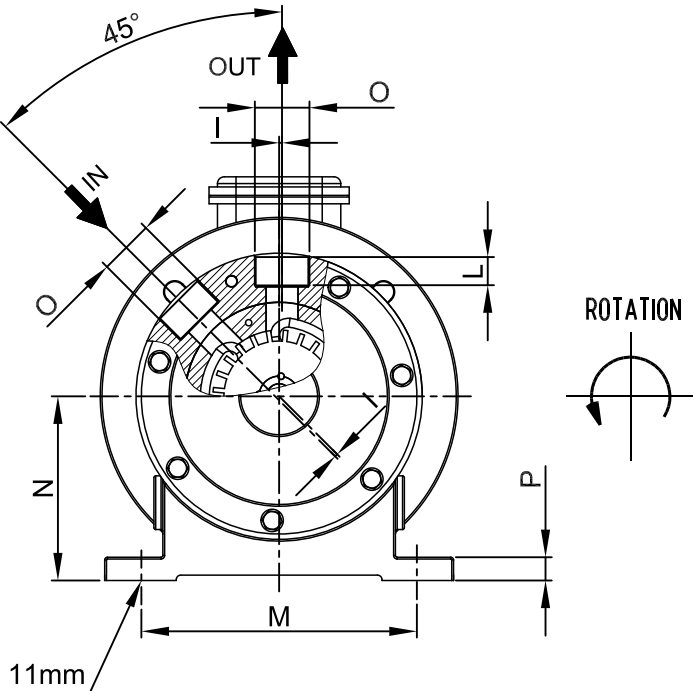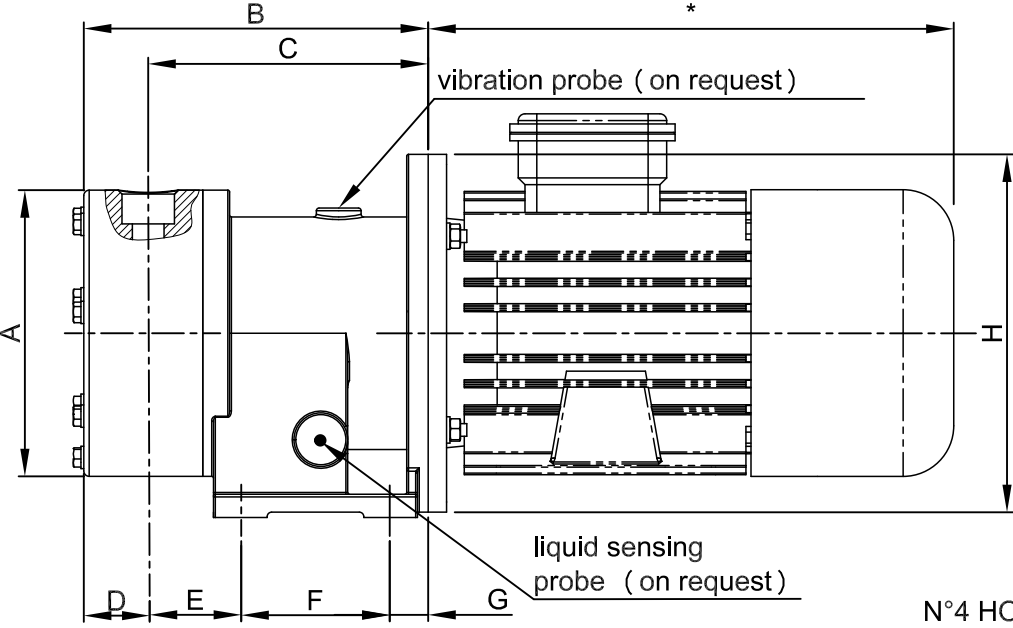

DIMENSIONS

A	B	C	D	E	F	G	H	I	L	M	N	P	
160	192.5	156.5	36	51.5	85	20	200	3.2	19	165	103	13	
- This drawing is for reference only									* Depend on the manufacturer				
- Pump may be supplied without motor													
- All dimensions are in millimeters													
- All T MAG-P pumps are reversibles													

Suction / Discharge Port	external magnet
O	
1" BSP-F/NPT-F	



ITEM: Pump model: T MAG-P53 PP/PVDF

Motor: IEC Gr80 B5
Port connection: Threaded

Standard: BSP-F UNI ISO 228/1 | NPT-F USAS B2-1/1968

OUTLINE DRAWING

CODE: D 10188 Rev.:00

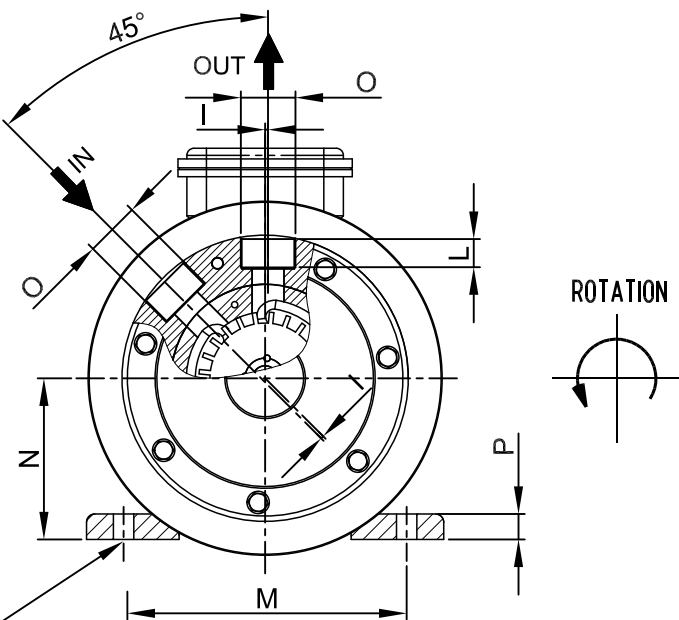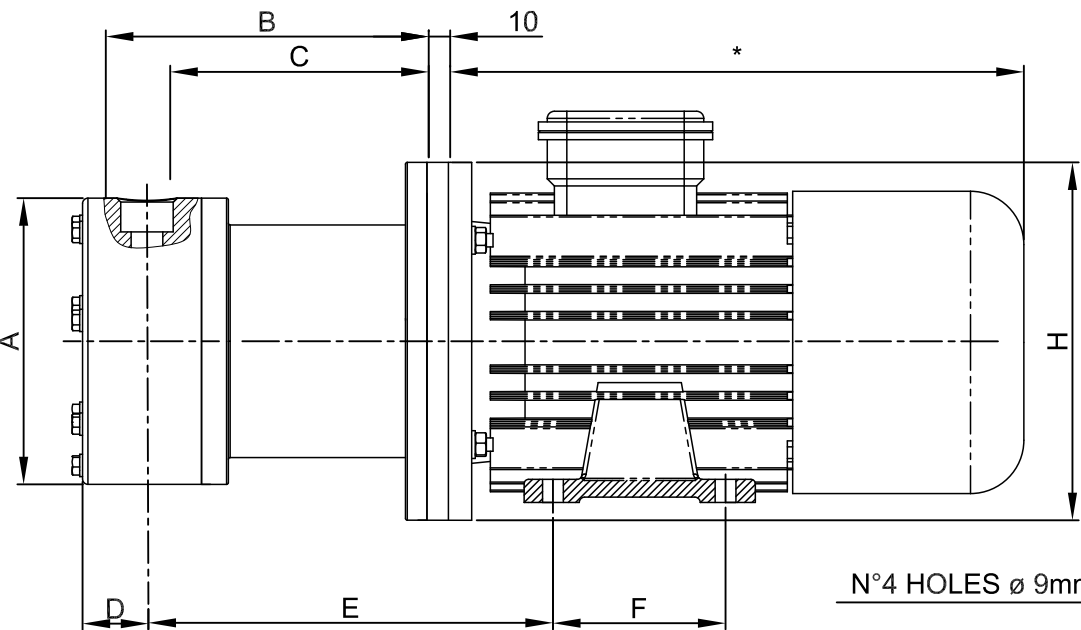

DIMENSIONS

A	B	C	D	E	F	H	I	L	M	N	P		
160	193	157	36	217	100	200	3.2	19	125	80	8		
- This drawing is for reference only - Pump may be supplied without motor - All dimensions are in millimeters - All T MAG-P pumps are reversibles	* Depend on the manufacturer												

Suction / Discharge Port	external magnet
O	
1" BSP-F/NPT-F	



Pump model: T MAG-P53 PP/PVDF
ITEM:
Version with plastic bracket

Motor: IEC Gr80 B3-B5
Port connection: Threaded
Standard: BSP-F UNI ISO 228/1 | NPT-F USAS B2-1/1968

adaptor flange code: 913103611

OUTLINE DRAWING

CODE: D 10006 Rev.:00

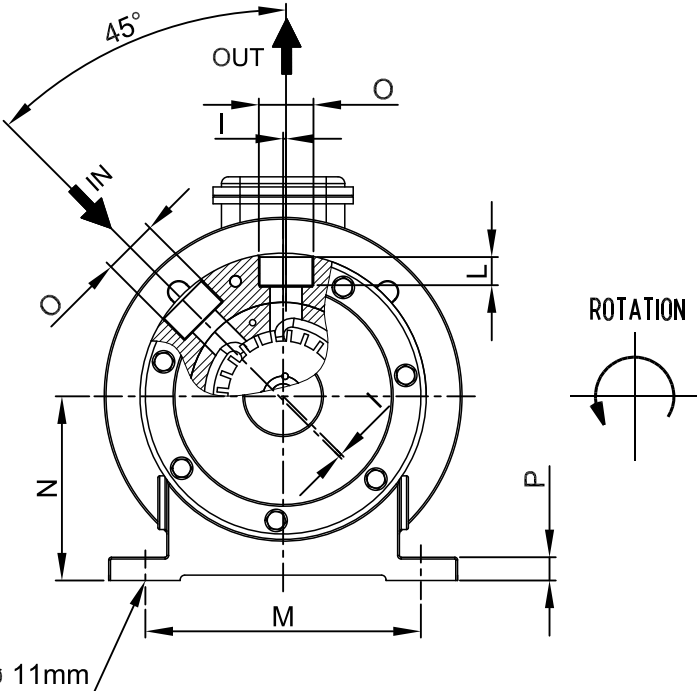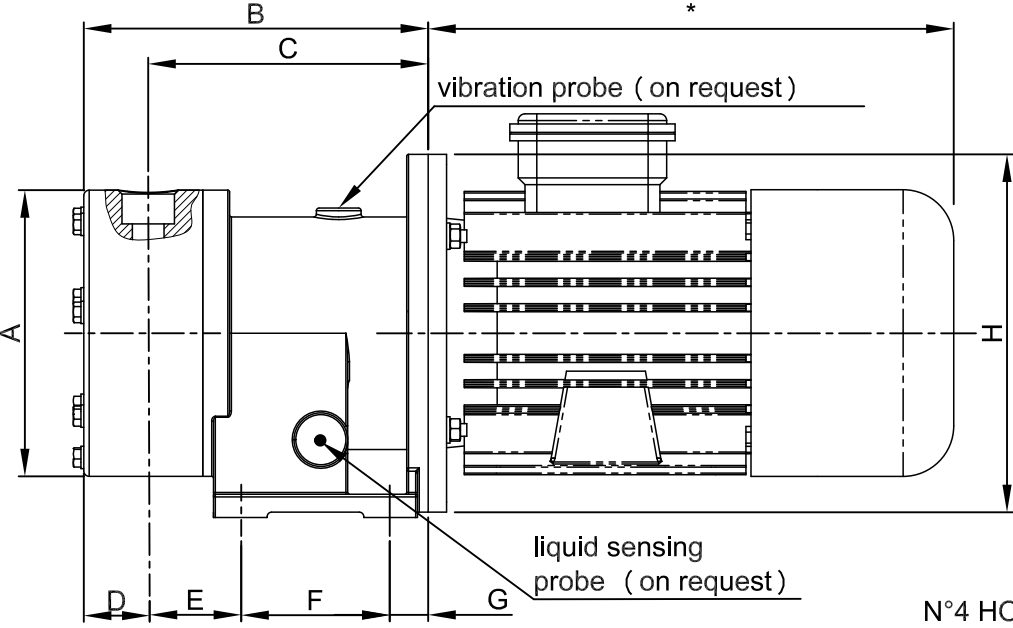

DIMENSIONS

A	B	C	D	E	F	G	H	I	L	M	N	P	
160	192.5	156.5	36	51.5	85	20	200	3.2	19	165	103	13	
- This drawing is for reference only - Pump may be supplied without motor - All dimensions are in millimeters - All T MAG-P pumps are reversibles									* Depend on the manufacturer				

Suction / Discharge Port	external magnet
O	
1" BSP-F/NPT-F	



Pump model: T MAG-P72 PP/PVDF
ITEM:

Motor: IEC Gr80 B5
Port connection: Threaded

Standard: BSP-F UNI ISO 228/1 | NPT-F USAS B2-1/1968

OUTLINE DRAWING

CODE: D 10189 Rev.:00

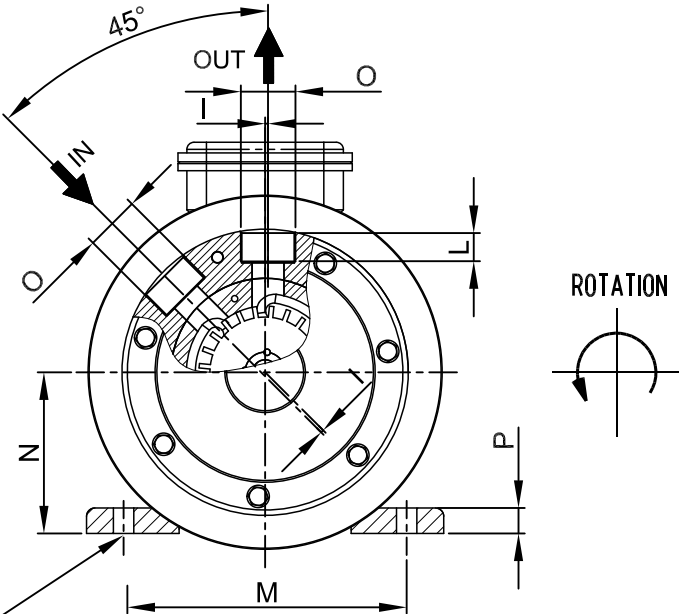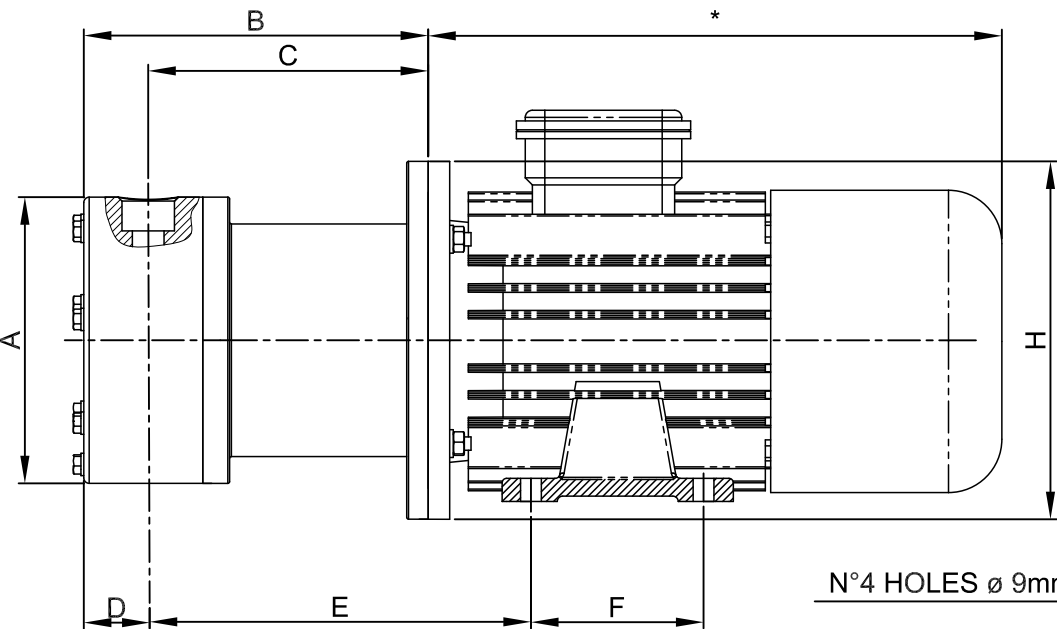

DIMENSIONS

A	B	C	D	E	F	H	I	L	M	N	P		
160	192.5	156.5	36.4	206	100	200	3.2	19	125	80	8		
- This drawing is for reference only - Pump may be supplied without motor - All dimensions are in millimeters - All T MAG-P pumps are reversibles									* Depend on the manufacturer				



Suction / Discharge Port	external magnet
O	
1" BSP-F/NPT-F	

Pump model: T MAG-P72 PP/PVDF
ITEM:
Version with plastic bracket

Motor: IEC Gr80 B3-B5
Port connection: Threaded
Standard: BSP-F UNI ISO 228/1 | NPT-F USAS B2-1/1968

OUTLINE DRAWING

CODE: D 10019 Rev.:00

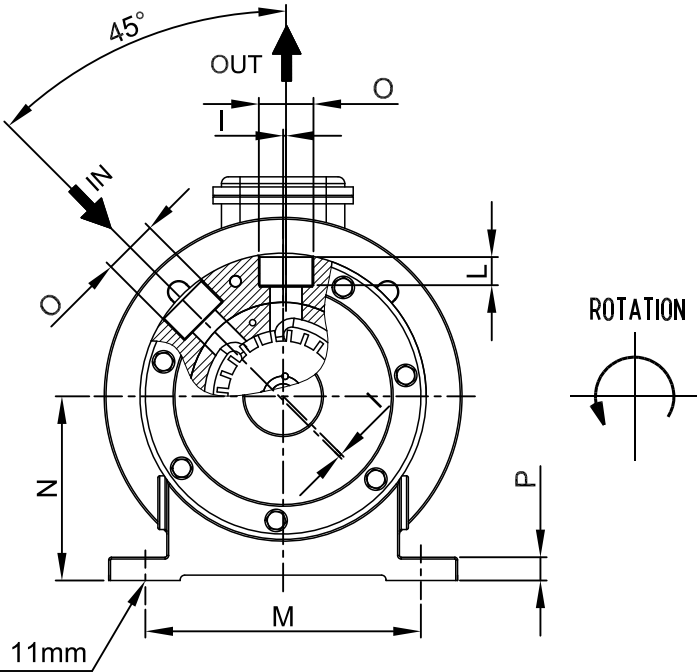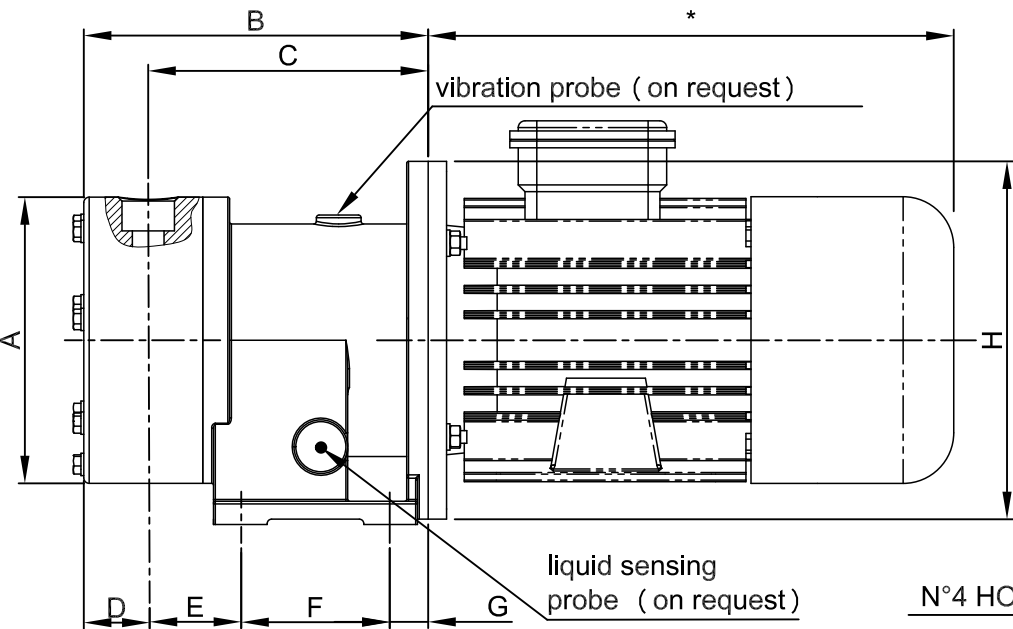

DIMENSIONS

A	B	C	D	E	F	G	H	I	L	M	N	P	
190	231	191	40	64	106	21	200	4.5	20	180	105	13	
- This drawing is for reference only - Pump may be supplied without motor - All dimensions are in millimeters - All T MAG-P pumps are reversibles	* Depend on the manufacturer												

Suction / Discharge Port	external magnet
○	
1" BSP-F/NPT-F	



Pump model: T MAG-P73 PP/PVDF
ITEM:

Motor: IEC Gr90 B5
Port connection: Threaded

Standard: BSP-F UNI ISO 228/1 | NPT-F USAS B2-1/1968

OUTLINE DRAWING

CODE: D 10347 Rev.:00

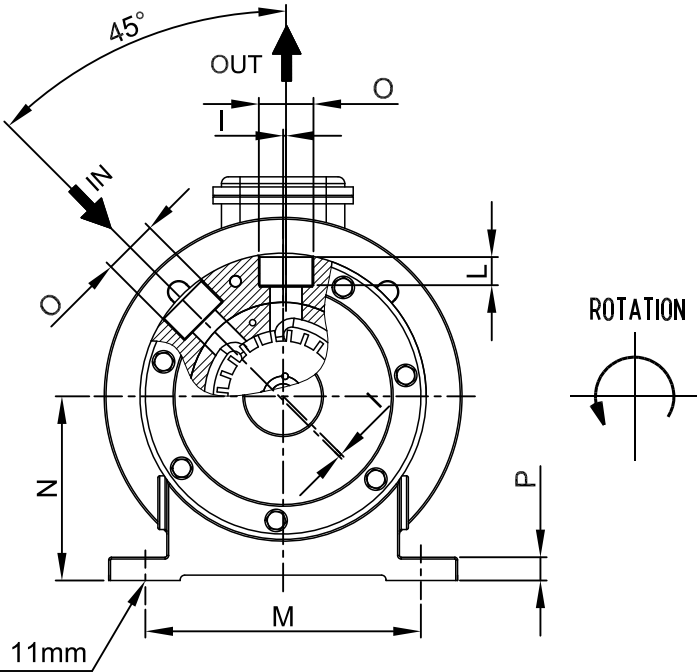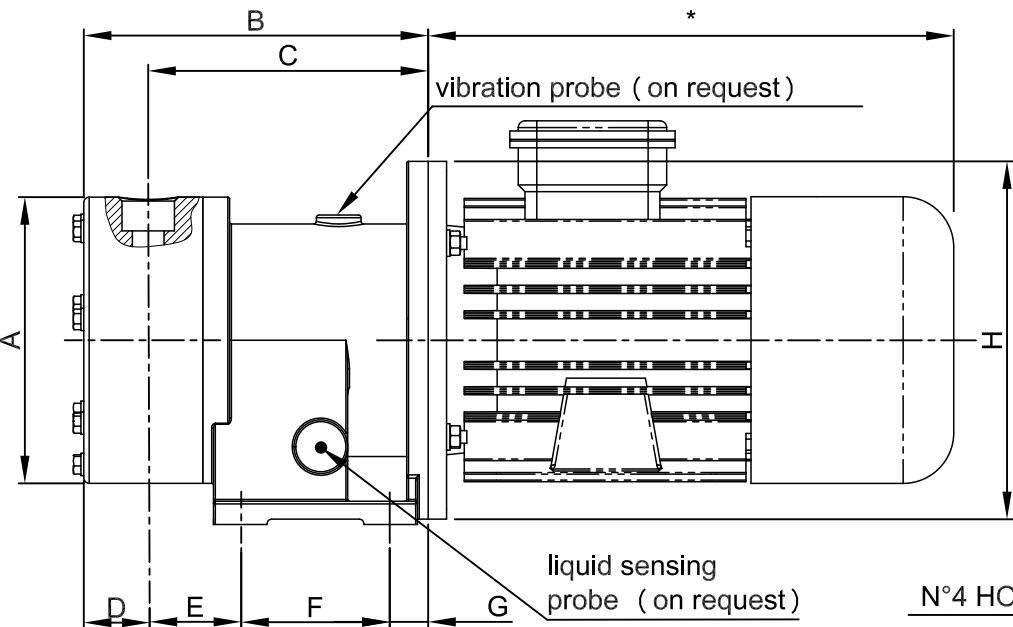

DIMENSIONS

A	B	C	D	E	F	G	H	I	L	M	N	P	
190	241	201	40	60	120	21	250	4.5	20	180	135	15	
- This drawing is for reference only									* Depend on the manufacturer				
- Pump may be supplied without motor													
- All dimensions are in millimeters													
- All T MAG-P pumps are reversibles													

Suction / Discharge Port	external magnet
O	
1" BSP-F/NPT-F	



Pump model: T MAG-P73 PP/PVDF
ITEM:

Motor: IEC Gr100/112 B5
Port connection: Threaded

Standard: BSP-F UNI ISO 228/1 | NPT-F USAS B2-1/1968

OUTLINE DRAWING

CODE: D 10025 Rev.:00

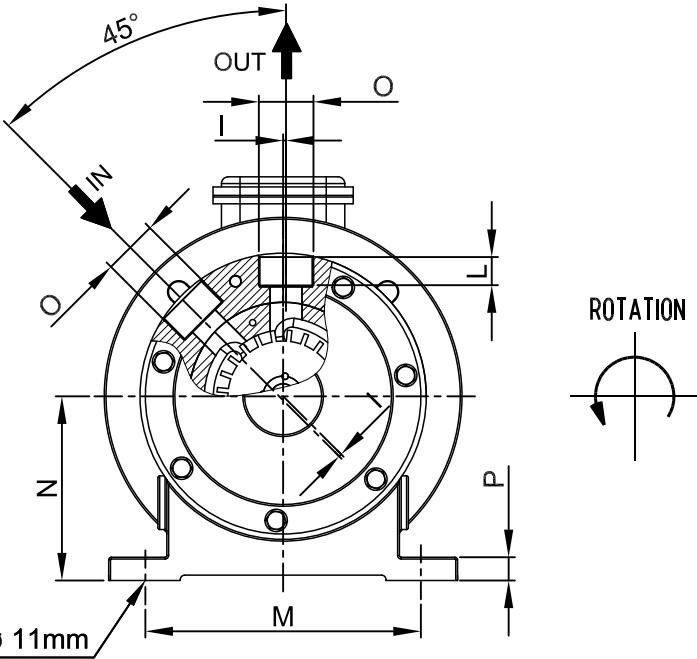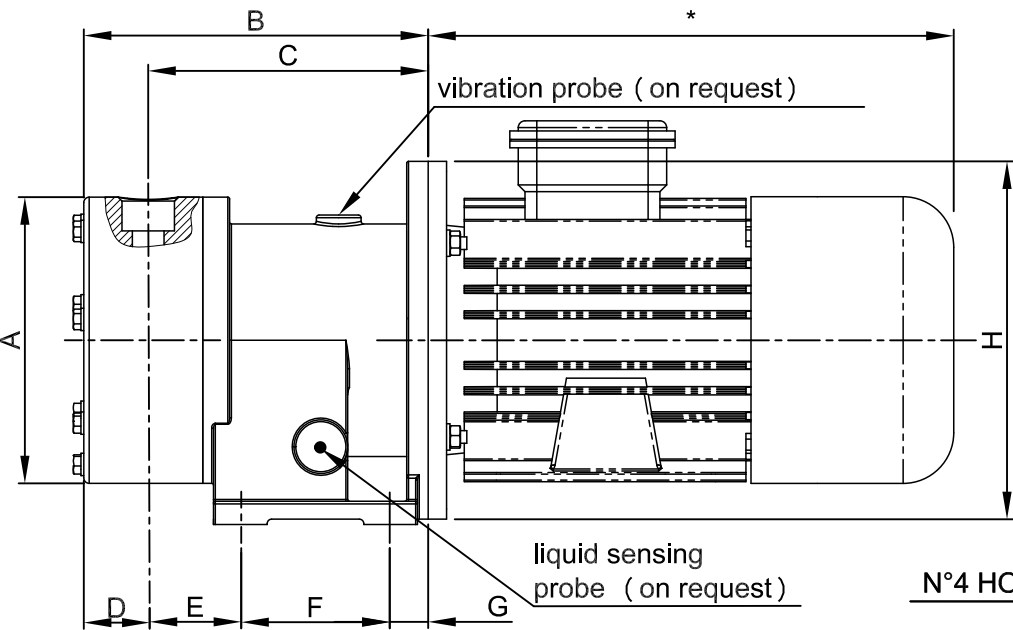

DIMENSIONS

A	B	C	D	E	F	G	H	I	L	M	N	P	
190	231	191	40	64	106	21	200	4.5	20	180	105	13	
- This drawing is for reference only - Pump may be supplied without motor - All dimensions are in millimeters - All T MAG-P pumps are reversibles	* Depend on the manufacturer												



Suction / Discharge Port	external magnet
O	
1" BSP-F/NPT-F	

ITEM: Pump model: T MAG-P92 PP/PVDF

Motor: IEC Gr90 B5
Port connection: Threaded
Standard: BSP-F UNI ISO 228/1 | NPT-F USAS B2-1/1968


OUTLINE DRAWING

CODE: D 10040 Rev.:00

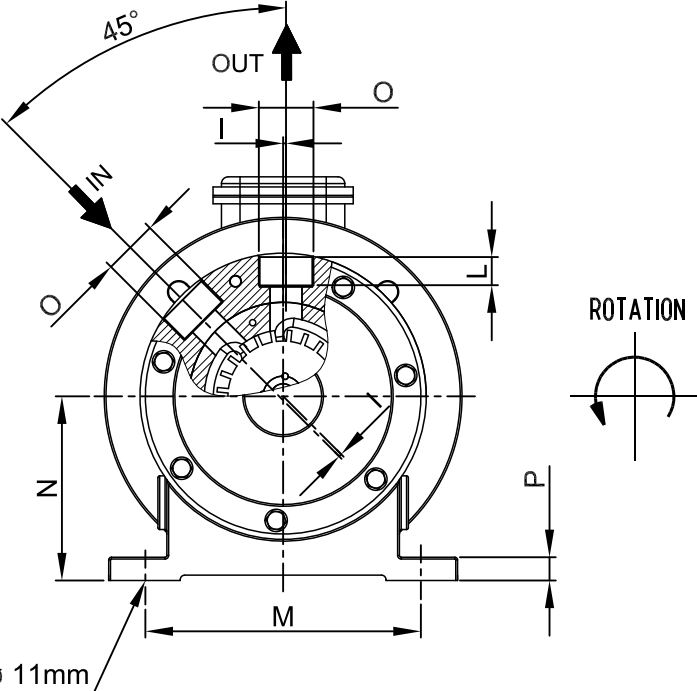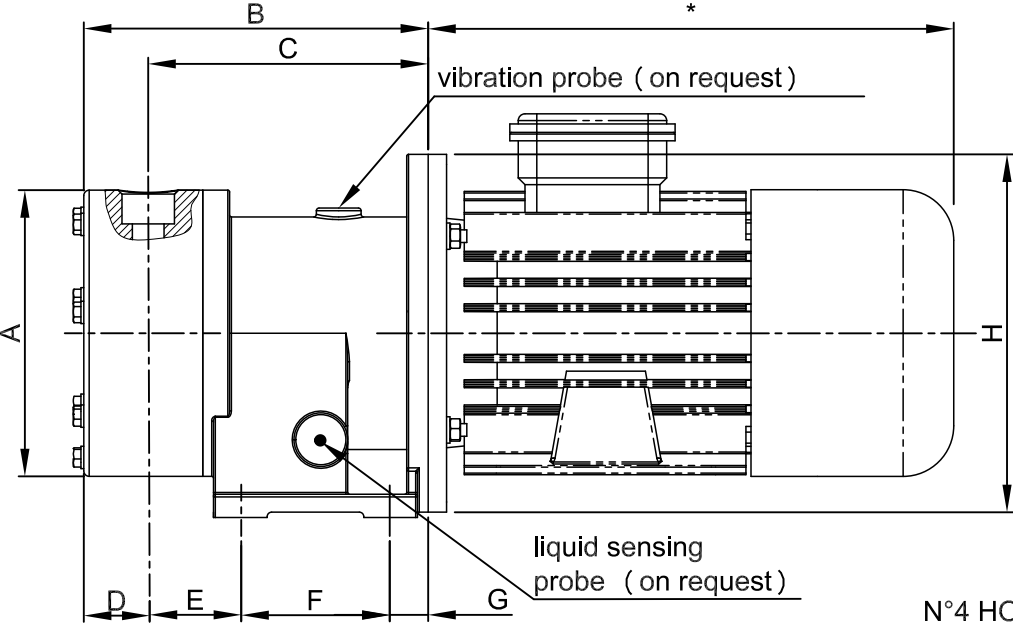

DIMENSIONS

A	B	C	D	E	F	G	H	I	L	M	N	P	
190	241	201	40	60	120	21	250	4.5	20	180	135	15	
- This drawing is for reference only									* Depend on the manufacturer				
- Pump may be supplied without motor													
- All dimensions are in millimeters													
- All T MAG-P pumps are reversibles													

Suction / Discharge Port	external magnet
O	
1" BSP-F/NPT-F	



Pump model: T MAG-P93 PP/PVDF
ITEM:

Motor: IEC Gr100/112 B5
Port connection: Threaded

Standard: BSP-F UNI ISO 228/1 | NPT-F USAS B2-1/1968


OUTLINE DRAWING

CODE: D 10043 Rev.:00

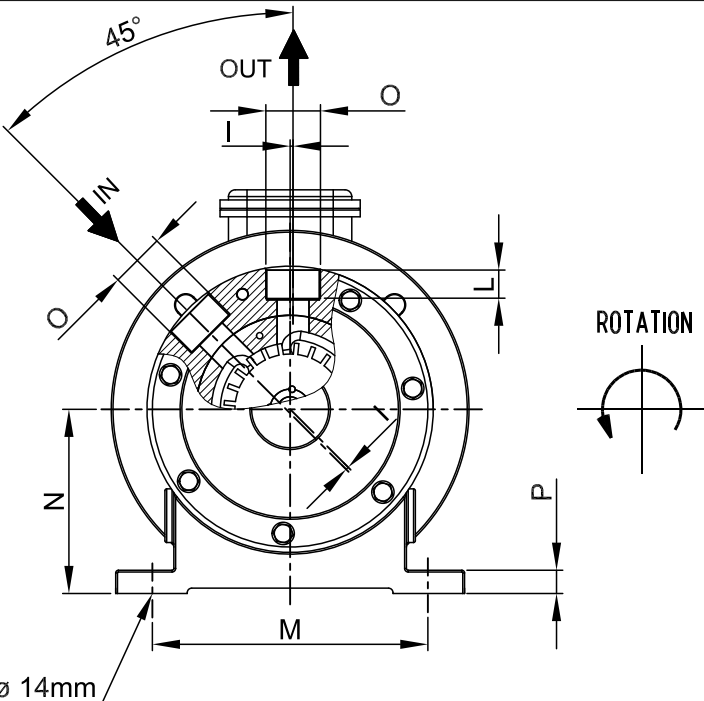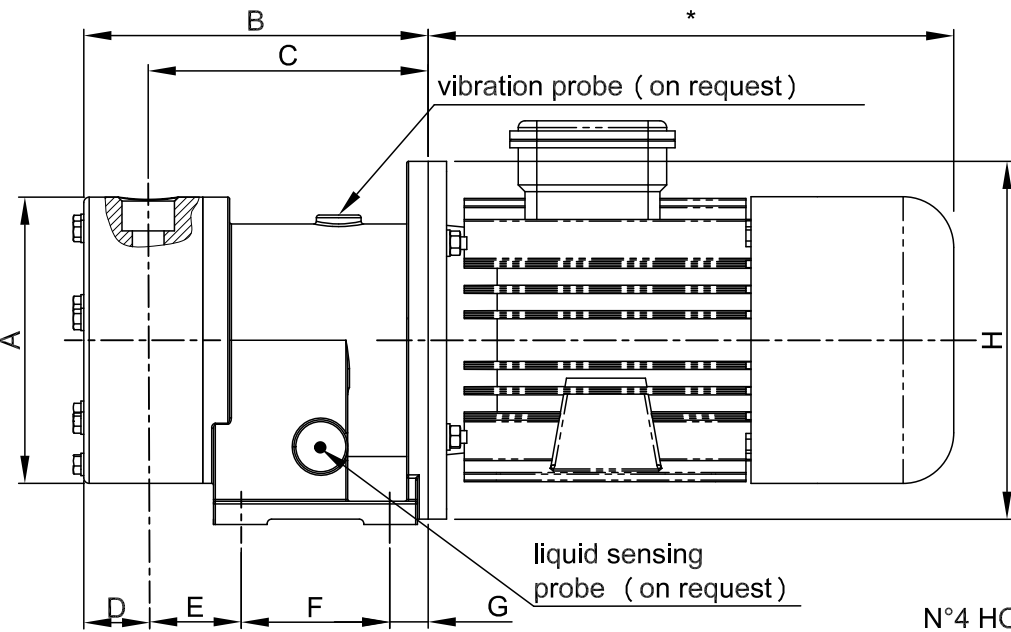

DIMENSIONS

A	B	C	D	E	F	G	H	I	L	M	N	P	
225	266.5	223	43.5	85.5	100	37.5	250	7	23	210	135	15	
- This drawing is for reference only - Pump may be supplied without motor - All dimensions are in millimeters - All T MAG-P pumps are reversibles	* Depend on the manufacturer												



Suction / Discharge Port	external magnet
O	
1"1/4 BSP-F/NPT-F	

ITEM: Pump model: T MAG-P122 PP/PVDF

Motor: IEC Gr100/112 B5
Port connection: Threaded
Standard: BSP-F UNI ISO 228/1 | NPT-F USAS B2-1/1968

OUTLINE DRAWING

CODE: D 10045 Rev.:00

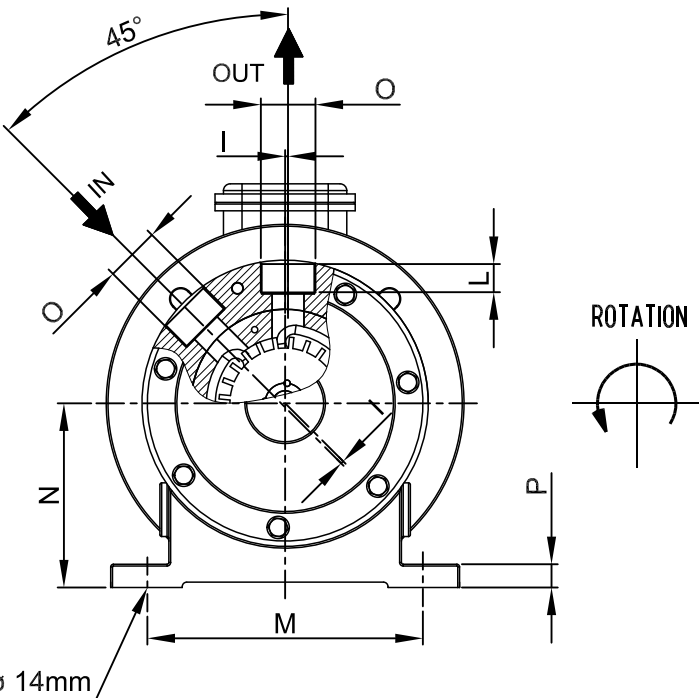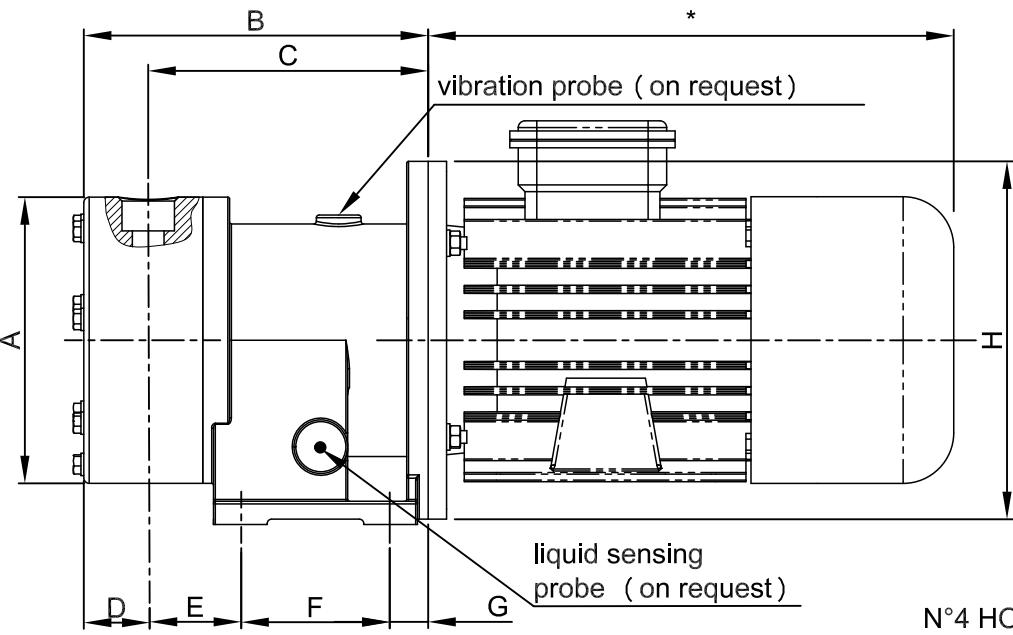

DIMENSIONS

A	B	C	D	E	F	G	H	I	L	M	N	P	
225	286.5	243	43.5	85.5	120	37.5	300	7	23	210	153	15	
- This drawing is for reference only - Pump may be supplied without motor - All dimensions are in millimeters - All T MAG-P pumps are reversibles	* Depend on the manufacturer												

Suction / Discharge Port	external magnet
O	
1"1/4 BSP-F/NPT-F	



Pump model: T MAG-P123 PP/PVDF
ITEM:

Motor: IEC Gr132 B5
Port connection: Threaded

Standard: BSP-F UNI ISO 228/1 | NPT-F USAS B2-1/1968


OUTLINE DRAWING

CODE: D 10051 Rev.:00

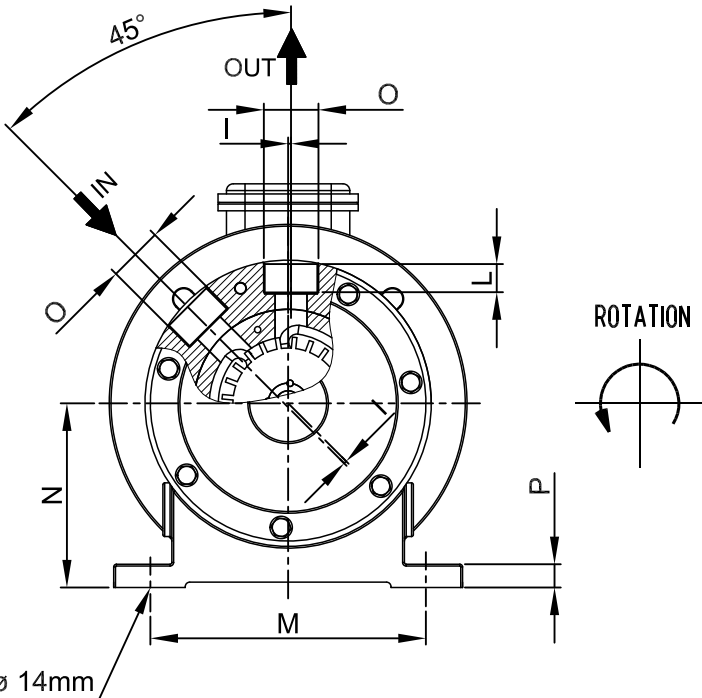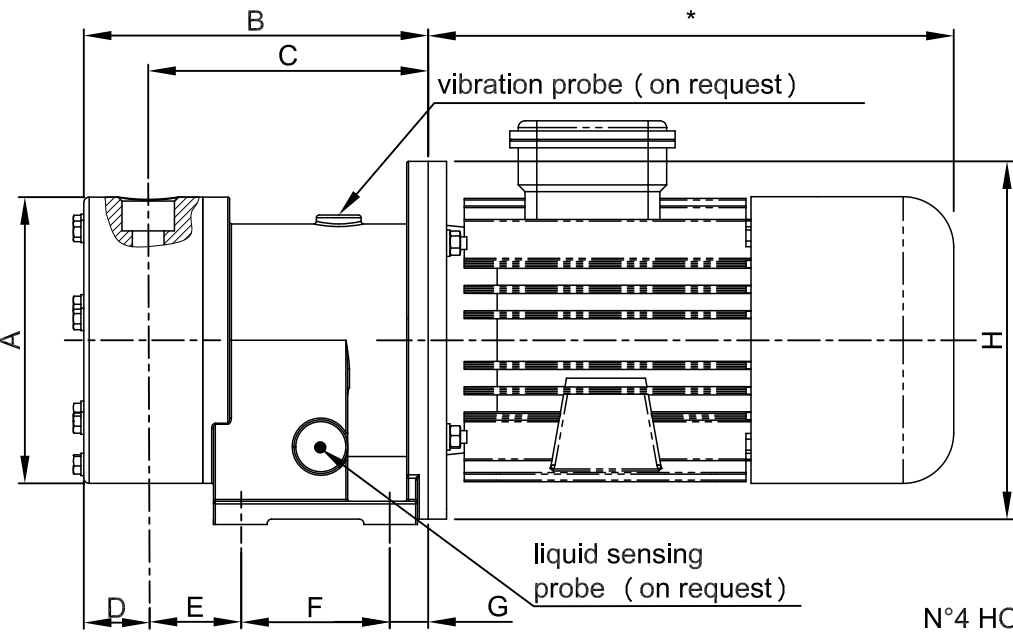

DIMENSIONS

A	B	C	D	E	F	G	H	I	L	M	N	P	
250	288	245	43.5	87.5	120	37.5	300	7	23	210	153	15	
- This drawing is for reference only - Pump may be supplied without motor - All dimensions are in millimeters - All T MAG-P pumps are reversibles	* Depend on the manufacturer												

Suction / Discharge Port	external magnet
O	
1"1/4 BSP-F/NPT-F	

Pump model: T MAG-P160 PP/PVDF
ITEM:

Motor: IEC Gr132 B5
Port connection: Threaded

Standard: BSP-F UNI ISO 228/1 | NPT-F USAS B2-1/1968