


OUTLINE DRAWING


CODE: D 10483 Rev.:00

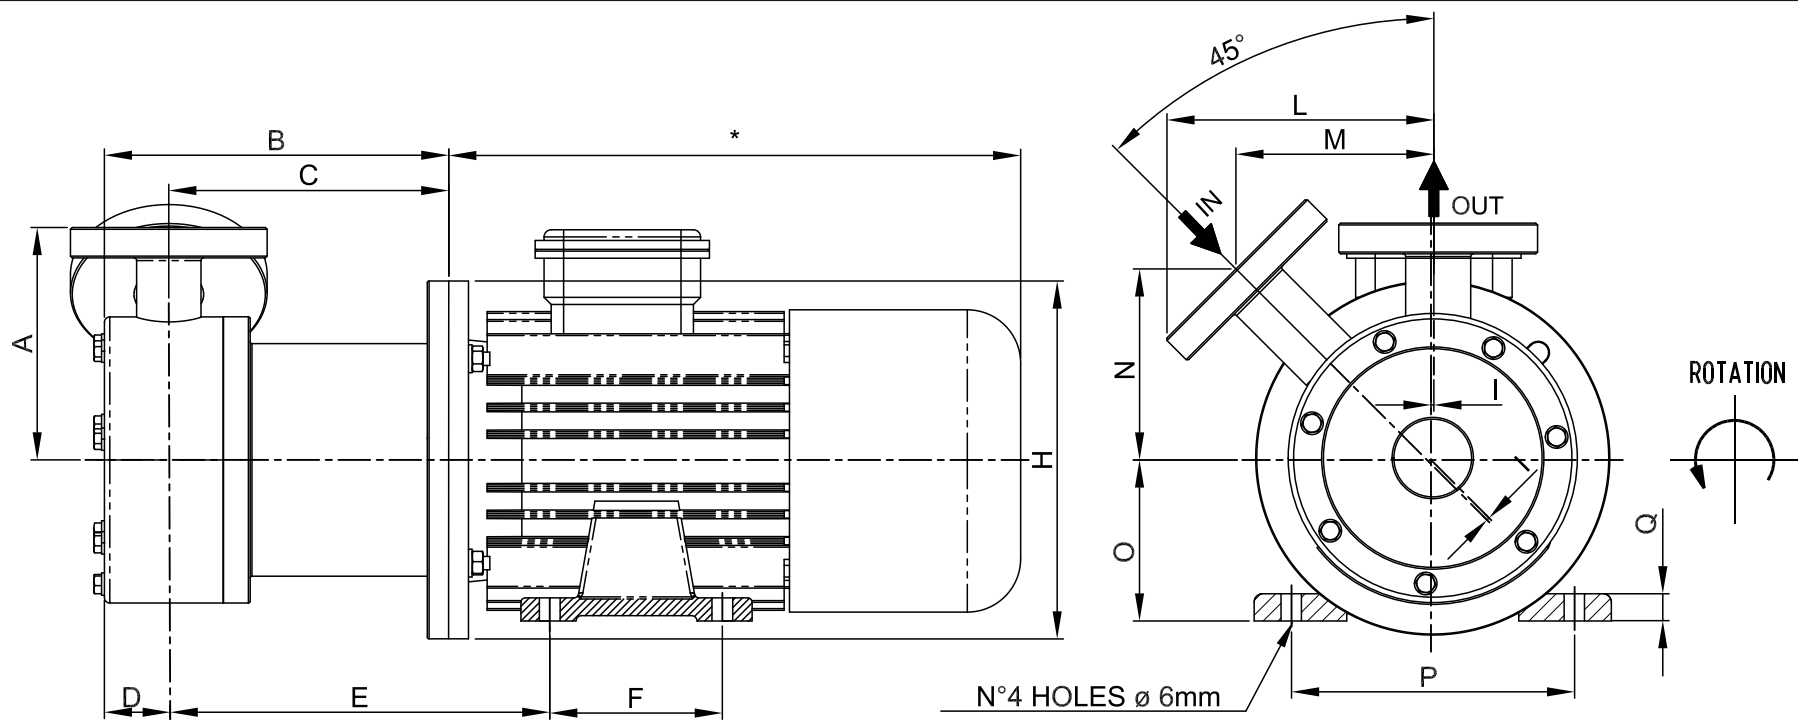

DIMENSIONS

A	B	C	D	E	F	H	I	L	M	N	O	P	Q
95	130	99	31	135	71	120	4.2	118	87	77	56	90	6

- This drawing is for reference only
 - Pump may be supplied without motor
 - All dimensions are in millimeters
 - All T MAG-P pumps are reversibles
- * Depend on the manufacturer

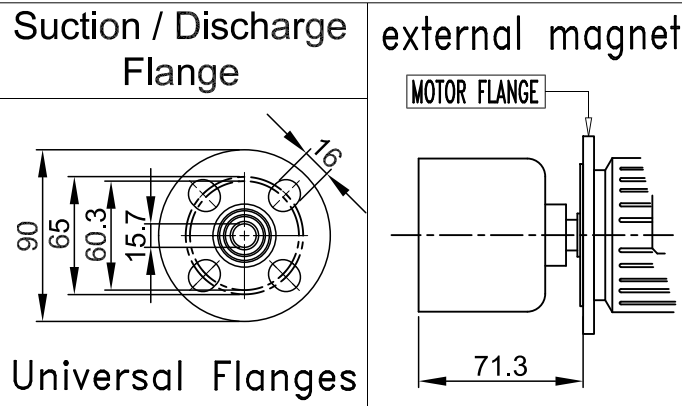


Pump model: T MAG-P22 PP/PVDF
ITEM:
Version with plastic bracket

Motor: IEC Gr56 B3-B5
Port connection: Flanges according to
DN 2501 PN10 / ANSI B 16.5 150 lb

OUTLINE DRAWING

CODE: D 10452 Rev.:00

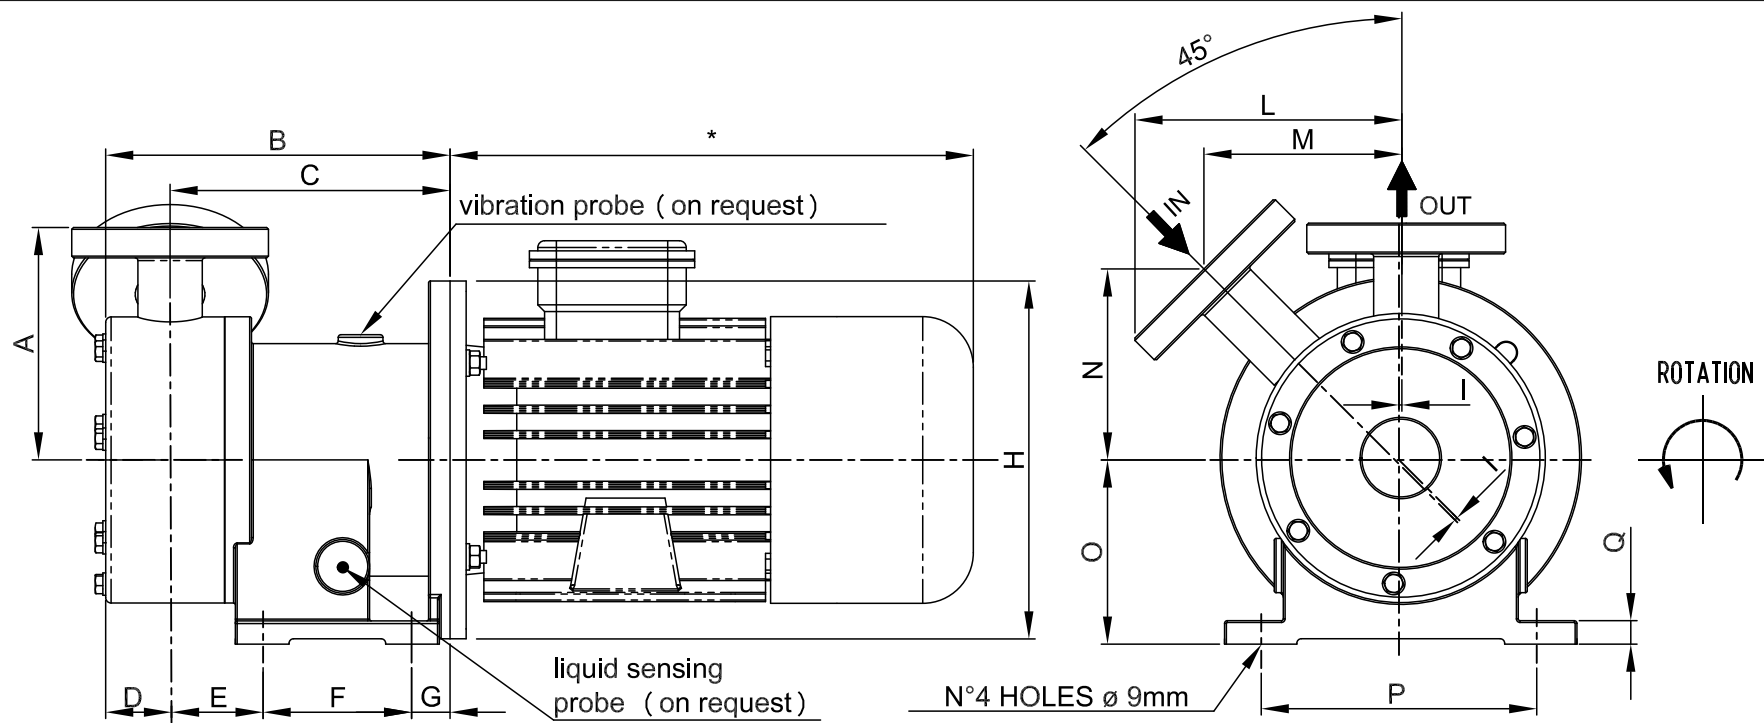


Pump model: T MAG-P23 PP/PVDF
ITEM:

DIMENSIONS

A	B	C	D	E	F	G	H	I	L	M	N	O	P	Q
105	148	117	31	44.5	55	17.5	140	42	124	94	84	75	125	10


- This drawing is for reference only
 - Pump may be supplied without motor
 - All dimensions are in millimeters
 - All T MAG-P pumps are reversibles
- * Depend on the manufacturer

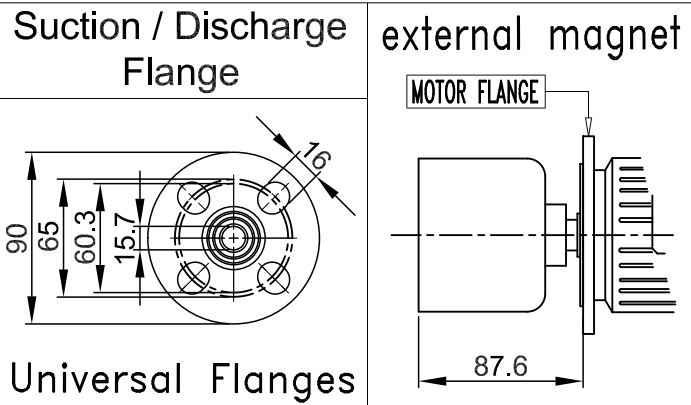

Motor: IEC Gr63 B5
Port connection: Flanges according to
DIN 2501 PN10 / ANSI B 16.5 150 lb

OUTLINE DRAWING

CODE: D 10480 Rev.:00

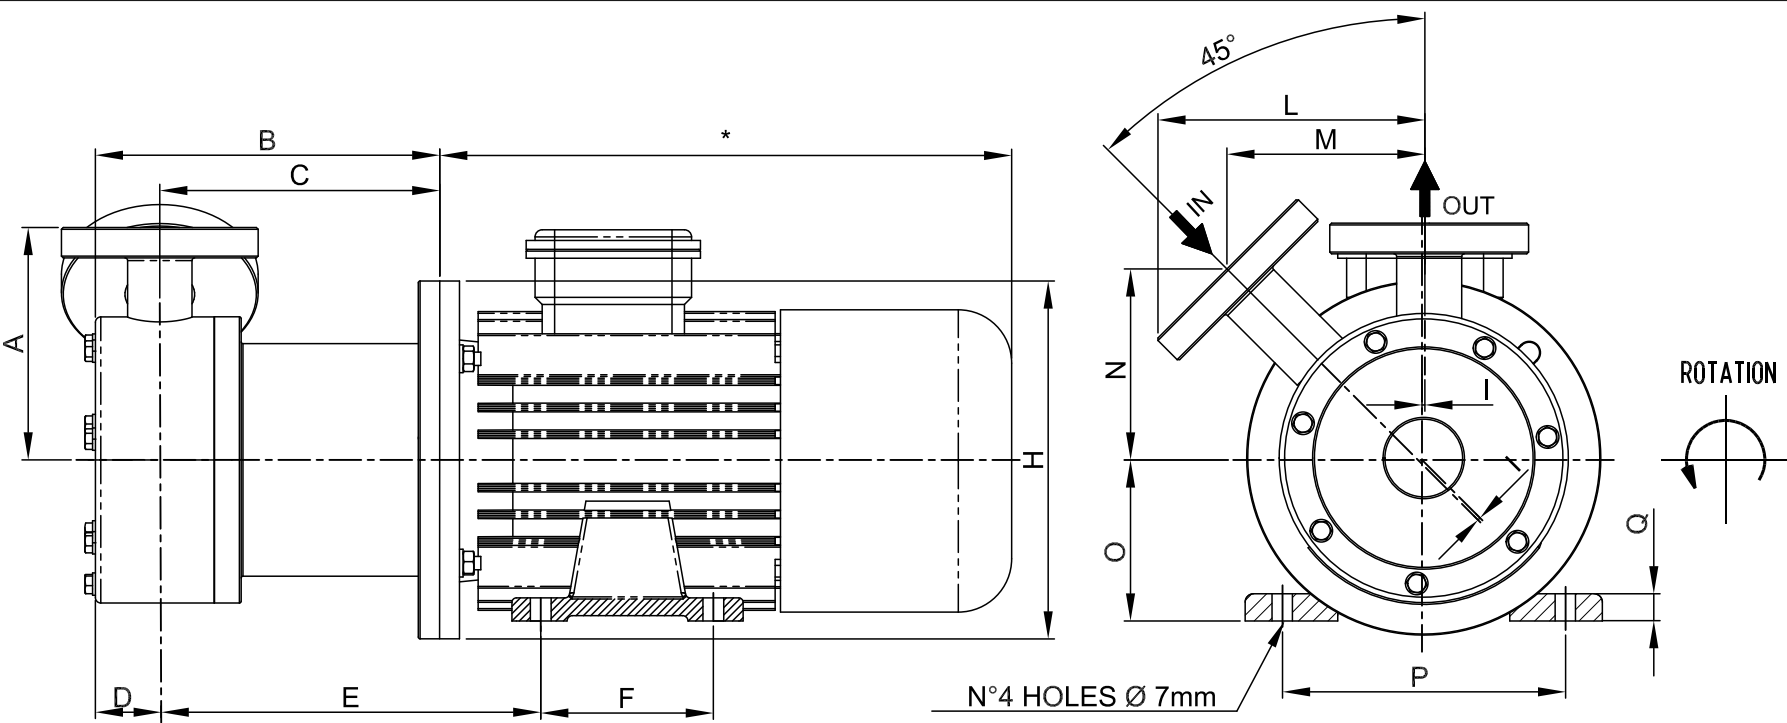

Pump model: T MAG-P23 PP/PVDF
ITEM:
Version with plastic bracket


DIMENSIONS

A	B	C	D	E	F	H	I	L	M	N	O	P	Q
105	148	117	31	157	80	140	4.2	124	94	84	63	100	10

- This drawing is for reference only
- Pump may be supplied without motor
- All dimensions are in millimeters
- All T MAG-P pumps are reversibles


* Depend on the manufacturer

Suction / Discharge Flange



Universal Flanges


external magnet



Motor: IEC Gr63 B3-B5
Port connection: Flanges according to
DIN 2501 PN10 / ANSI B 16.5 150 lb

OUTLINE DRAWING

CODE: D 10453 Rev.:00

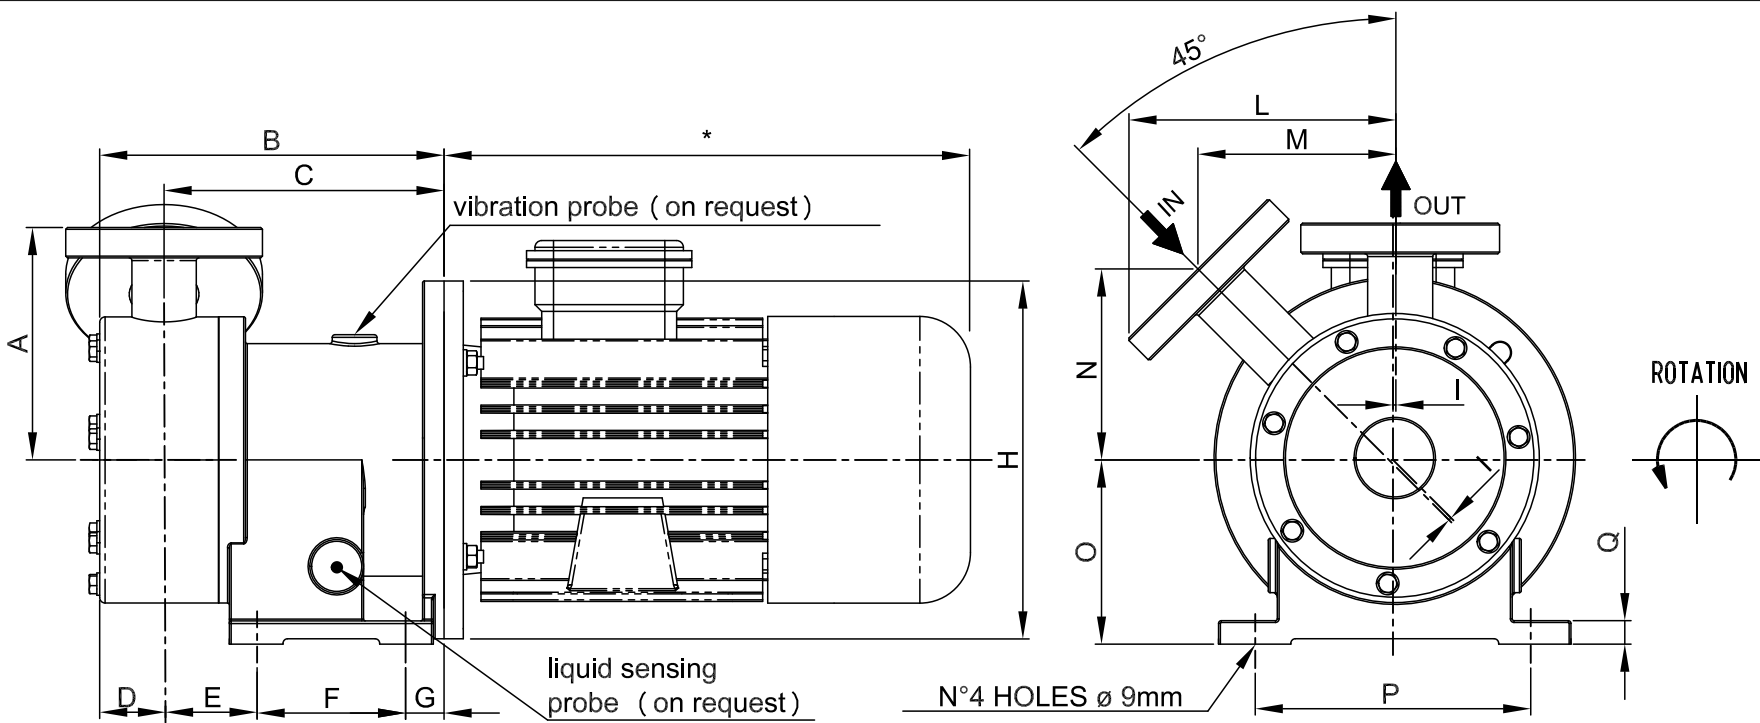


DIMENSIONS

A	B	C	D	E	F	G	H	I	L	M	N	O	P	Q
111	148	117	31	45	55	17.5	140	4.2	134	100	90	75	125	10

- This drawing is for reference only
- Pump may be supplied without motor
- All dimensions are in millimeters
- All T MAG-P pumps are reversibles

* Depend on the manufacturer

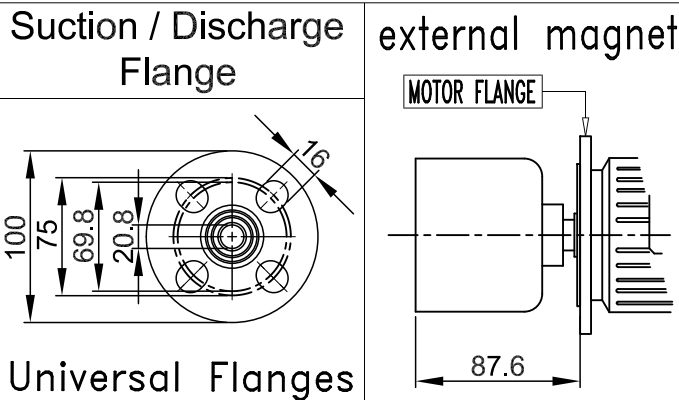


ITEM: Pump model: T MAG-P32 PP/PVDF

Motor: IEC Gr63 B5

Port connection: Flanges according to DIN 2501 PN10 / ANSI B 16.5 150 lb

OUTLINE DRAWING

CODE: D 10481 Rev.:00

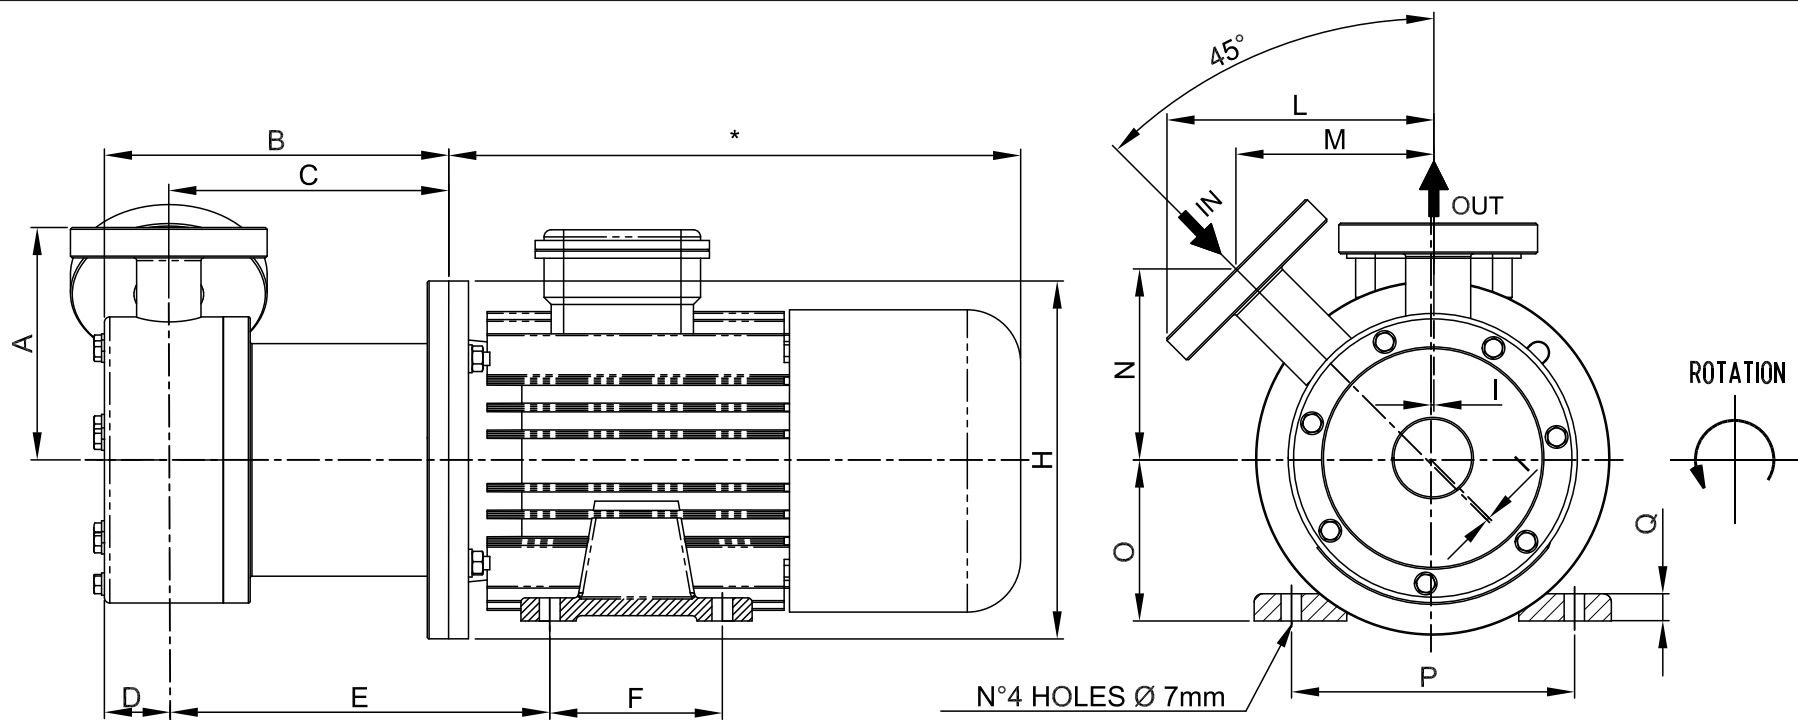


Pump model: T MAG-P32 PP/PVDF
ITEM:
Version with plastic bracket

DIMENSIONS

A	B	C	D	E	F	H	I	L	M	N	O	P	Q
111	148	117	31	157	80	140	4.2	134	100	90	63	100	7


- This drawing is for reference only
 - Pump may be supplied without motor
 - All dimensions are in millimeters
 - All T MAG-P pumps are reversibles
- * Depend on the manufacturer

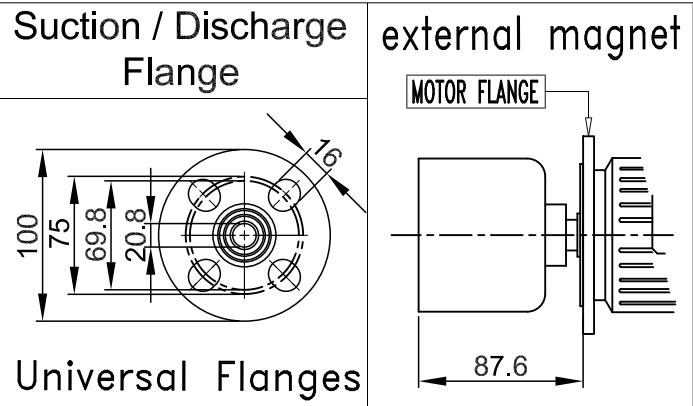

Motor: IEC Gr63 B3-B5
Port connection: Flanges according to
DIN 2501 PN10 / ANSI B 16.5 150 lb

OUTLINE DRAWING

CODE: D 10454 Rev.:00

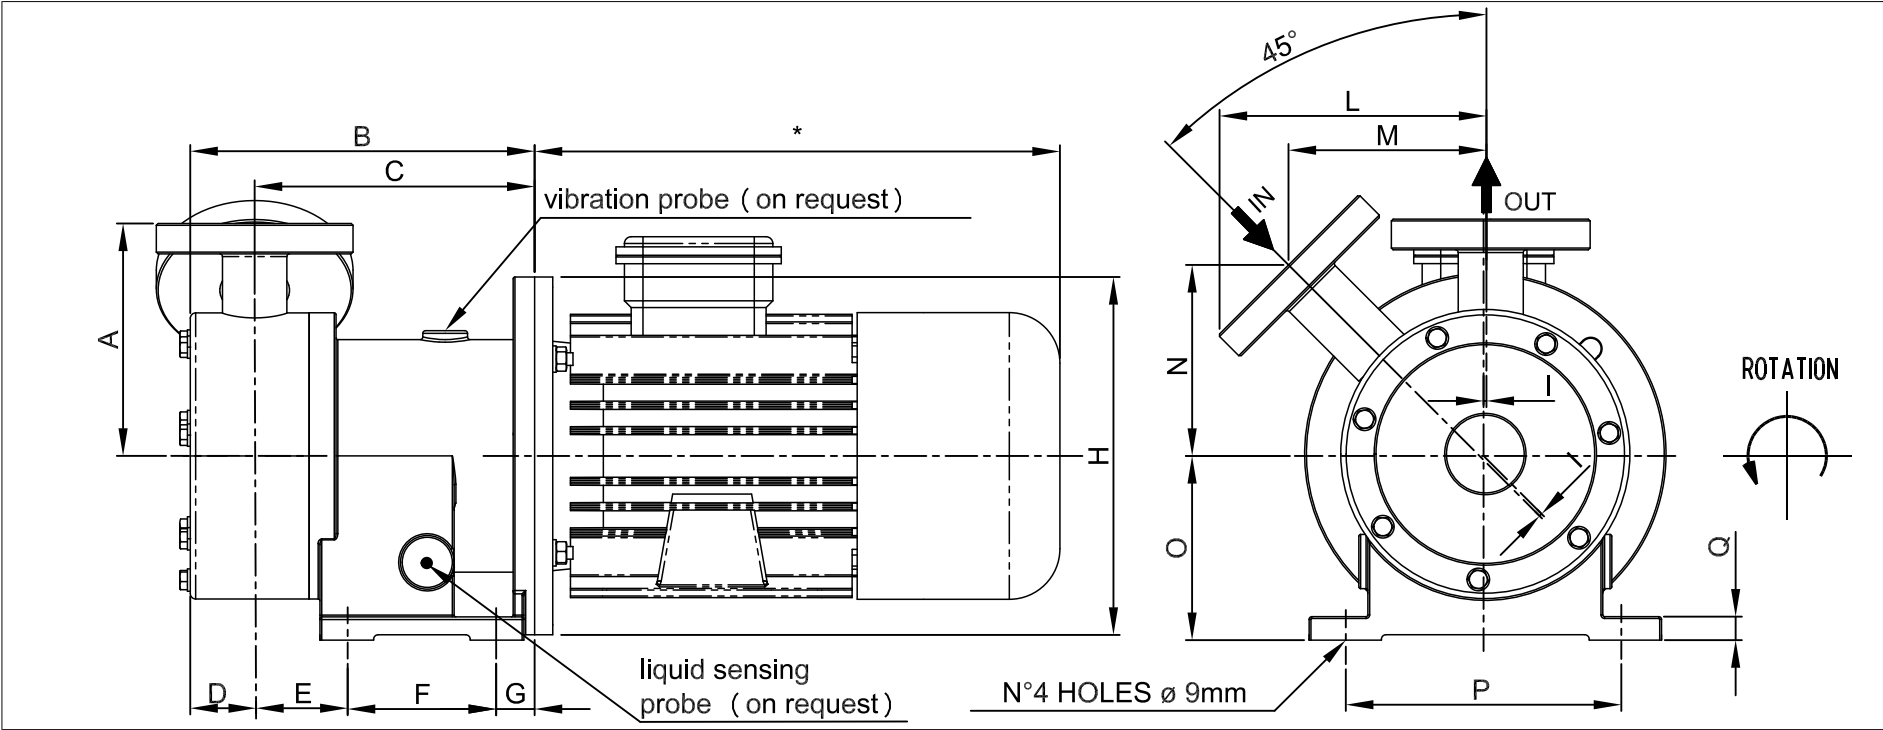


ITEM: Pump model: T MAG-P33 PP/PVDF

DIMENSIONS

A	B	C	D	E	F	G	H	I	L	M	N	O	P	Q
117	175	144	31	48	76	20	160	4.2	134	100	90	85	140	12


- This drawing is for reference only
 - Pump may be supplied without motor
 - All dimensions are in millimeters
 - All T MAG-P pumps are reversibles
- * Depend on the manufacturer

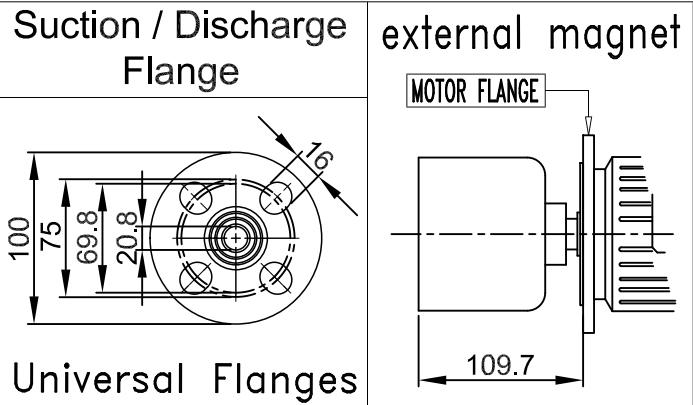

Motor: IEC Gr71 B5
Port connection: Flanges according to
DIN 2501 PN10 / ANSI B 16.5 150 lb

OUTLINE DRAWING

CODE: D 10482 Rev.:00

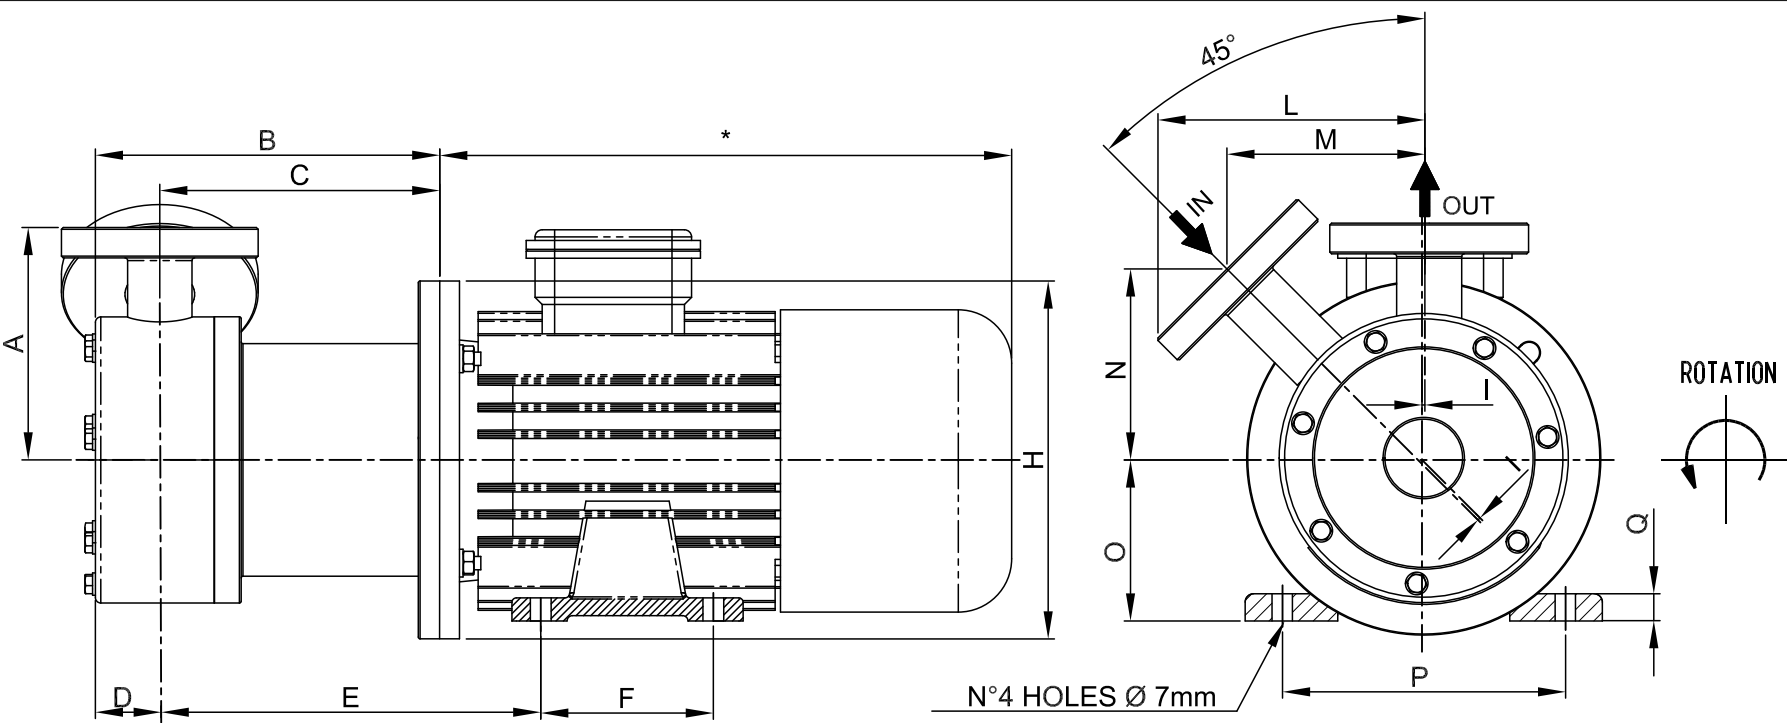


Pump model: T MAG-P33 PP/PVDF
ITEM:
Version with plastic bracket

DIMENSIONS

A	B	C	D	E	F	H	I	L	M	N	O	P	Q
117	175	144	31	189	90	160	4.2	134	100	90	71	112	7


- This drawing is for reference only
 - Pump may be supplied without motor
 - All dimensions are in millimeters
 - All T MAG-P pumps are reversibles
- * Depend on the manufacturer

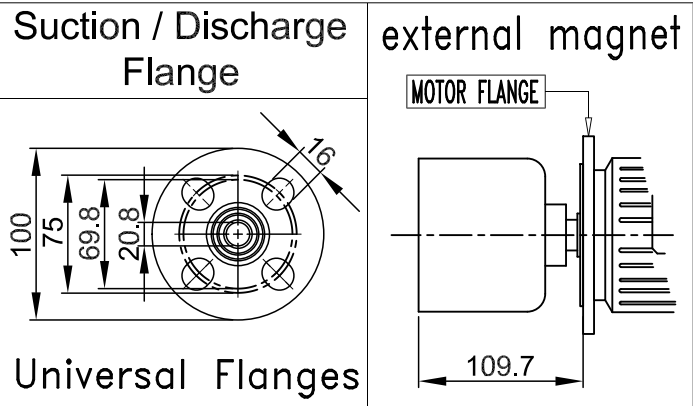

Motor: IEC Gr71 B3-B5
Port connection: Flanges according to
DIN 2501 PN10 / ANSI B 16.5 150 lb

OUTLINE DRAWING

CODE: D 10455 Rev.:00

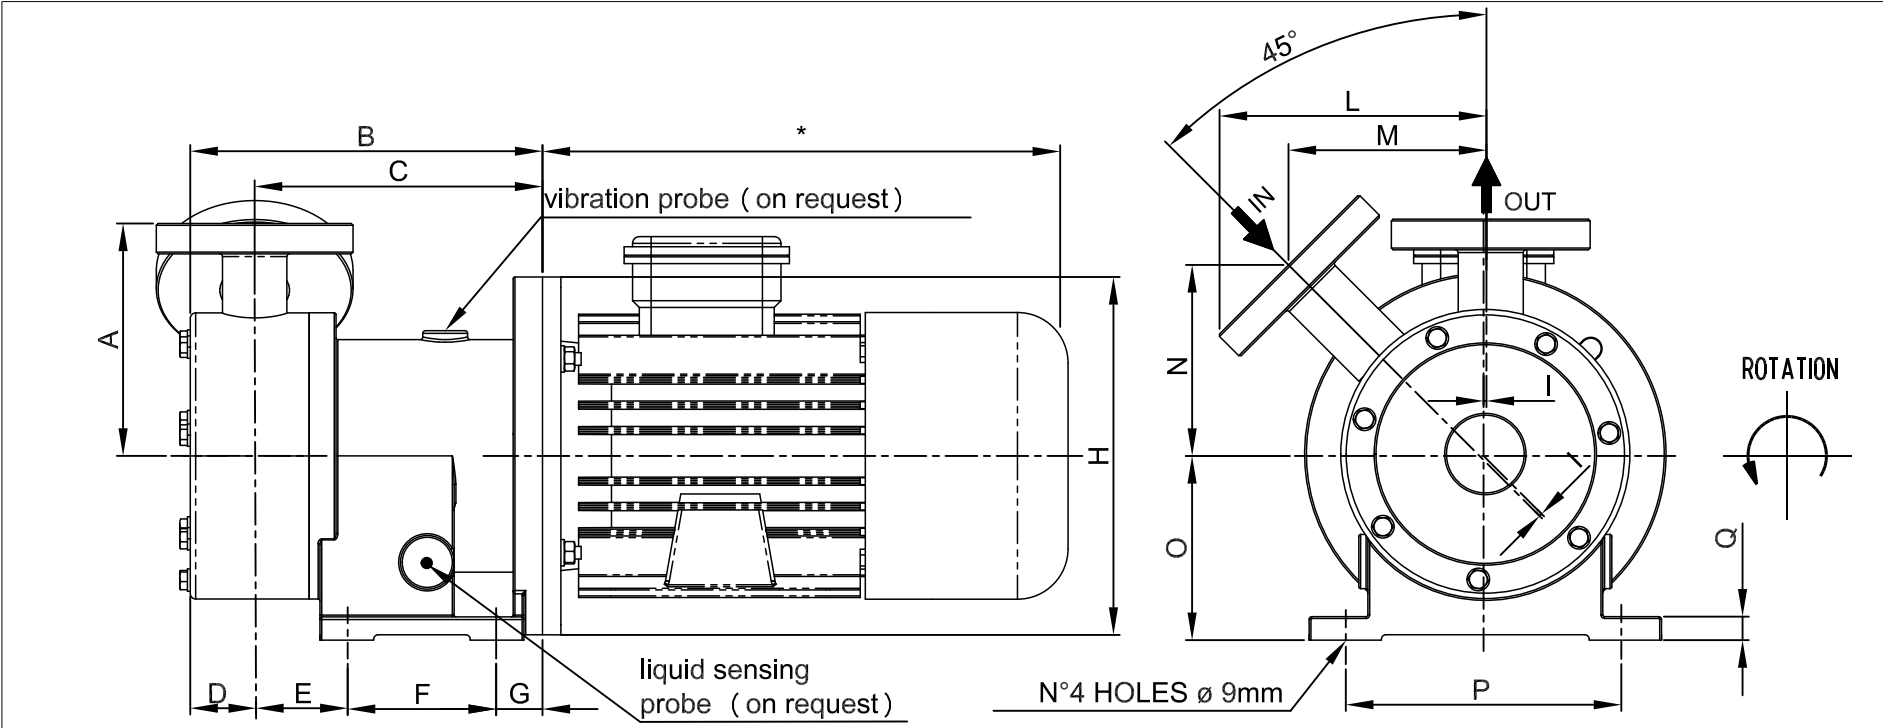


Pump model: T MAG-P52 PP/PVDF
ITEM:

DIMENSIONS

A	B	C	D	E	F	G	H	I	L	M	N	O	P	Q
117	175	144	31	48	76	20	160	4.2	143	106	96	85	140	12

- This drawing is for reference only
- Pump may be supplied without motor
- All dimensions are in millimeters
- All T MAG-P pumps are reversibles


* Depend on the manufacturer

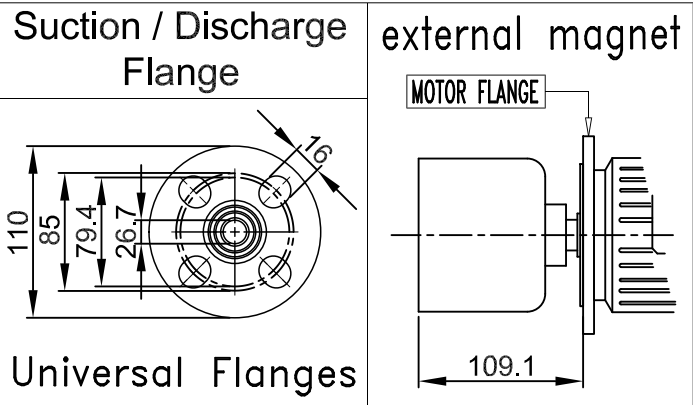

Motor: IEC Gr71 B5
Port connection: Flanges according to
DIN 2501 PN10 / ANSI B 16.5 150 lb

OUTLINE DRAWING

CODE: D 10484 Rev.:00

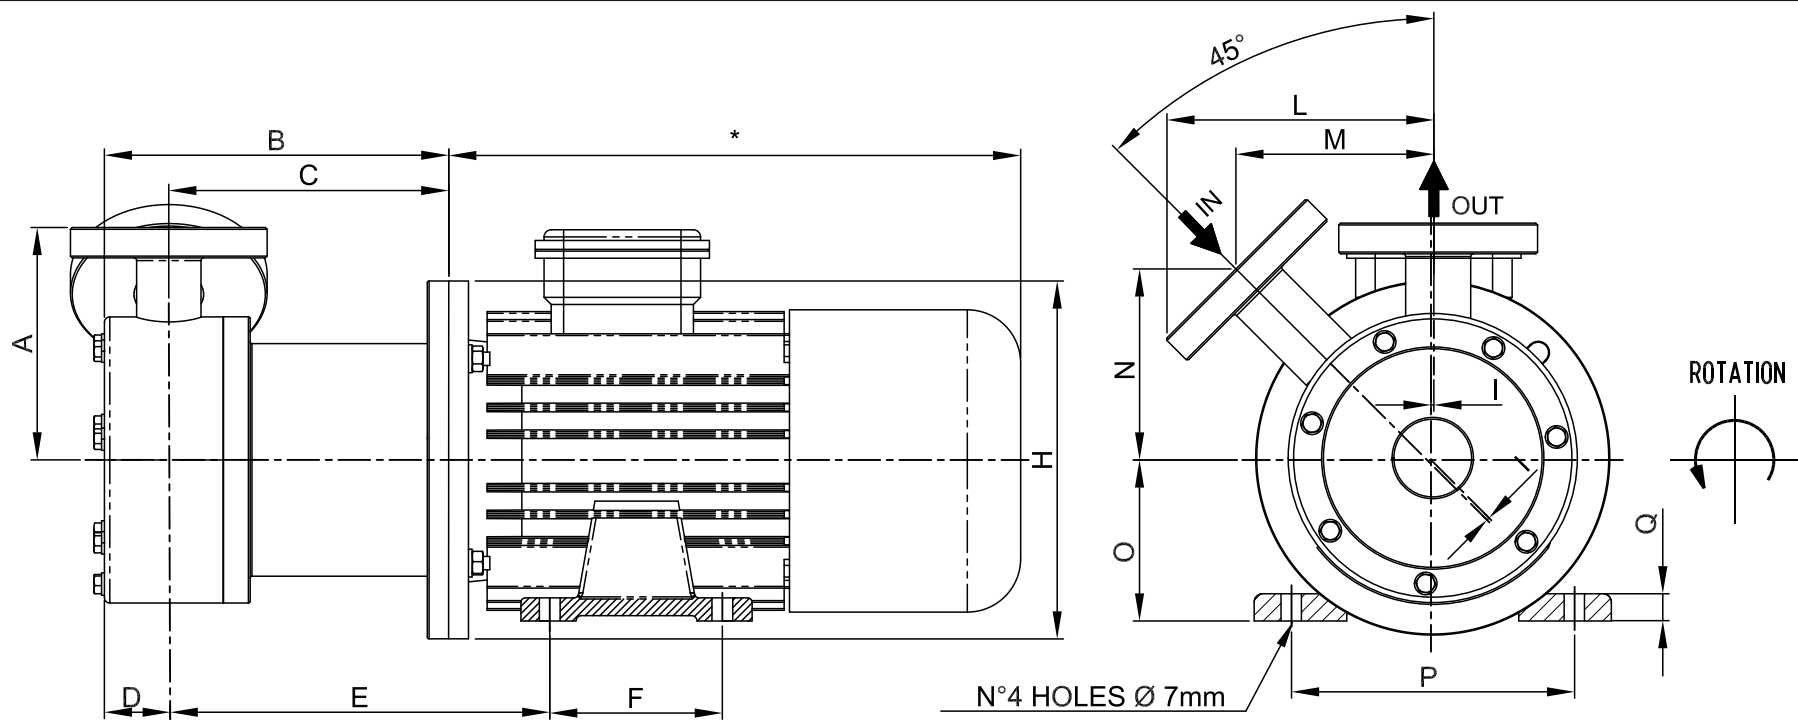


Pump model: T MAG-P52 PP/PVDF
ITEM:
Version with plastic bracket

DIMENSIONS

A	B	C	D	E	F	H	I	L	M	N	O	P	Q
117	175	144	31	189	90	160	4.2	143	106	96	71	112	7


- This drawing is for reference only
 - Pump may be supplied without motor
 - All dimensions are in millimeters
 - All T MAG-P pumps are reversibles
- * Depend on the manufacturer

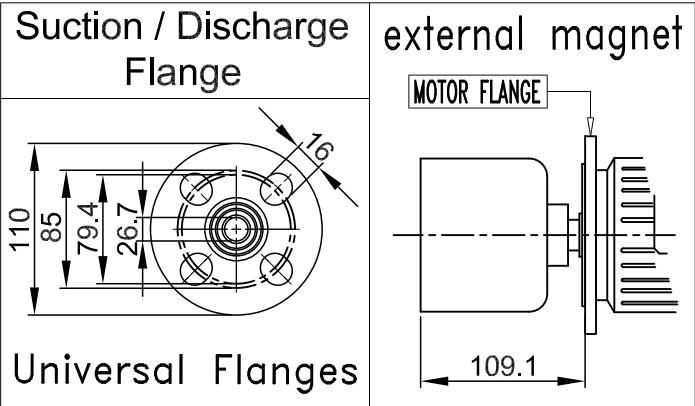

Motor: IEC Gr71 B3-B5
Port connection: Flanges according to
DIN 2501 PN10 / ANSI B 16.5 150 lb

OUTLINE DRAWING

CODE: D 10456 Rev.:00

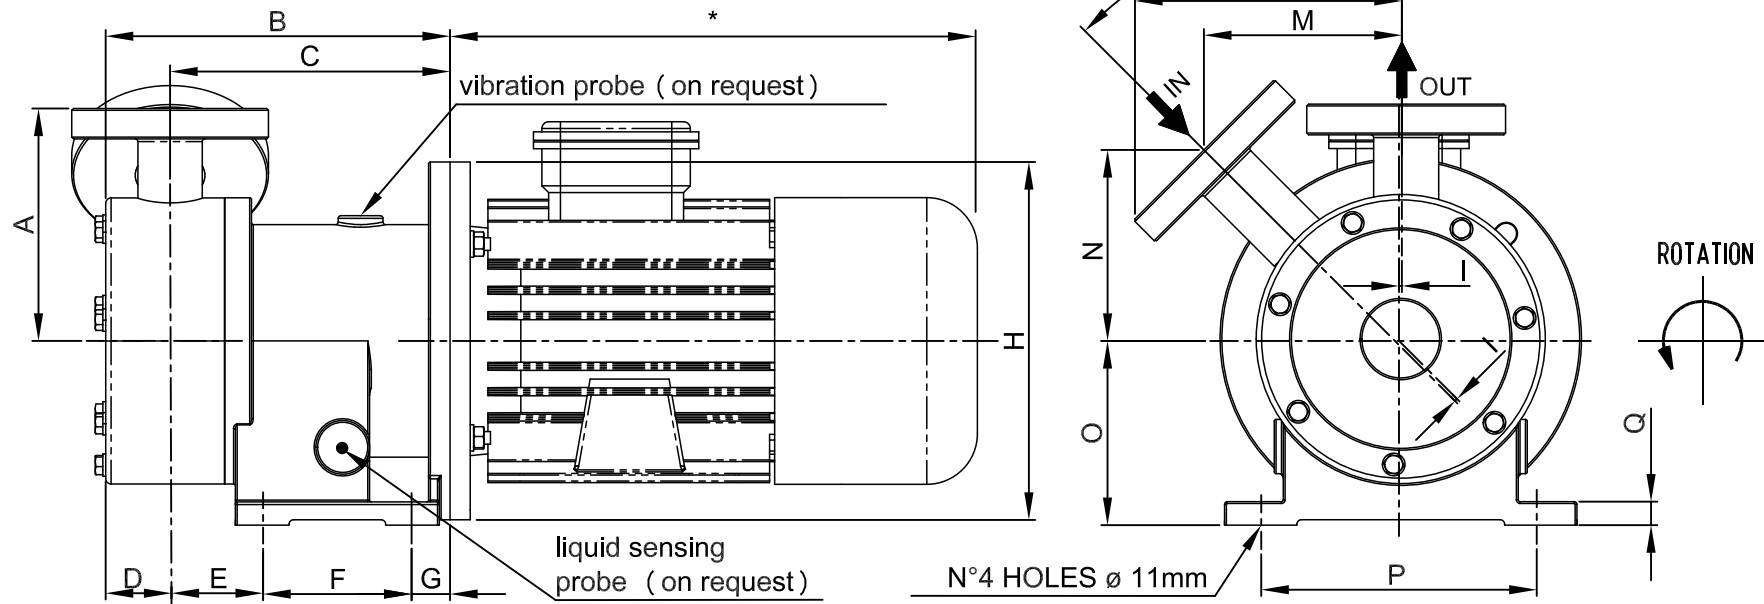


Pump model: T MAG-P53 PP/PVDF
ITEM:

DIMENSIONS

A	B	C	D	E	F	G	H	I	L	M	N	O	P	Q
127	192.5	156.5	36	51.5	85	20	200	3.2	149	112	104	103	165	13


- This drawing is for reference only
 - Pump may be supplied without motor
 - All dimensions are in millimeters
 - All T MAG-P pumps are reversibles
- * Depend on the manufacturer

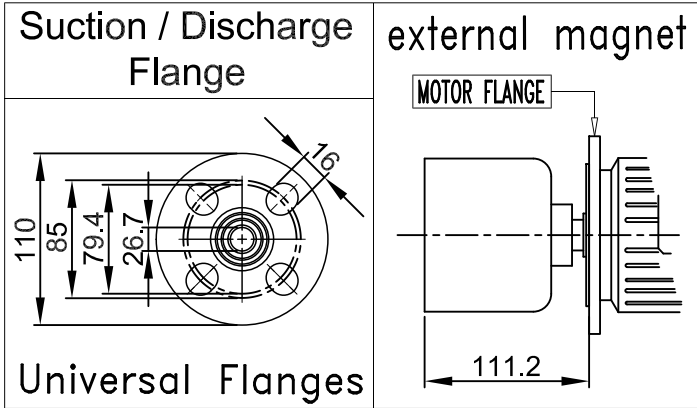

Motor: IEC Gr80 B5
Port connection: Flanges according to
DIN 2501 PN10 / ANSI B 16.5 150 lb

OUTLINE DRAWING

CODE: D 10485 Rev.:00

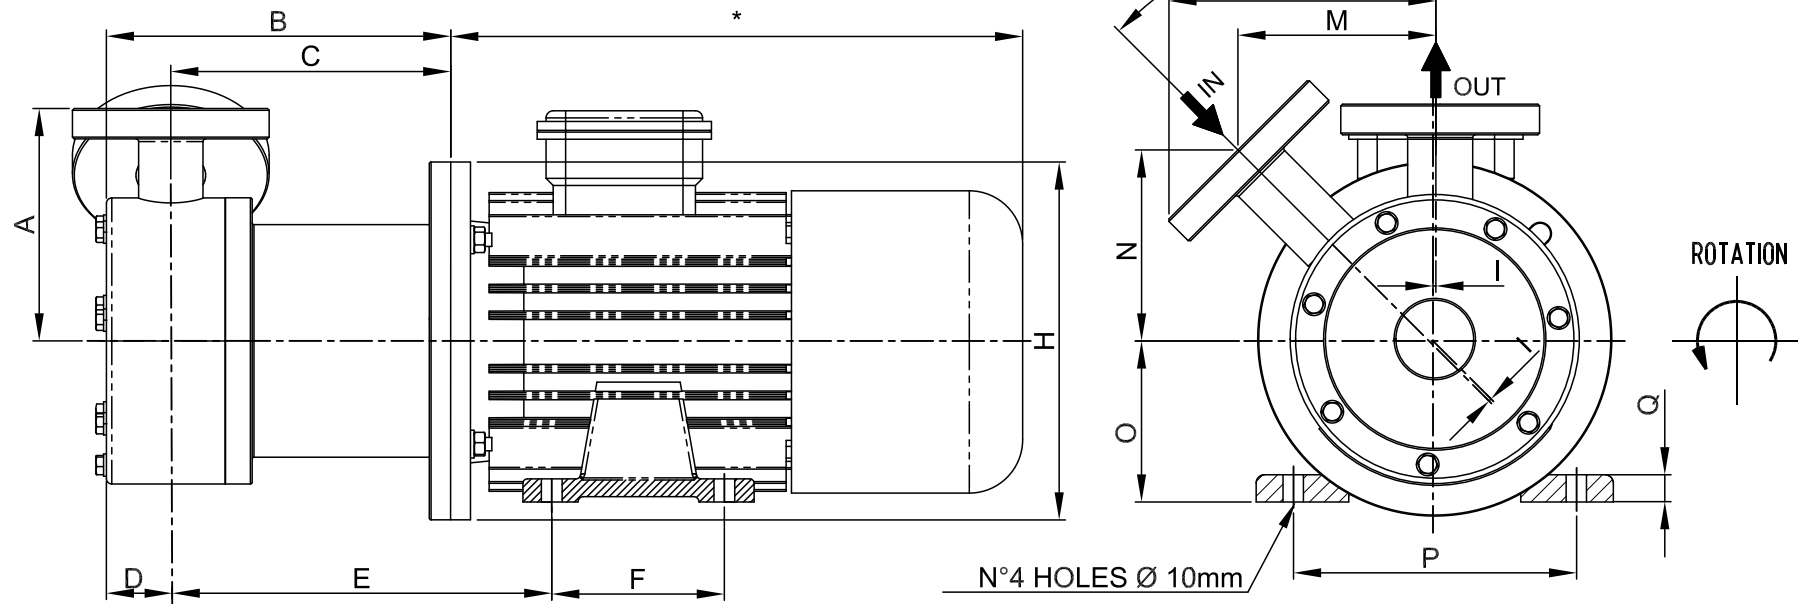

Pump model: T MAG-P53 PP/PVDF
ITEM:
Version with plastic bracket


DIMENSIONS

A	B	C	D	E	F	H	I	L	M	N	O	P	Q
127	192.5	156.5	36	207	100	200	3.2	149	112	104	80	125	8

- This drawing is for reference only
- Pump may be supplied without motor
- All dimensions are in millimeters
- All T MAG-P pumps are reversibles


* Depend on the manufacturer

Suction / Discharge Flange



Universal Flanges


external magnet



Motor: IEC Gr80 B3-B5
Port connection: Flanges according to
DIN 2501 PN10 / ANSI B 16.5 150 lb

OUTLINE DRAWING

CODE: D 10457 Rev.:00

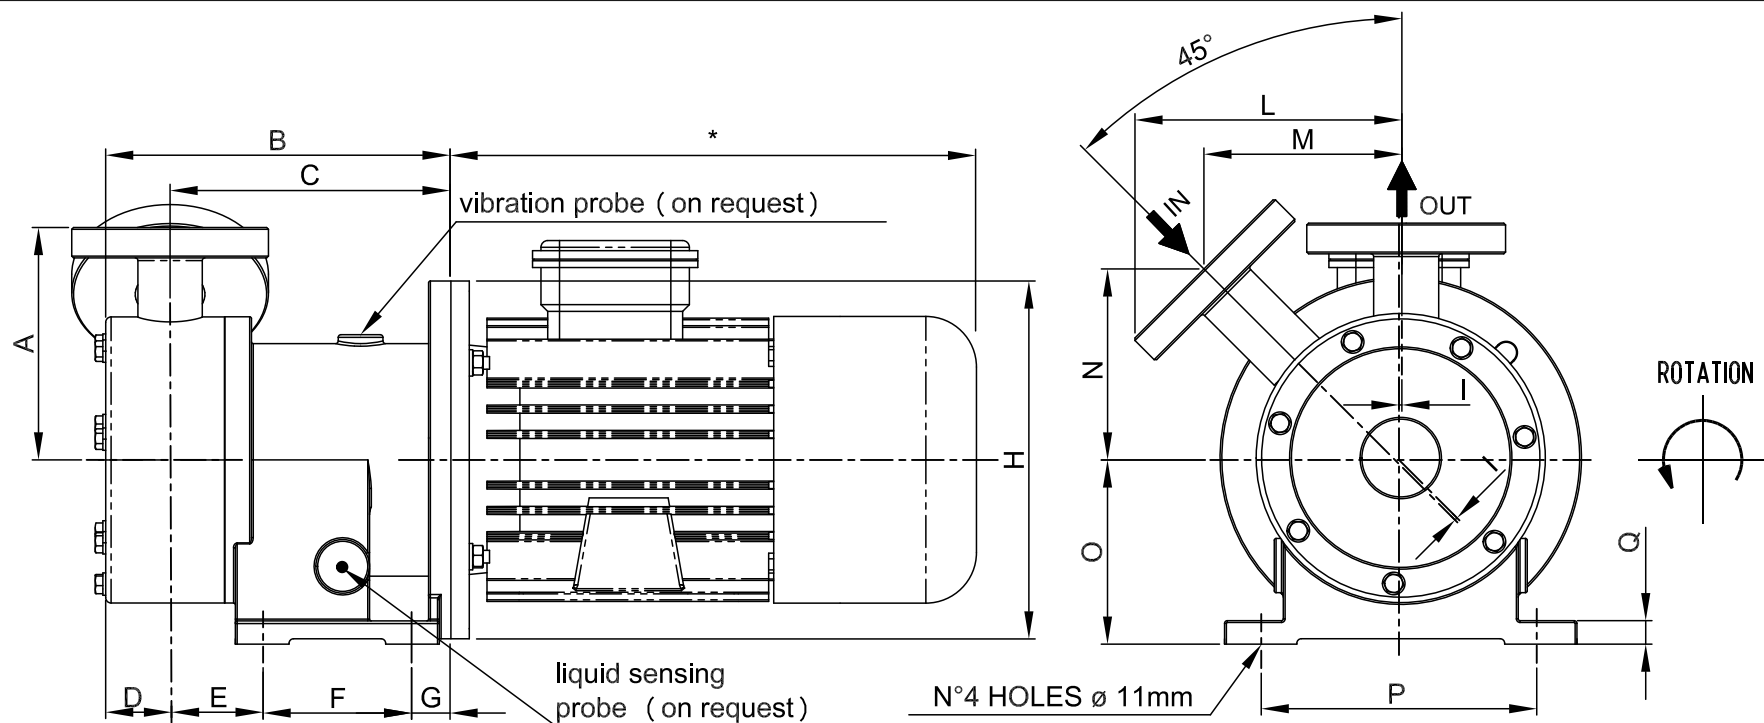


ITEM: Pump model: T MAG-P72 PP/PVDF

DIMENSIONS

A	B	C	D	E	F	G	H	I	L	M	N	O	P	Q
127	192.5	156.5	36	51.5	85	20	200	3.2	149	112	104	103	165	13


- This drawing is for reference only
 - Pump may be supplied without motor
 - All dimensions are in millimeters
 - All T MAG-P pumps are reversibles
- * Depend on the manufacturer

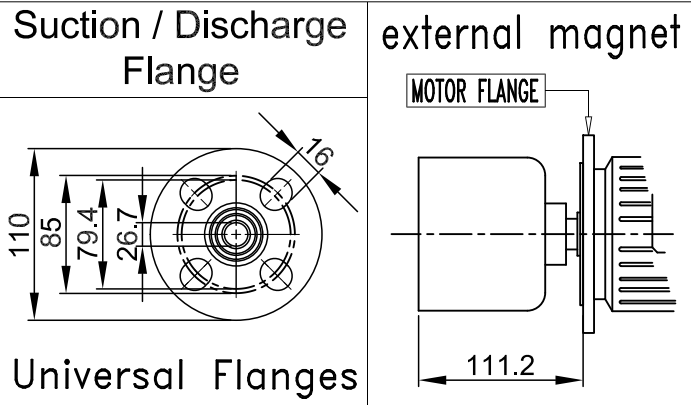

Motor: IEC Gr80 B5
Port connection: Flanges according to
DIN 2501 PN10 / ANSI B 16.5 150 lb

OUTLINE DRAWING

CODE: D 10486 Rev.:00

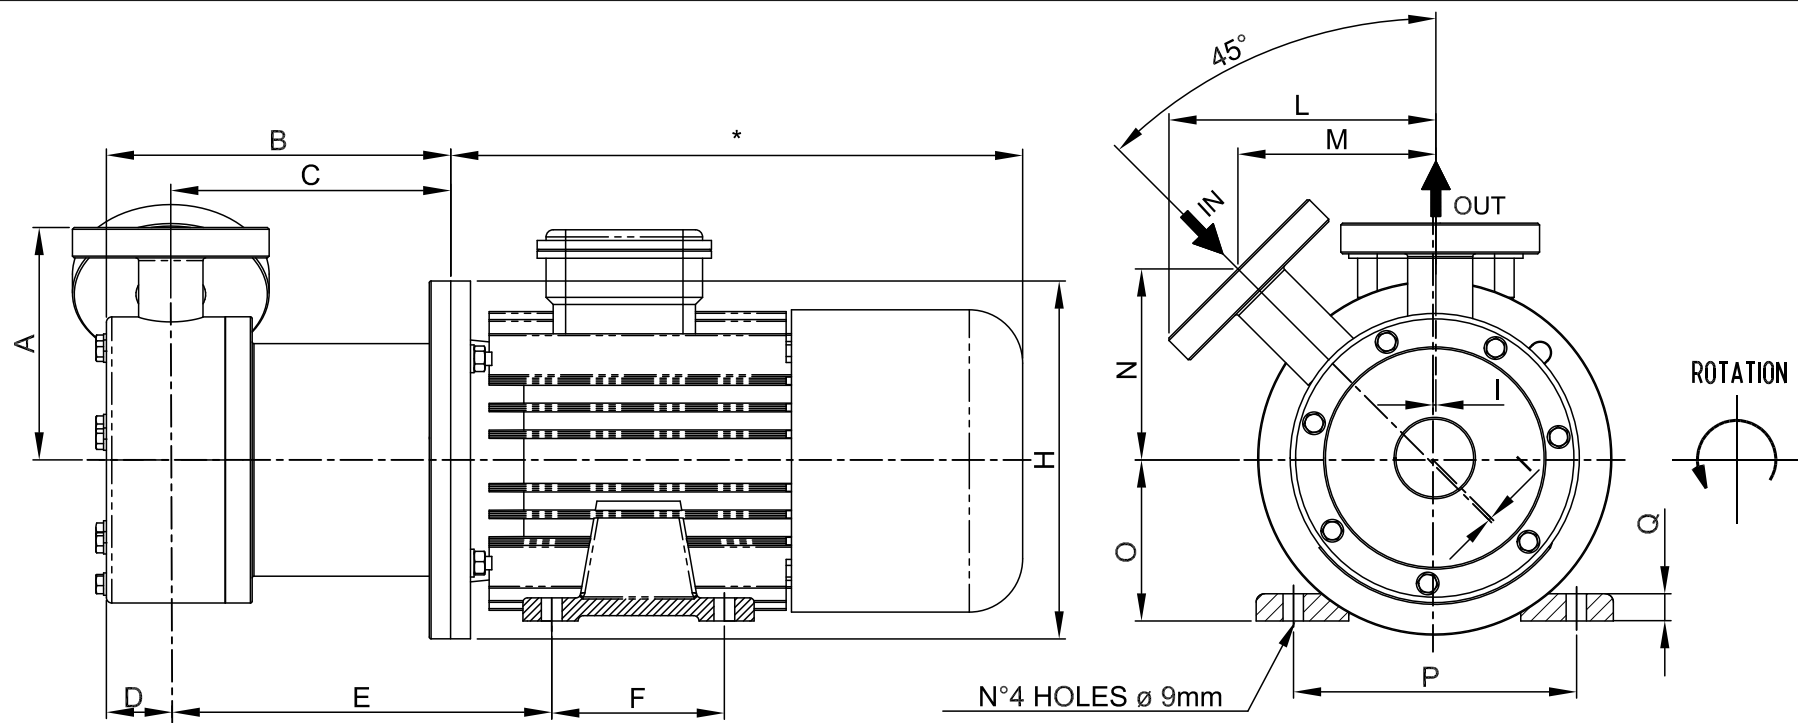

Pump model: T MAG-P72 PP/PVDF
ITEM:
Version with plastic bracket


DIMENSIONS

A	B	C	D	E	F	H	I	L	M	N	O	P	Q
127	192.5	156.5	36.4	206.1	100	200	3.2	149	112	104	80	125	8

- This drawing is for reference only
- Pump may be supplied without motor
- All dimensions are in millimeters
- All T MAG-P pumps are reversibles


* Depend on the manufacturer

Suction / Discharge Flange



Universal Flanges

external magnet



Motor: IEC Gr80 B3-B5
Port connection: Flanges according to
DIN 2501 PN10 / ANSI B 16.5 150 lb


OUTLINE DRAWING

CODE: D 10458 Rev.:00



Pump model: T MAG-P73 PP/PVDF


ITEM:

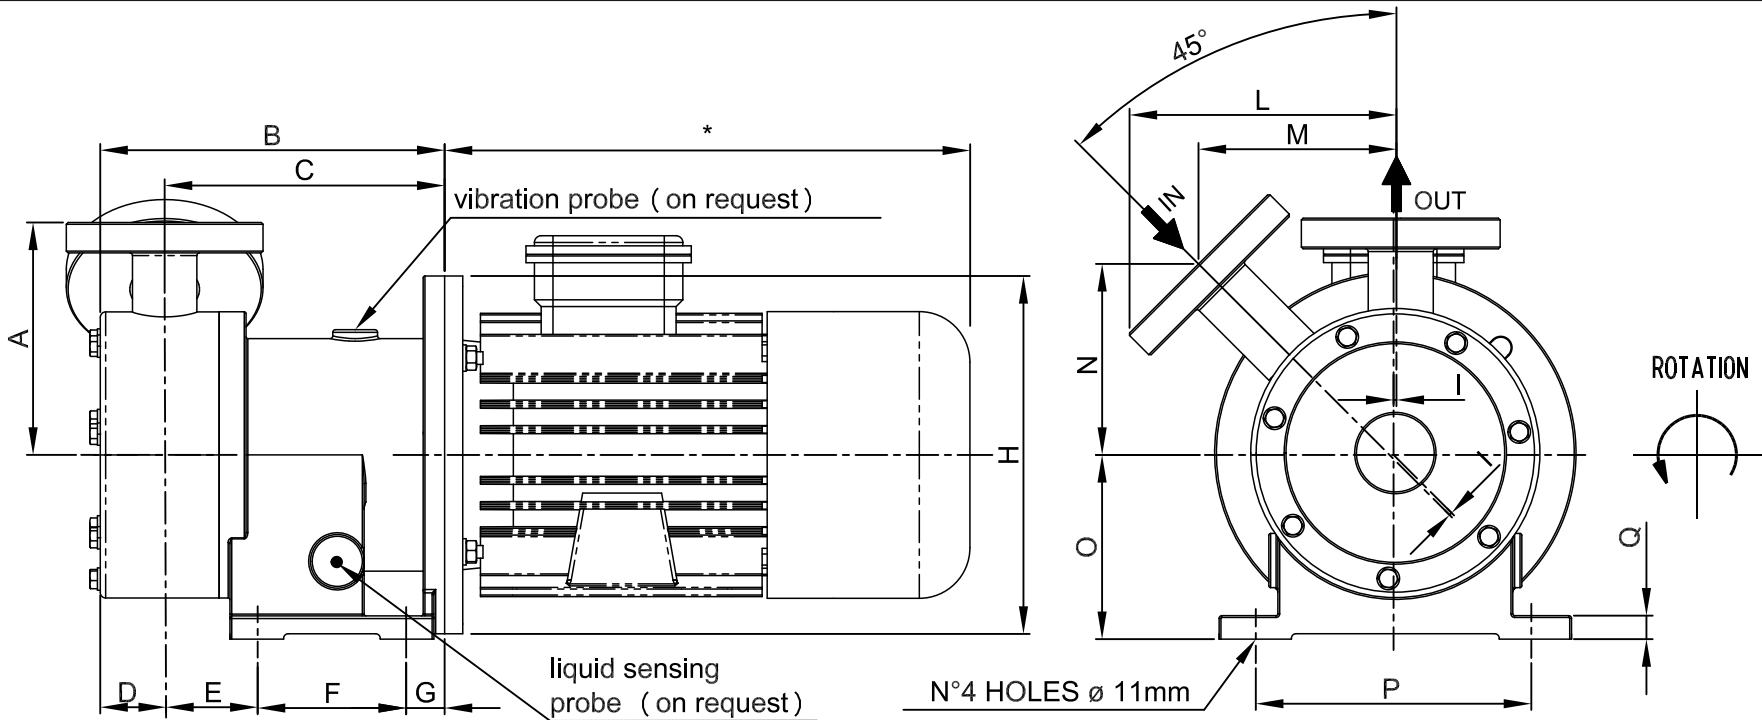

DIMENSIONS

A	B	C	D	E	F	G	H	I	L	M	N	O	P	Q
142	231	191	40	64	106	21	200	4.5	154	117	106	105	180	13

- This drawing is for reference only
 - Pump may be supplied without motor
 - All dimensions are in millimeters
 - All T MAG-P pumps are reversibles
- * Depend on the manufacturer

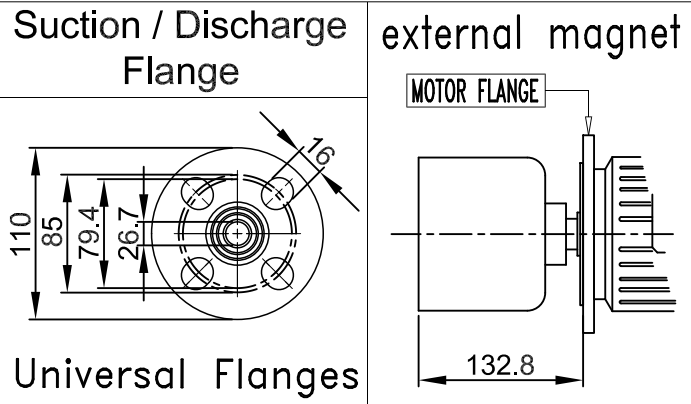


Motor: IEC Gr90 B5

Port connection: Flanges according to
DIN 2501 PN10 / ANSI B 16.5 150 lb

OUTLINE DRAWING

CODE: D 10487 Rev.:00

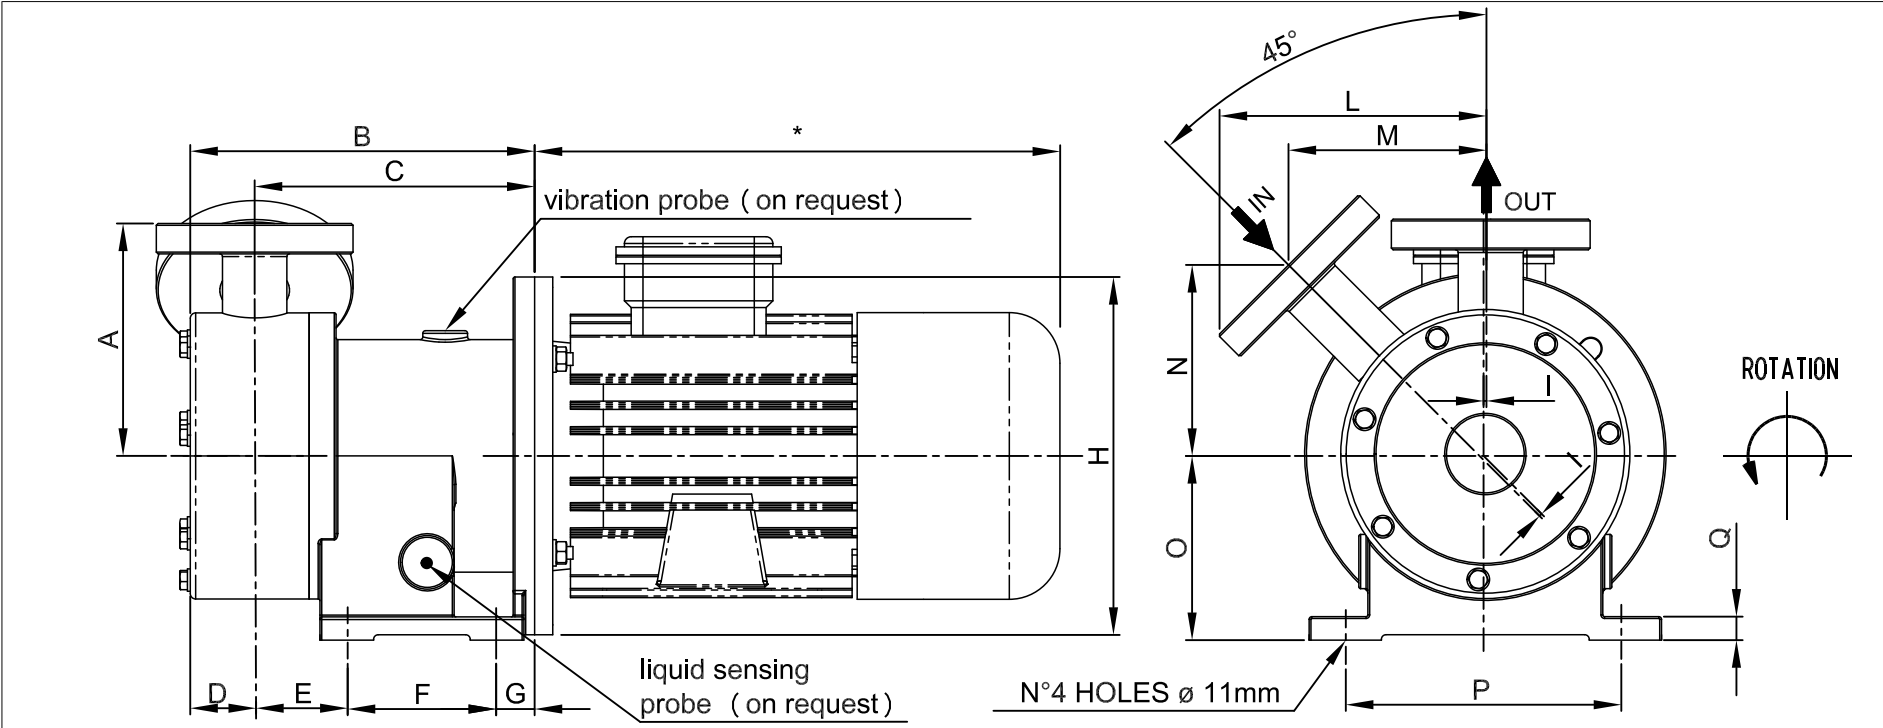


Pump model: T MAG-P73 PP/PVDF
ITEM:

DIMENSIONS

A	B	C	D	E	F	G	H	I	L	M	N	O	P	Q
142	241	201	40	60	120	21	250	4.5	154	117	106	135	180	15

- This drawing is for reference only
 - Pump may be supplied without motor
 - All dimensions are in millimeters
 - All T MAG-P pumps are reversibles
- * Depend on the manufacturer

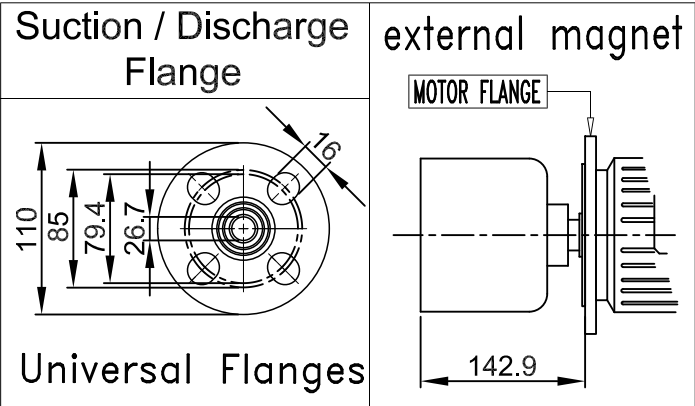


Motor: IEC Gr100/112 B5
Port connection: Flanges according to DIN 2501 PN10 / ANSI B 16.5 150 lb

OUTLINE DRAWING

CODE: D 10459 Rev.:00



Pump model: T MAG-P92 PP/PVDF
ITEM:

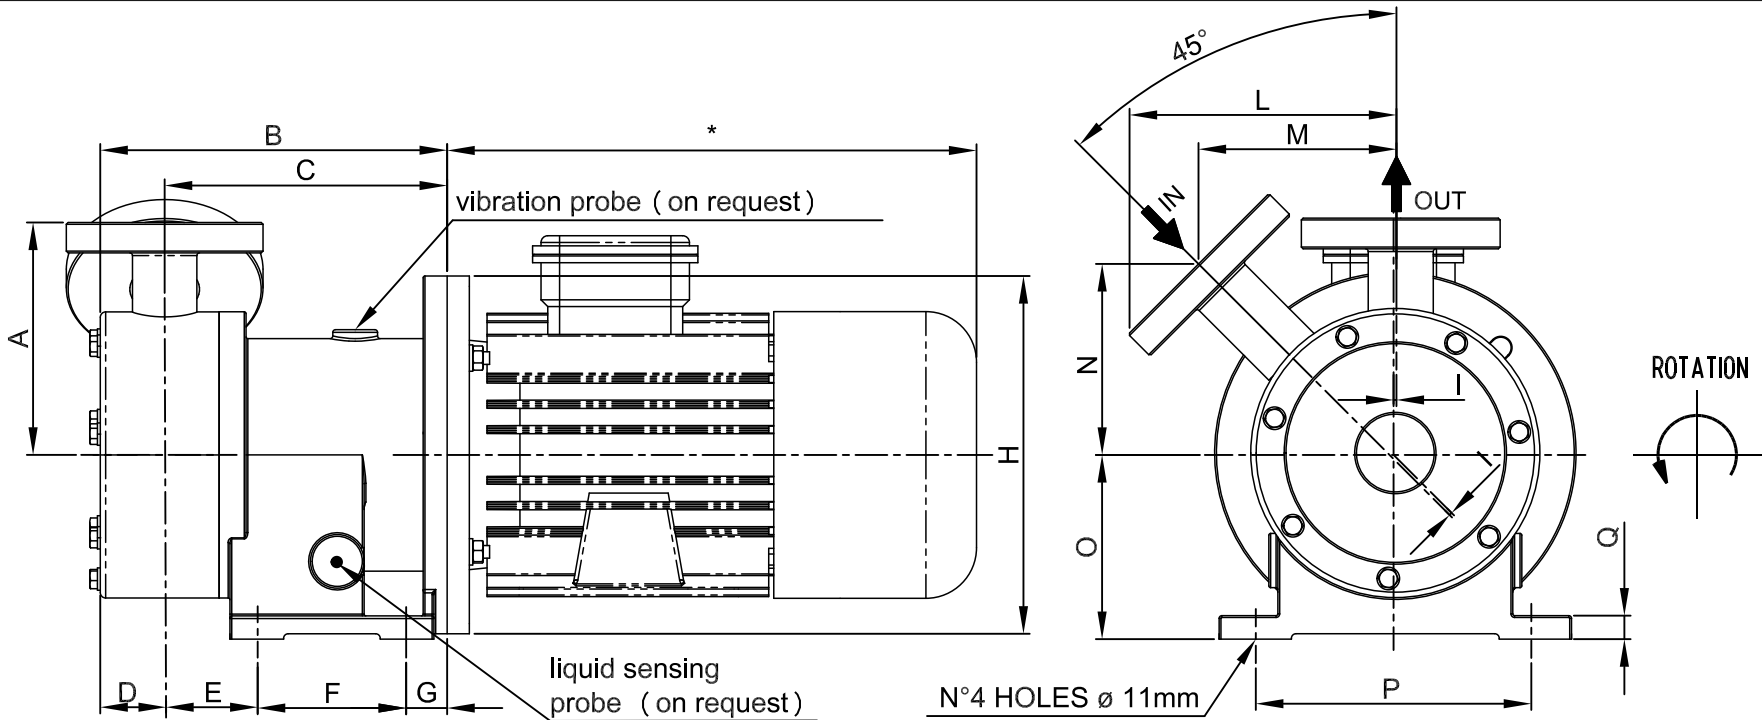


DIMENSIONS

A	B	C	D	E	F	G	H	I	L	M	N	O	P	Q
142	231	191	40	64	106	20.8	200	4.5	154	117	106	105	180	13

- This drawing is for reference only
- Pump may be supplied without motor
- All dimensions are in millimeters
- All T MAG-P pumps are reversibles


* Depend on the manufacturer

Suction / Discharge Flange

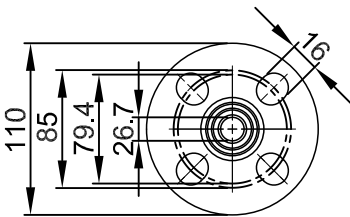

Universal Flanges

external magnet




Motor: IEC Gr90 B5
Port connection: Flanges according to
DIN 2501 PN10 / ANSI B 16.5 150 lb

OUTLINE DRAWING

CODE: D 10460 Rev.:00




Pump model: T MAG-P93 PP/PVDF
ITEM:

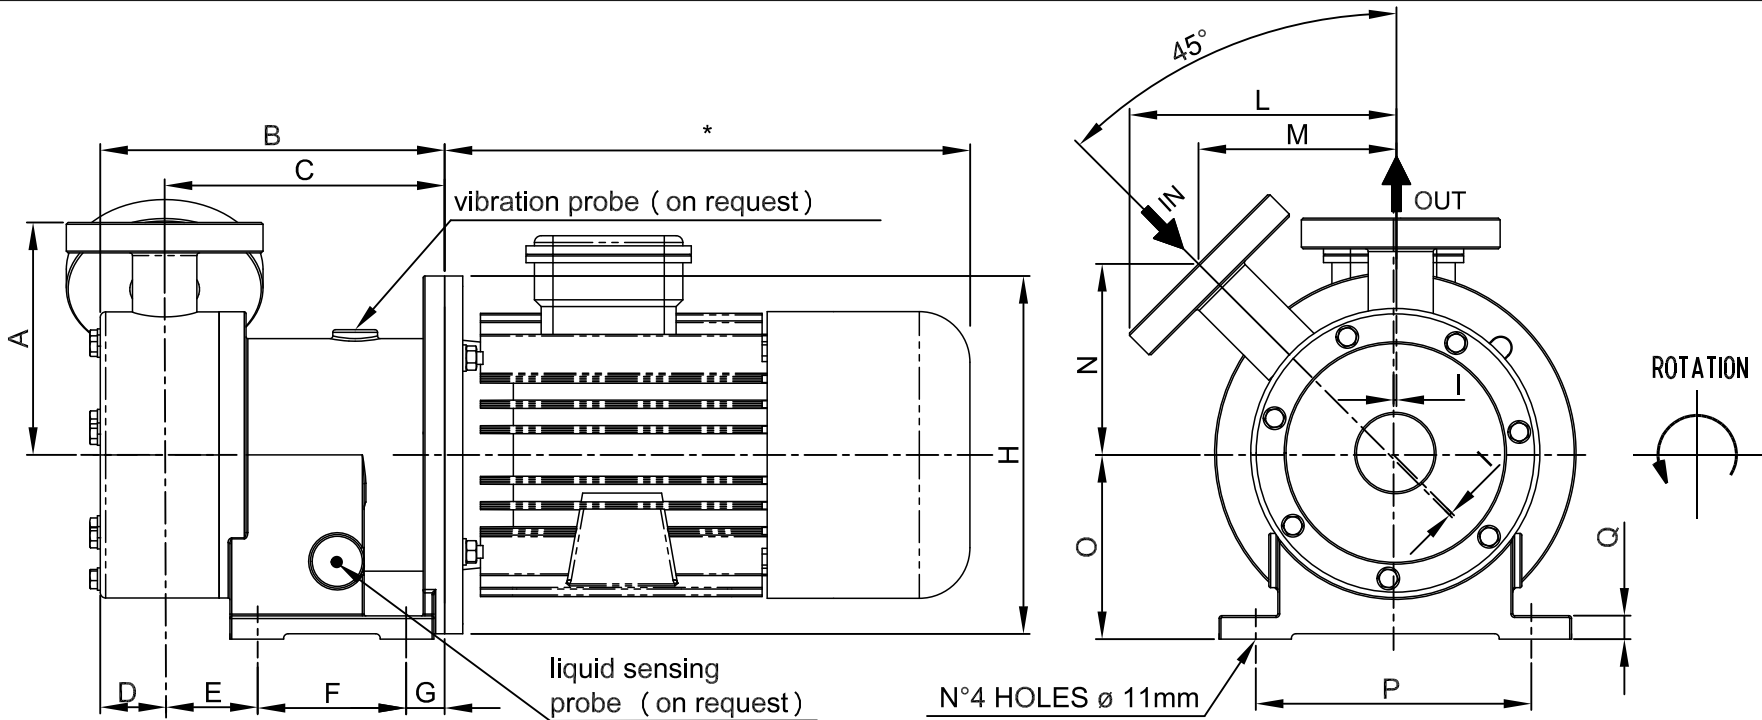

DIMENSIONS

A	B	C	D	E	F	G	H	I	L	M	N	O	P	Q
142	241	201	40	60	120	21	250	4.5	154	117	106	135	180	15

- This drawing is for reference only
 - Pump may be supplied without motor
 - All dimensions are in millimeters
 - All T MAG-P pumps are reversibles
- * Depend on the manufacturer

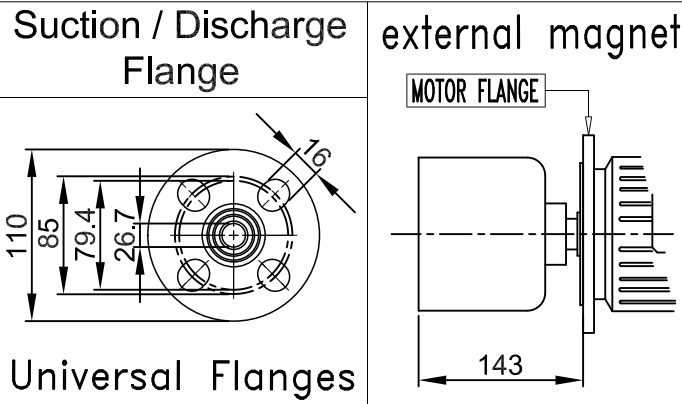

Motor: IEC Gr100/112 B5
Port connection: Flanges according to
DIN 2501 PN10 / ANSI B 16.5 150 lb


OUTLINE DRAWING

CODE: D 10461 Rev.:00



Pump model: T MAG-P122 PP/PVDF

ITEM:

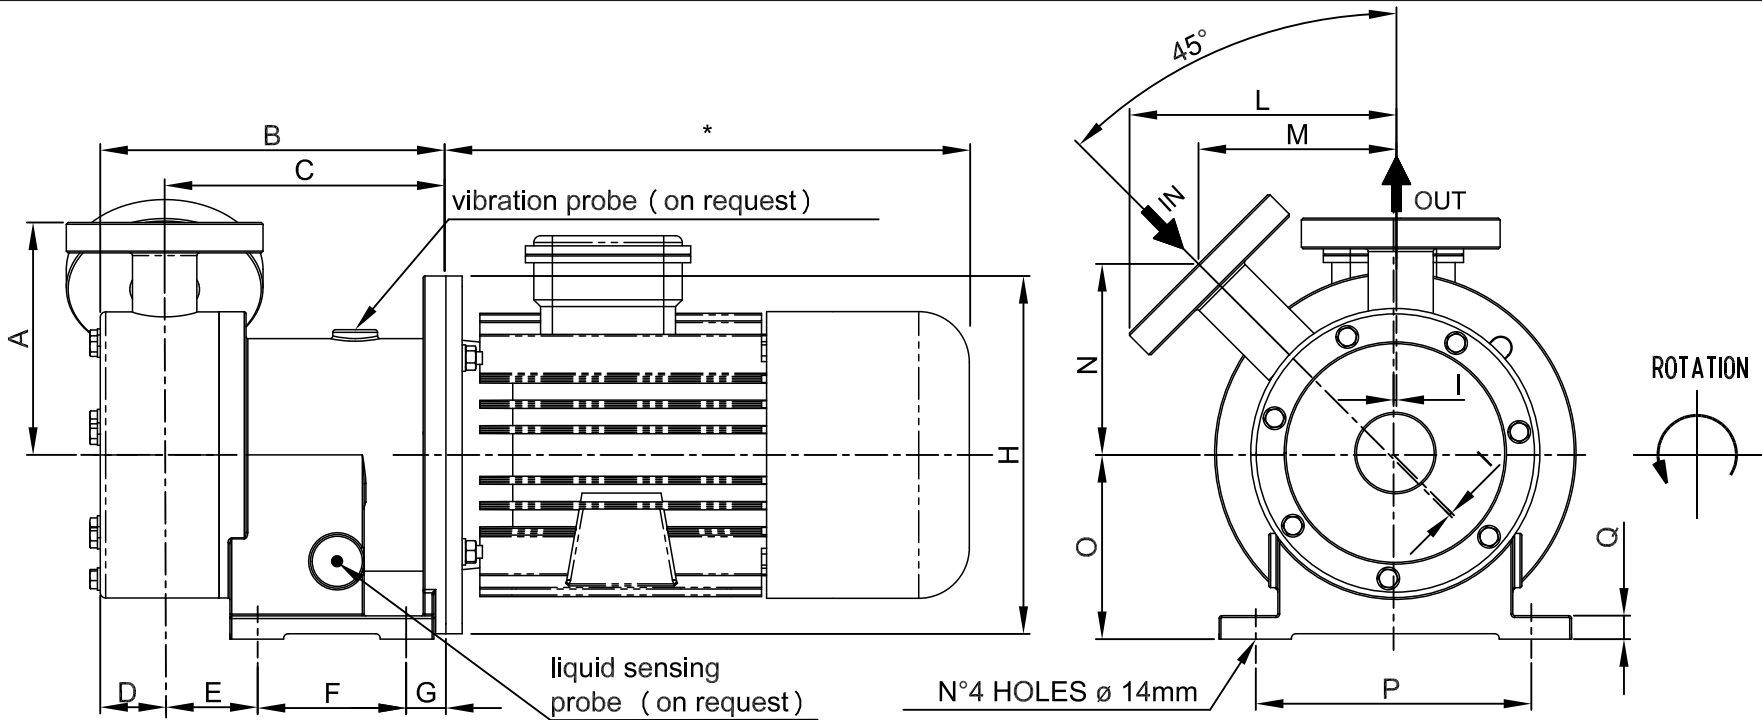


DIMENSIONS

A	B	C	D	E	F	G	H	I	L	M	N	O	P	Q
166	266.5	223	43.5	85.5	100	37.5	250	7	186.5	140	123	135	210	15

- This drawing is for reference only
- Pump may be supplied without motor
- All dimensions are in millimeters
- All T MAG-P pumps are reversibles


* Depend on the manufacturer

Suction / Discharge Flange



Universal Flanges

external magnet



Port connection: Flanges according to
DIN 2501 PN10 / ANSI B 16.5 150 lb

Motor: IEC Gr100/112 B5


OUTLINE DRAWING

CODE: D 10462 Rev.:00



Pump model: T MAG-P123 PP/PVDF

ITEM:

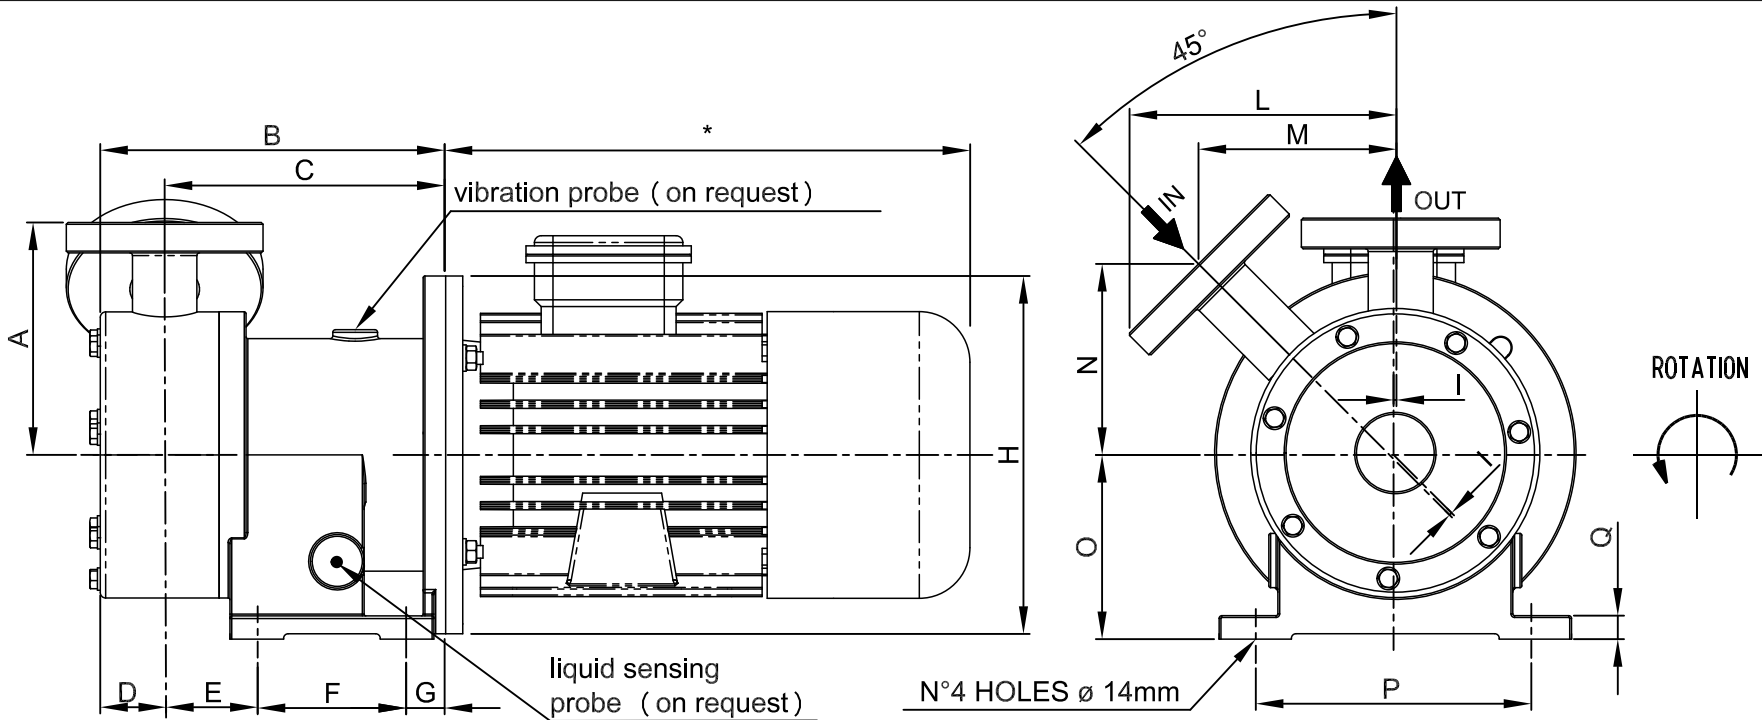


DIMENSIONS

A	B	C	D	E	F	G	H	I	L	M	N	O	P	Q
166	286.5	243	43.5	85.5	120	37.5	300	7	186.5	140	123	153	210	15

- This drawing is for reference only
- Pump may be supplied without motor
- All dimensions are in millimeters
- All T MAG-P pumps are reversibles


* Depend on the manufacturer

Suction / Discharge Flange



Universal Flanges

external magnet



Port connection: Flanges according to
DIN 2501 PN10 / ANSI B 16.5 150 lb

Motor: IEC Gr132 B5


OUTLINE DRAWING

CODE: D 10463 Rev.:00



Pump model: T MAG-P160 PP/PVDF


ITEM:

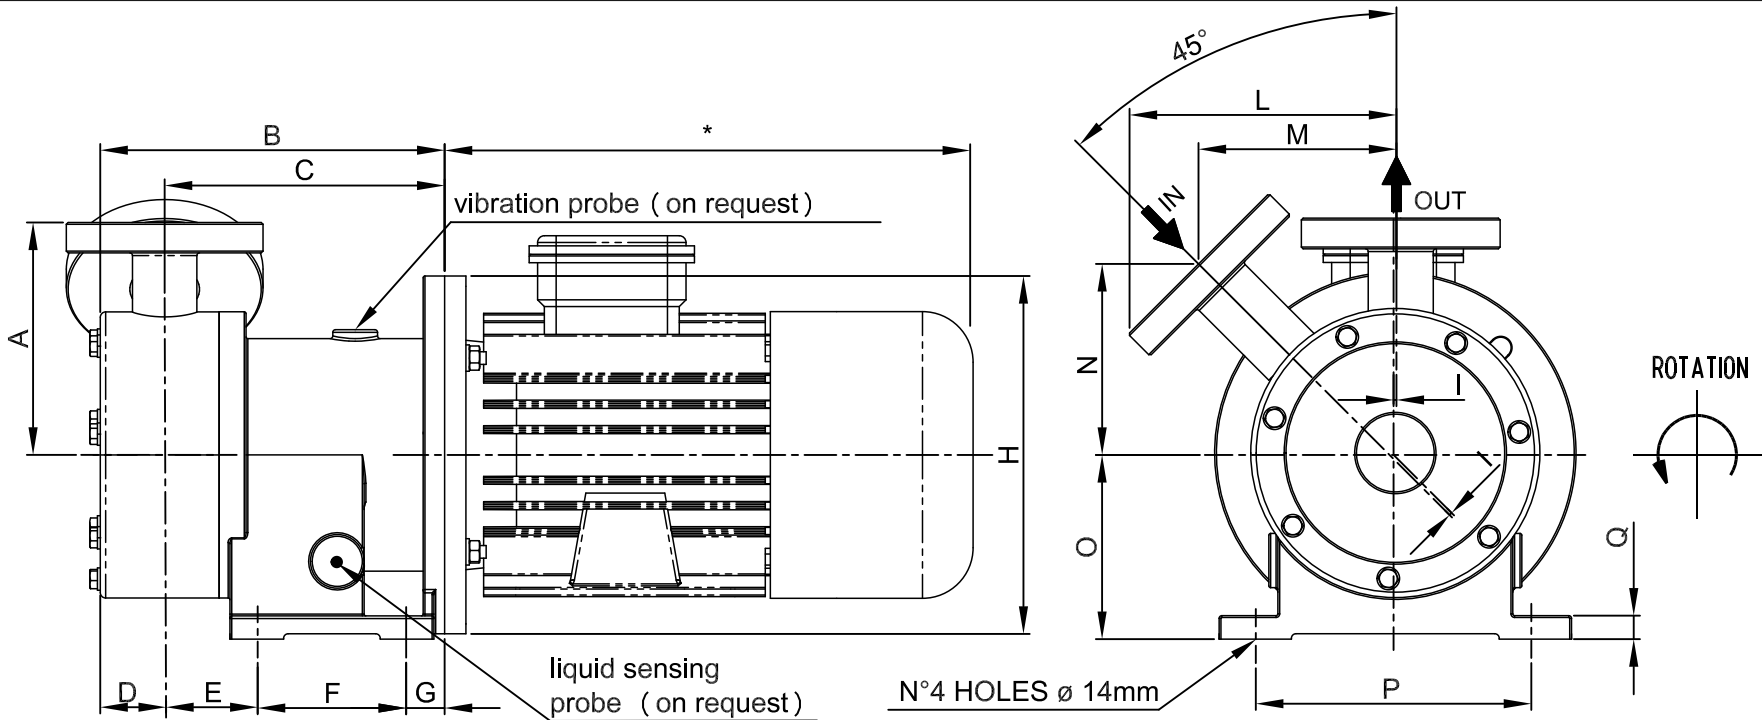

DIMENSIONS

A	B	C	D	E	F	G	H	I	L	M	N	O	P	Q
178.5	288	245	43.5	87.5	120	37.5	300	7	195.5	149	132	153	210	15

- This drawing is for reference only
 - Pump may be supplied without motor
 - All dimensions are in millimeters
 - All T MAG-P pumps are reversibles
- * Depend on the manufacturer

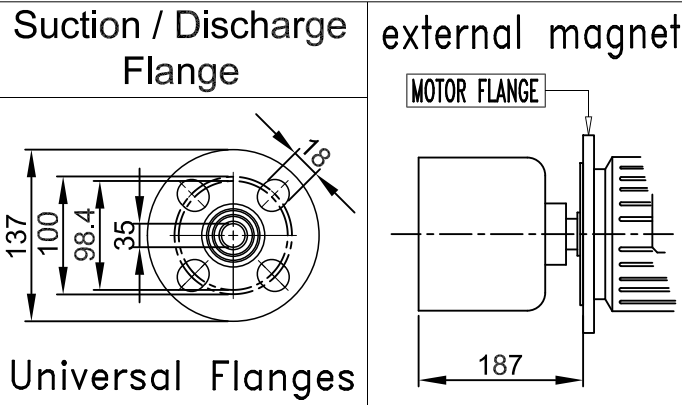

Port connection: Flanges according to
DIN 2501 PN10 / ANSI B 16.5 150 lb

Motor: IEC Gr132 B5