


Ampco Centrifugal Pumps

DATA SHEET



MODEL LM-V521 65 x 50

MODEL LM-V522 65 x 50

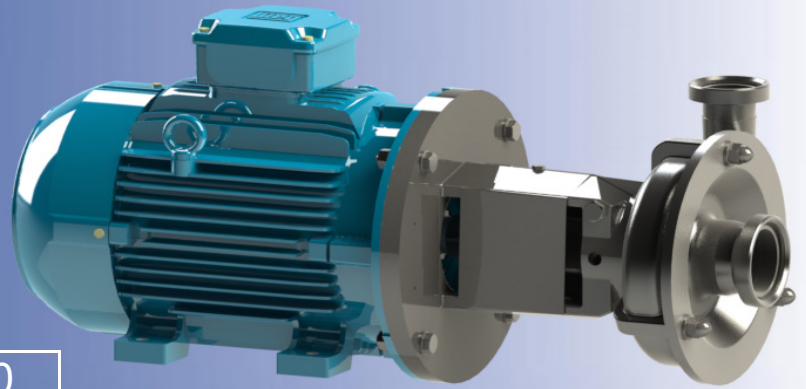

CE

Connections DIN 11851 thread

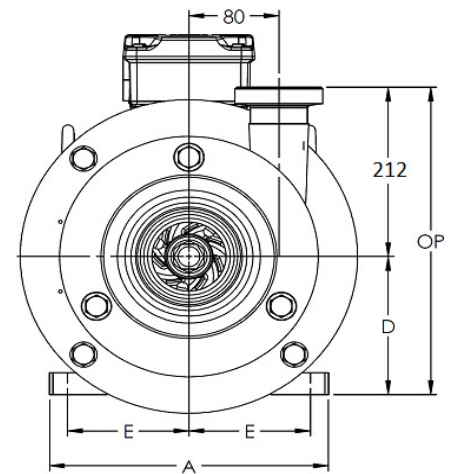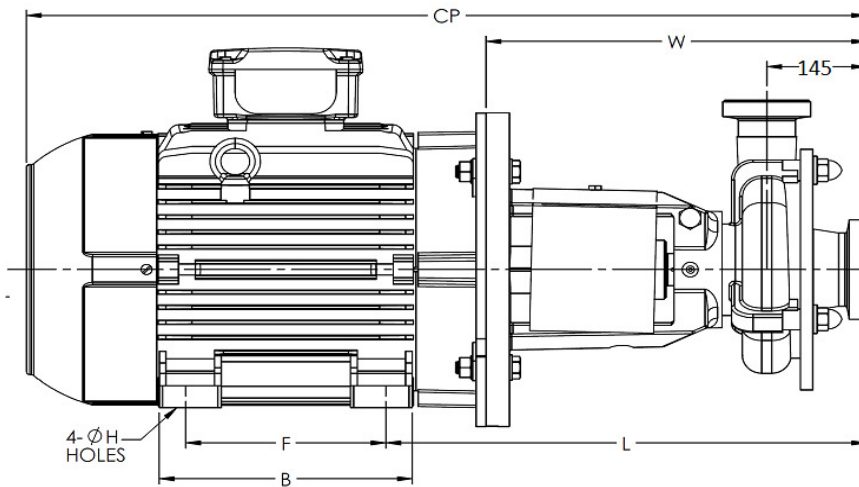

TEFC MOTOR			DIMENSIONS IN MILLIMETERS							(All Values For Reference Only)			MASS
			Data subject to change without notice.										
kW	RPM	FRAME	A (typ)	B (typ)	D	E	F	ØH	L	W	CP	OP	Kg
0.75kW	1450	80	149	125.5	80	62.5	100	10	295	245	523	270	30
1.1kW	1450	90S	164	131	90	70	100	10	301	245	523	280	34
1.5kW	1450	90L	164	156	90	70	125	10	301	245	523	280	37
4kW	2900	112M	220	177	112	95	140	12	338	268	602	302	57
5.5kW	2900	132S	248	187	132	108	140	12	428	339	747	322	85
7.5kW	2900	132S	248	187	132	108	140	12	428	339	747	322	85
11kW	2900	160M	308	254	160	127	210	14.5	447	339	834	350	154

MATERIAL SPECIFICATIONS

PART NAME	STAINLESS STEEL
Casing, Cover & Impeller	316L Stainless
Stub Shaft	316L Stainless
Adapter	304 Stainless

PUMP CURVES

MODEL LM-V521 65 x 50


MODEL LM-V522 65 x 50

Ampco Centrifugal Pumps


Curves show approximate characteristics based on clear 20°C water.
Rated point is guaranteed

LM-Series pumps have standard stainless steel adapters and silicon carbide vs. carbon seals.

LM-V522 2900 RPM

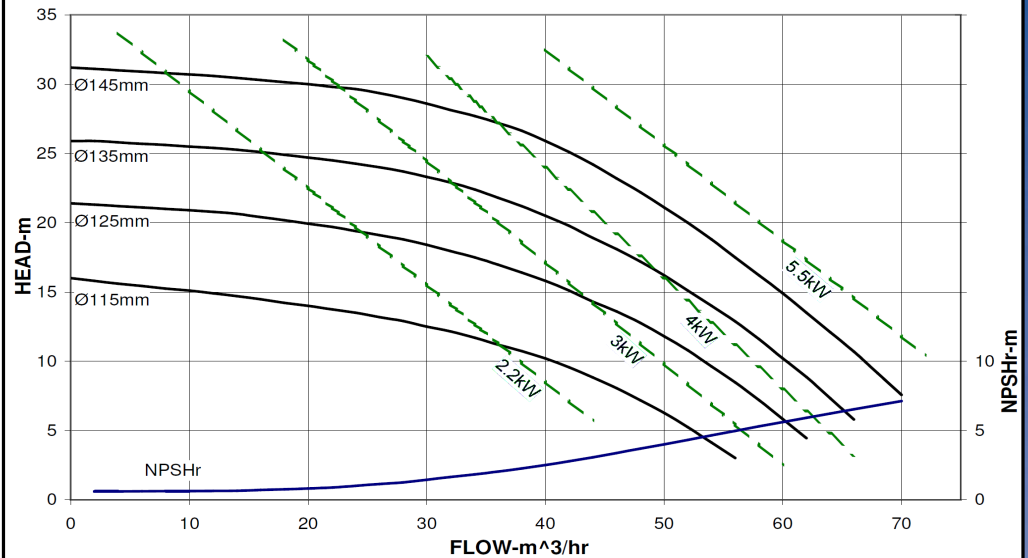

LM-V521 1450 RPM

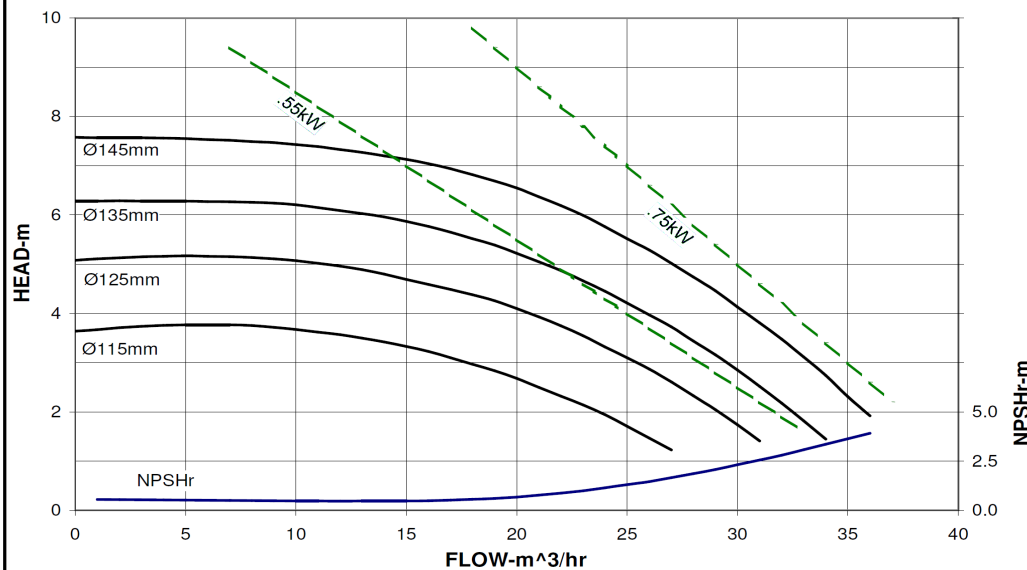

LM pumps are in conformance with 3A sanitary standards for centrifugal and positive rotary pumps for milk and milk products, Number 02-10.

LM-Series pumps have a standard 0.8µm (micrometers) finish, on all product contact surfaces.

**Ampco
Pumps
Company**

2045 West Mill Road
Glendale, Wisconsin 53209
PHONE (414) 643-1852
FAX (414) 643-4452

LM-V521/V522 65X50 01/11