


Ampco Centrifugal Pumps

DATA SHEET



MODEL LM-V531 65 x 50

MODEL LM-V532 65 x 50

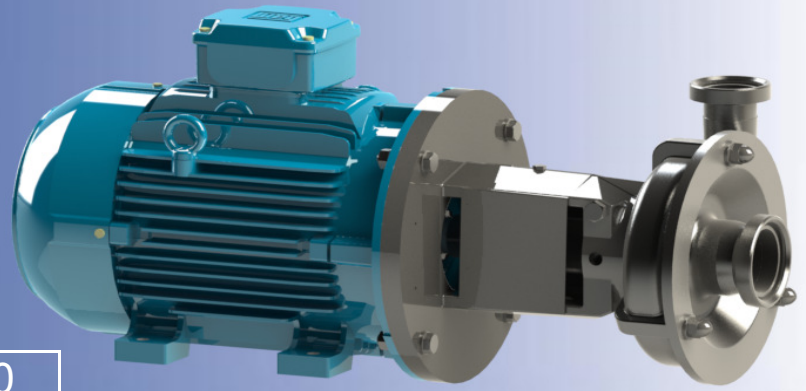

CE

Connections DIN 11851 thread

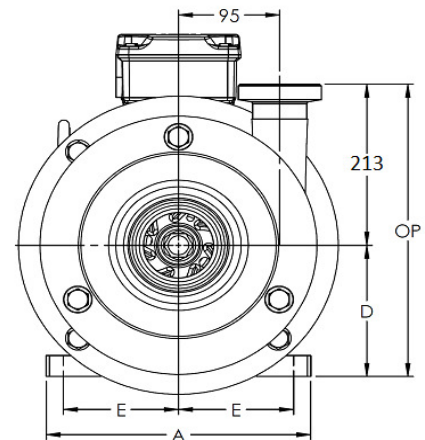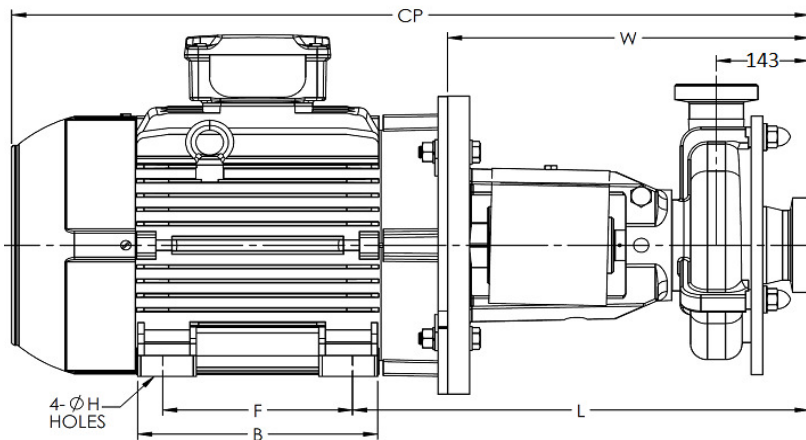

TEFC MOTOR			DIMENSIONS IN MILLIMETERS							(All Values For Reference Only)			MASS
kW	RPM	FRAME	A (typ)	B (typ)	D	E	F	ØH	L	W	CP	OP	Kg
0.75kW	1450	80	149	125.5	80	62..5	100	10	295	245	481	242	32
1.1kW	1450	90S	164	131	90	70	100	10	301	245	523	252	36
1.5kW	1450	90L	164	156	90	70	125	10	301	245	523	252	40
2.2kW	1450	100L	188	173	100	80	140	12	332	269	603	262	66
4kW	1450	112M	220	177	112	95	140	12	339	269	603	274	77
4kW	2900	112M	220	177	112	95	140	12	339	269	603	274	68
5.5kW	2900	132S	248	187	1332	108	140	12	428	339	748	1494	87
7.5kW	2900	132S	248	187	132	108	140	12	428	339	748	294	87
11kW	2900	160M	308	254	160	127	210	14.5	447	339	827	322	157
15kW	2900	160M	308	254	160	127	210	14.5	447	339	827	322	158
18.5kW	2900	160L	308	298	160	127	254	14.5	447	339	827	322	177

MATERIAL SPECIFICATIONS

PART NAME	STAINLESS STEEL
Casing, Cover & Impeller	316L Stainless
Stub Shaft	316L Stainless
Adapter	304 Stainless

PUMP CURVES

MODEL LM-V531 65 x 50


MODEL LM-V532 65 x 50

Ampco Centrifugal Pumps


Curves show approximate characteristics based on clear 20°C water.
Rated point is guaranteed

LM-Series pumps have standard stainless steel adapters and silicon carbide vs. carbon seals.

LM-V531 1450 RPM

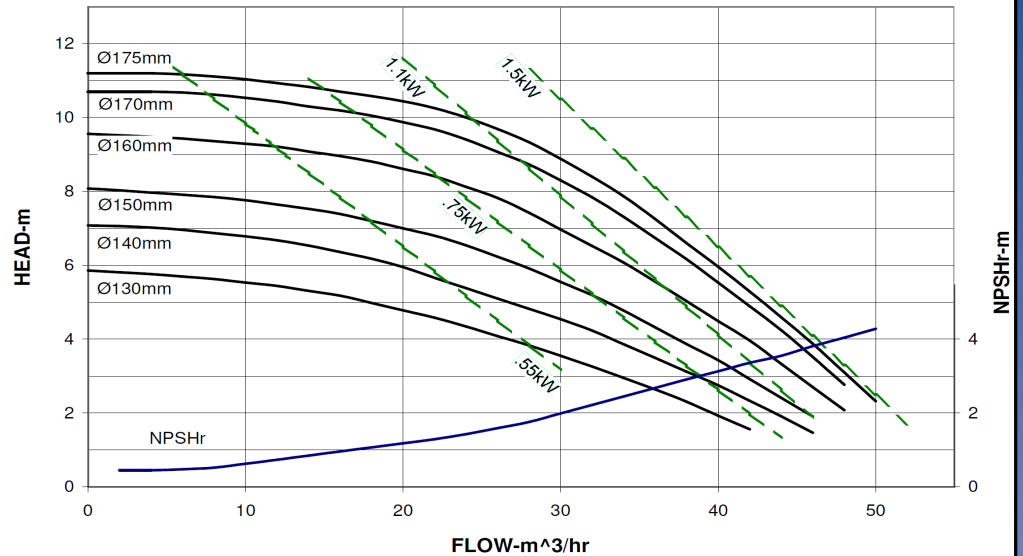

LM-V532 2900 RPM

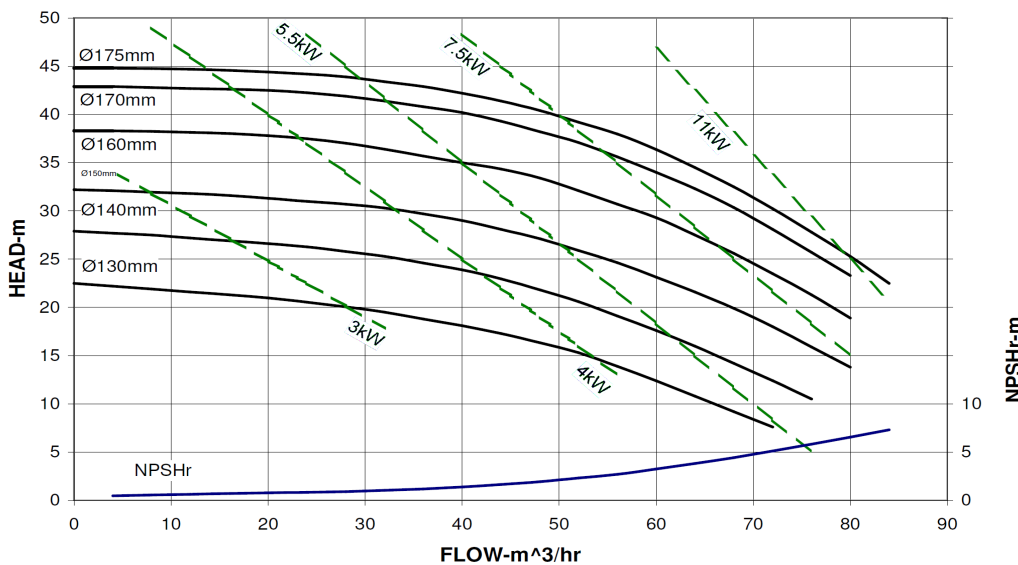

LM pumps are in conformance with 3A sanitary standards for centrifugal and positive rotary pumps for milk and milk products, Number 02-10.

LM-Series pumps have a standard 0.8µm (micrometers) finish, on all product contact surfaces.

**Ampco
Pumps
Company**

2045 West Mill Road
Glendale, Wisconsin 53209
PHONE (414) 643-1852
FAX (414) 643-4452

LM-V531/V532 65X50 01/11