
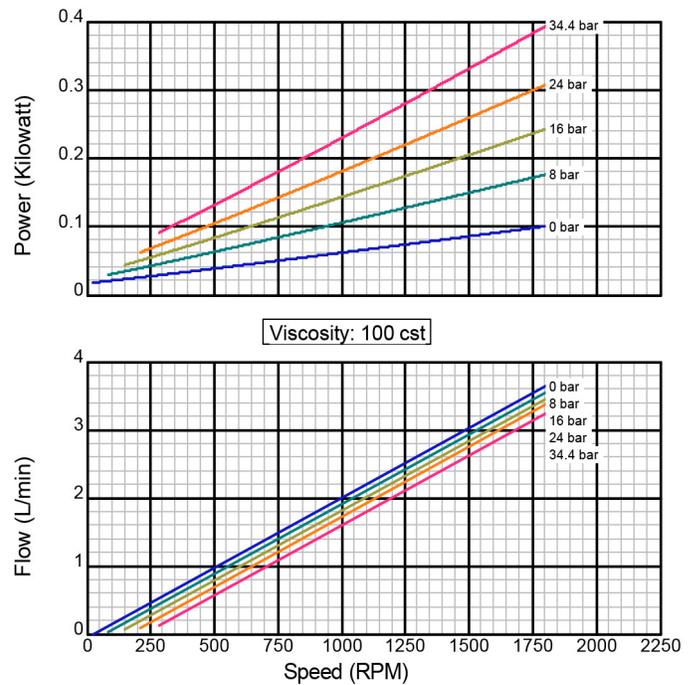
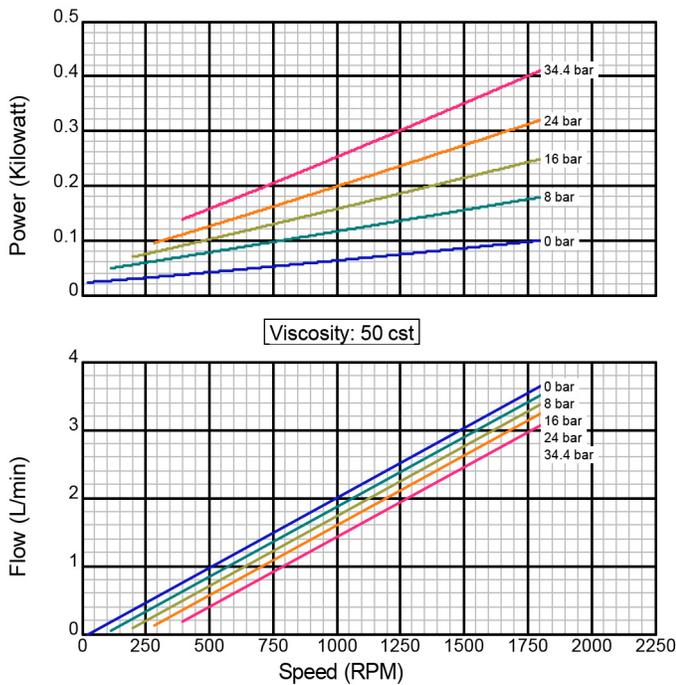
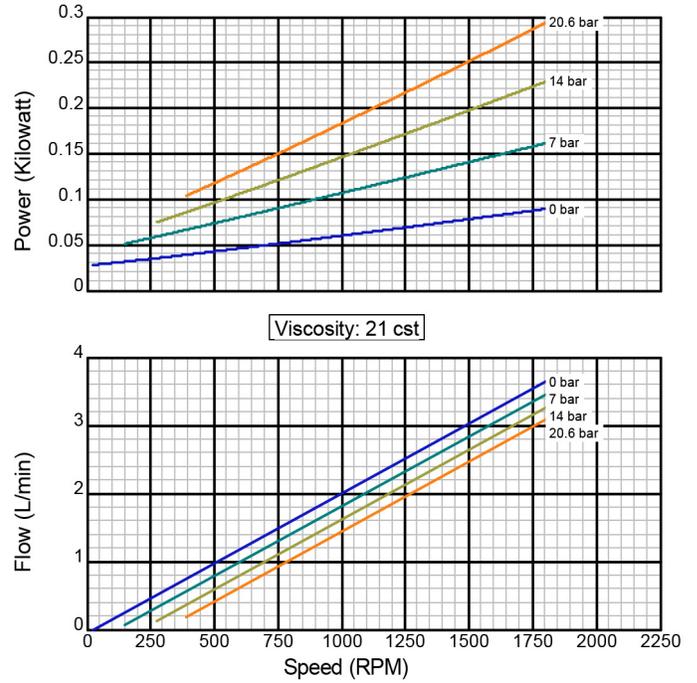


### Model 00L

Iron Construction

Standard Clearance

12.7 mm Std. Port Size

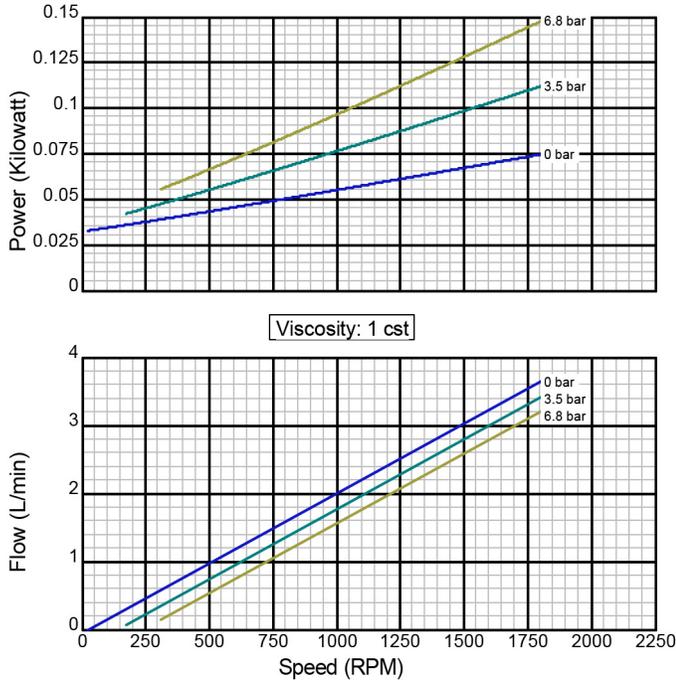

*There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.*




*Created on November 30, 2000*

# Model 00L

Iron Construction

Standard Clearance

12.7 mm Std. Port Size

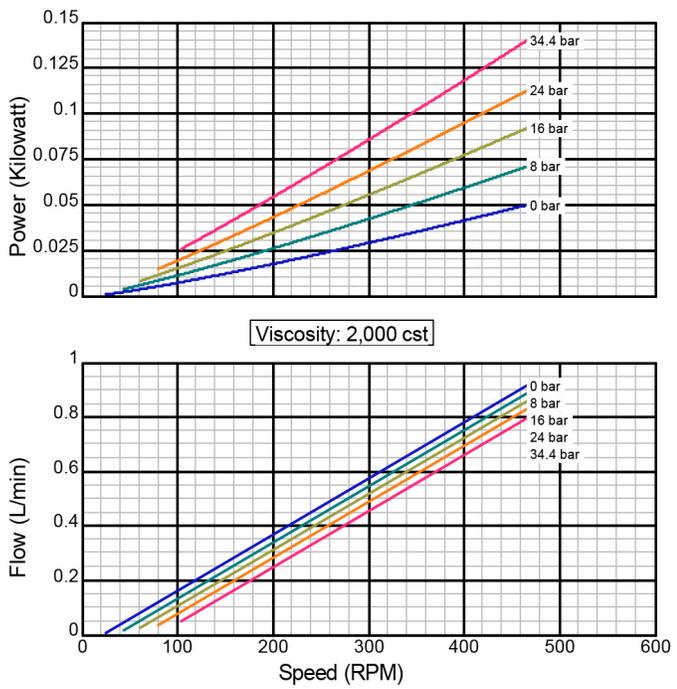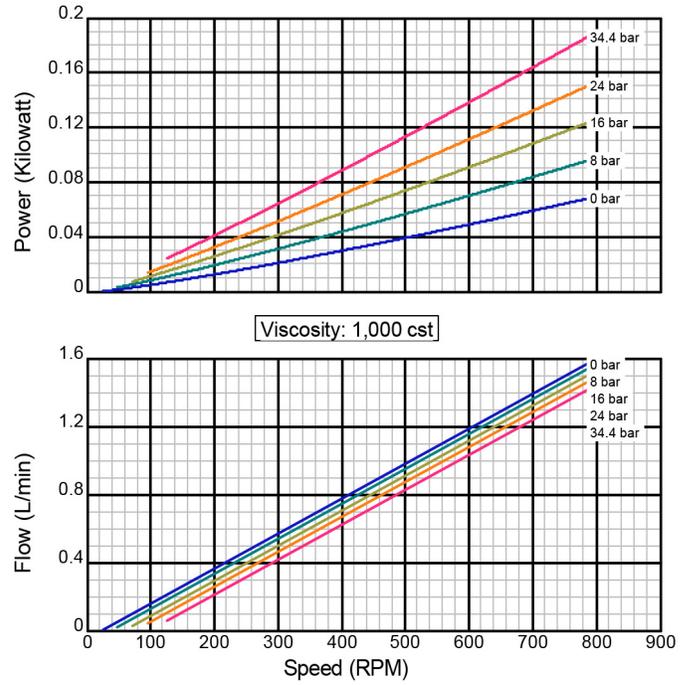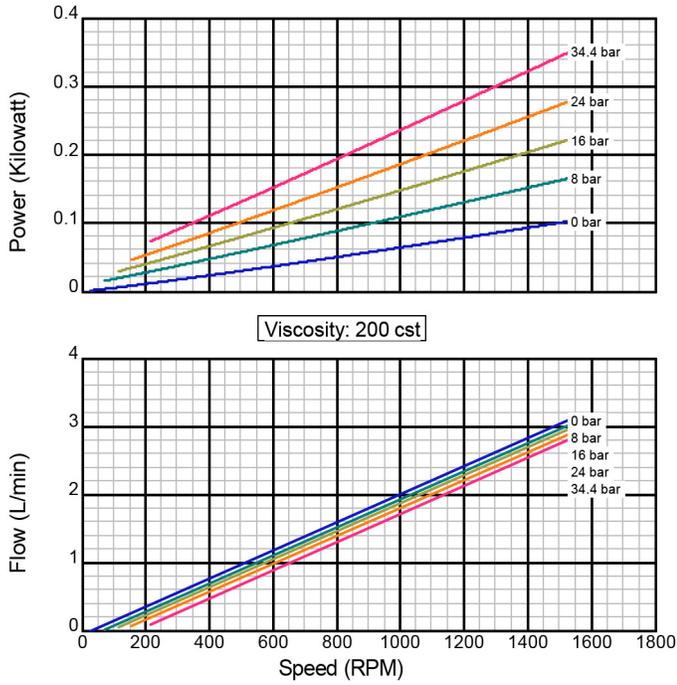

*There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.*


*Created on November 30, 2000*

# Model 0L



Iron Construction

Standard Clearance



12.7 mm Std. Port Size

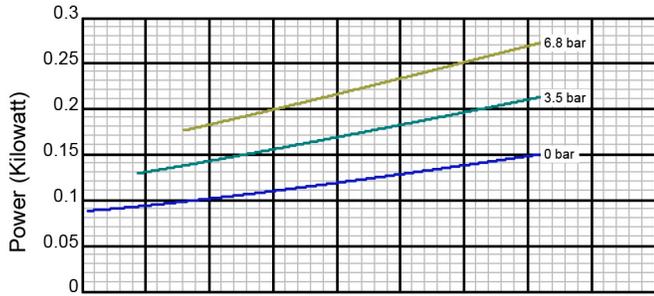



Viscosity: 1 cst

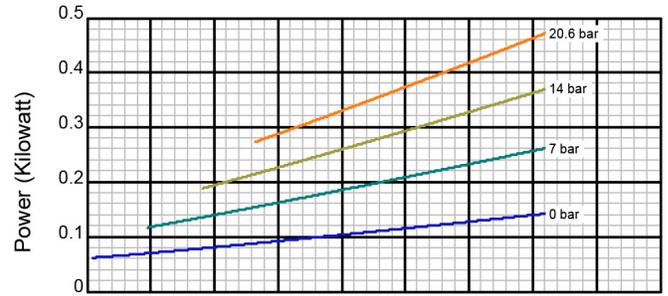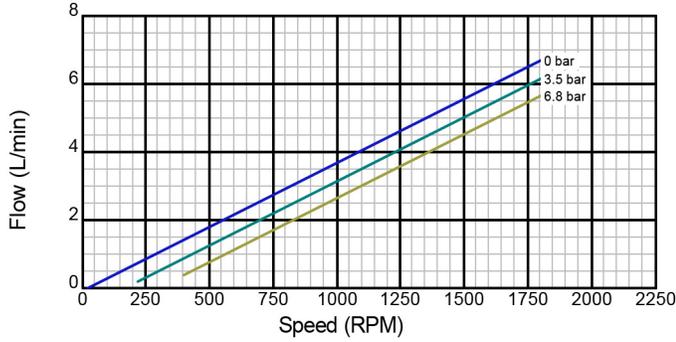


Viscosity: 21 cst

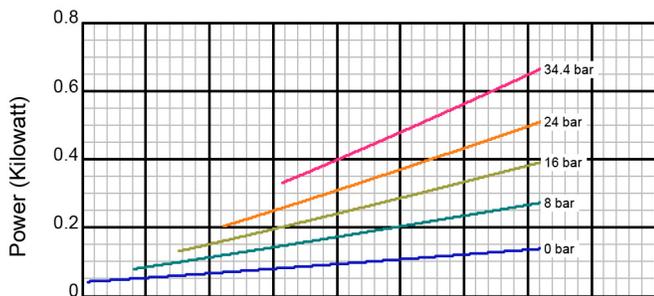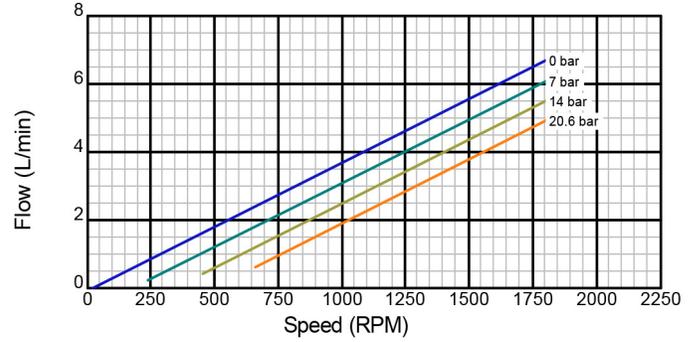

Viscosity: 50 cst

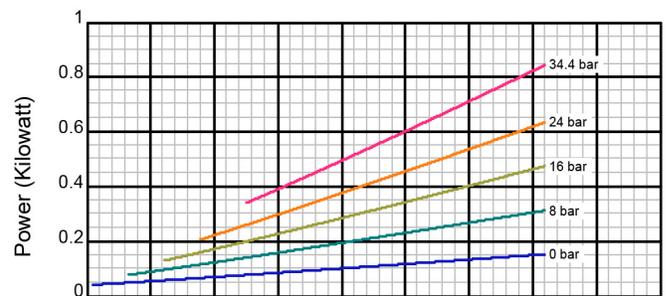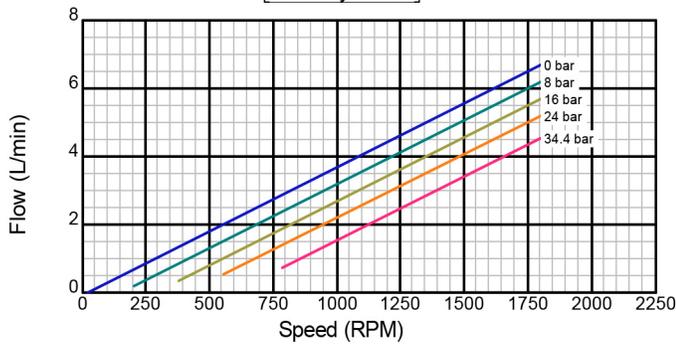

Viscosity: 100 cst

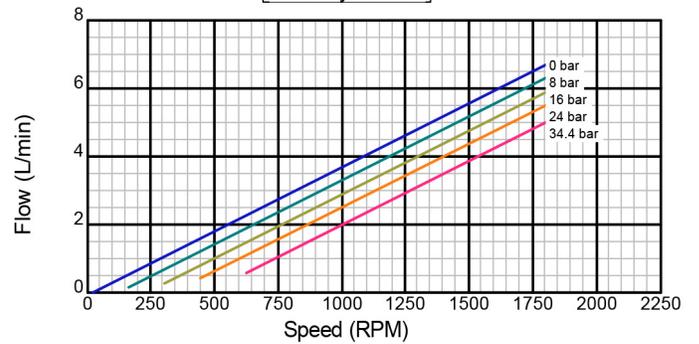

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.




Created on November 30, 2000

# Model 0L

Iron Construction

Standard Clearance

12.7 mm Std. Port Size

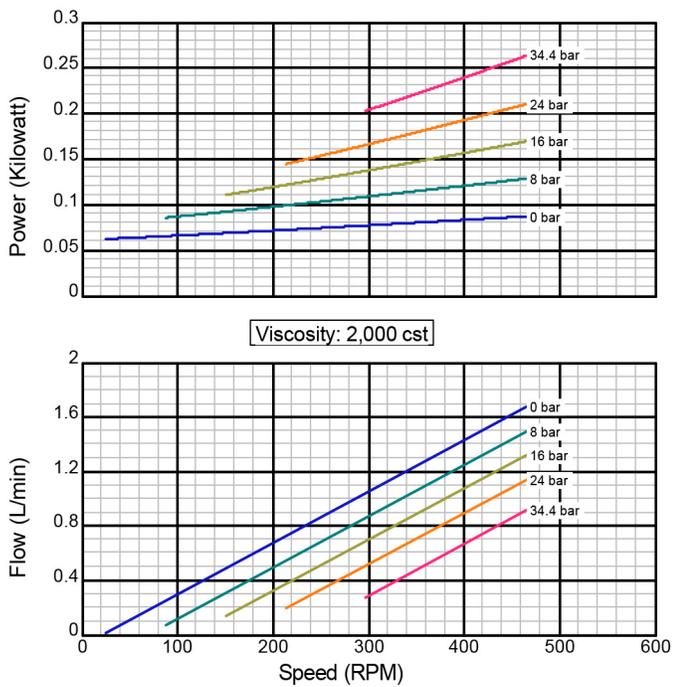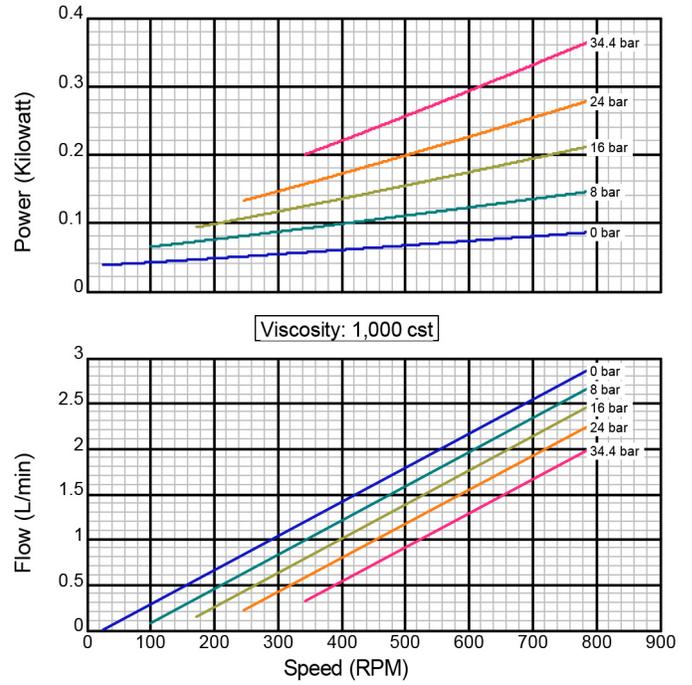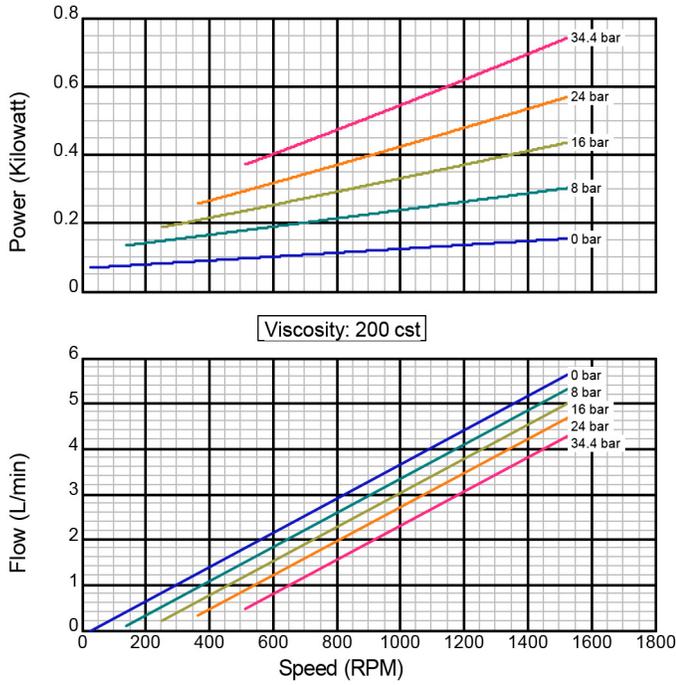

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.


Created on November 30, 2000

# Model 1L



Iron Construction

Standard Clearance



12.7 mm Std. Port Size

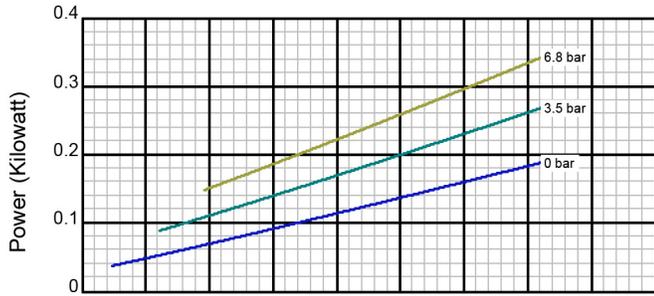



Viscosity: 1 cst

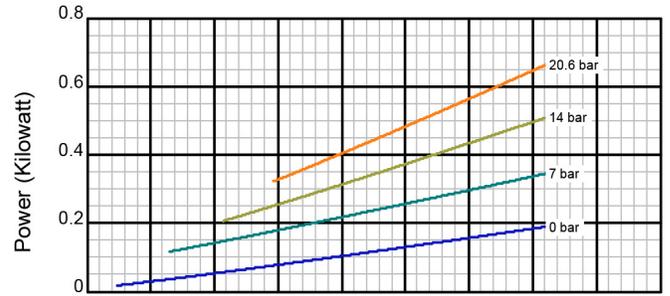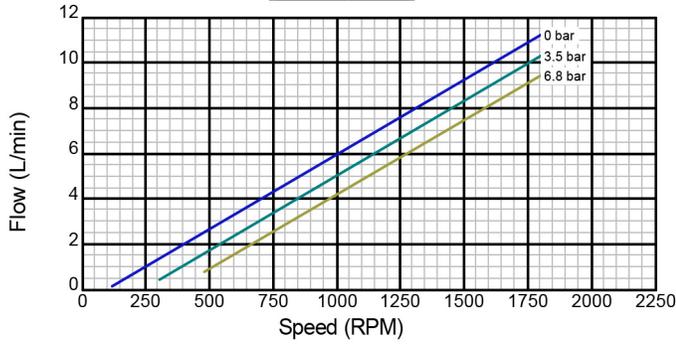


Viscosity: 21 cst

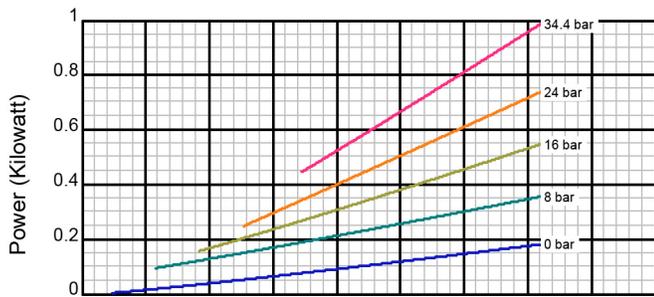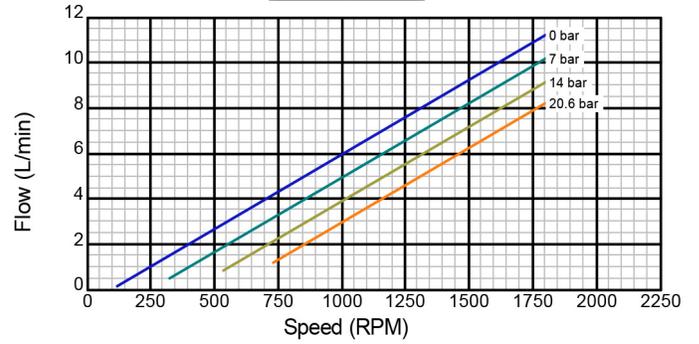

Viscosity: 50 cst

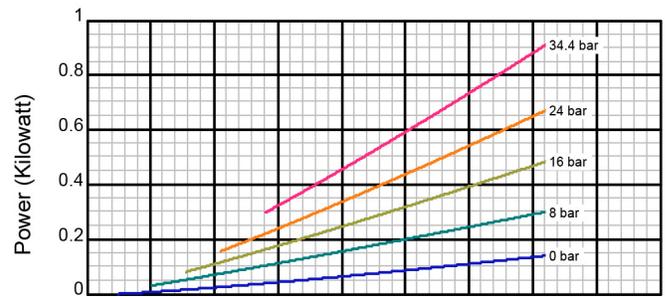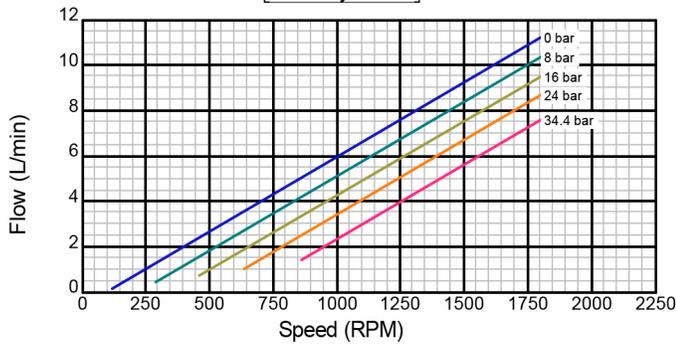

Viscosity: 100 cst

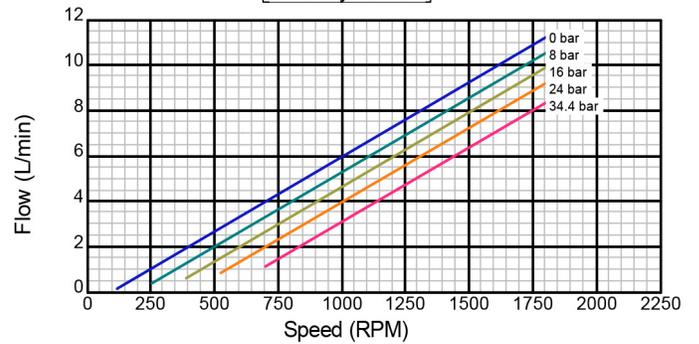

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.




Created on November 30, 2000

# Model 1L

Iron Construction

Standard Clearance

12.7 mm Std. Port Size

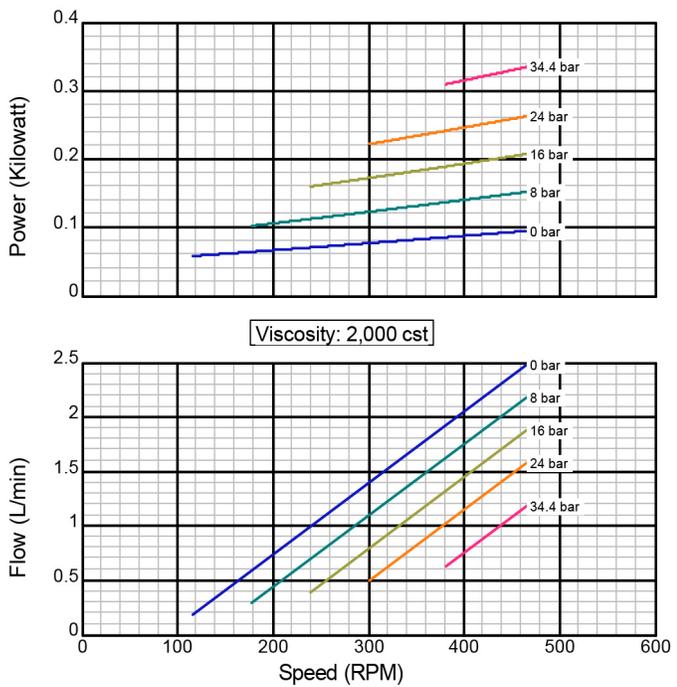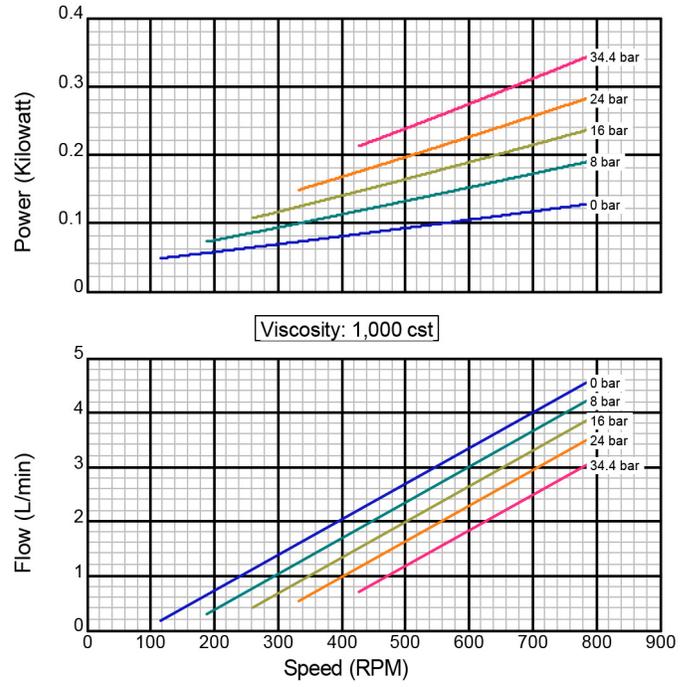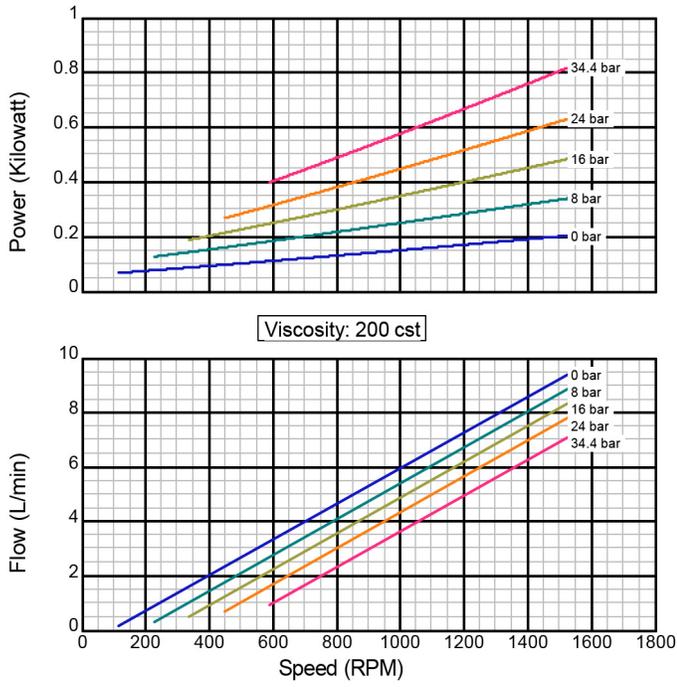

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.





Created on November 30, 2000

# Model 2L

Iron Construction

Standard Clearance

12.7 mm Std. Port Size

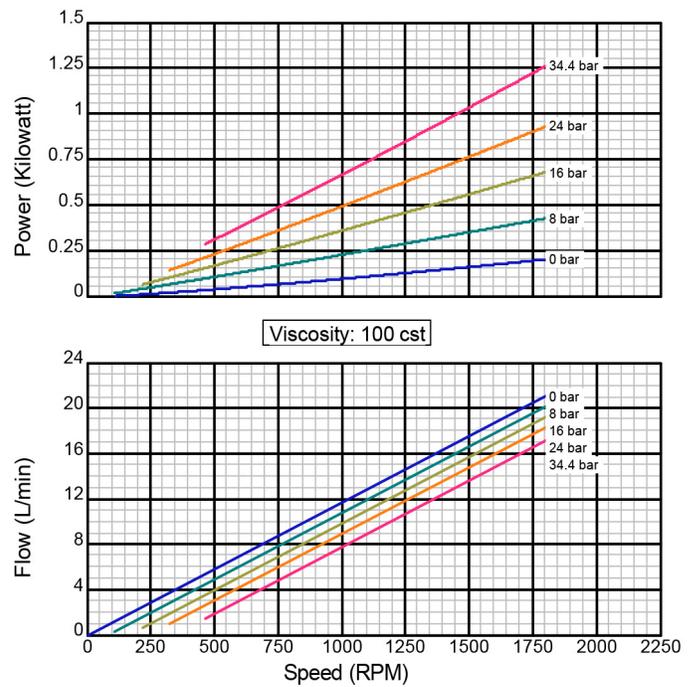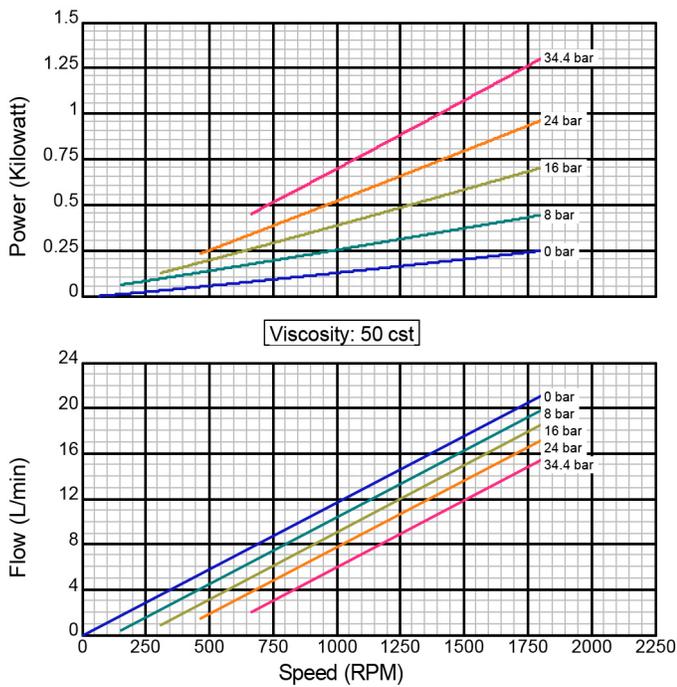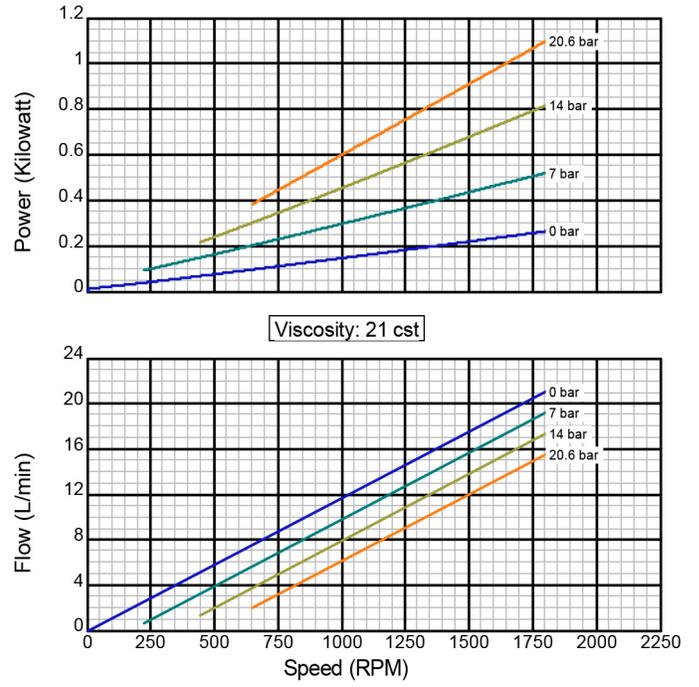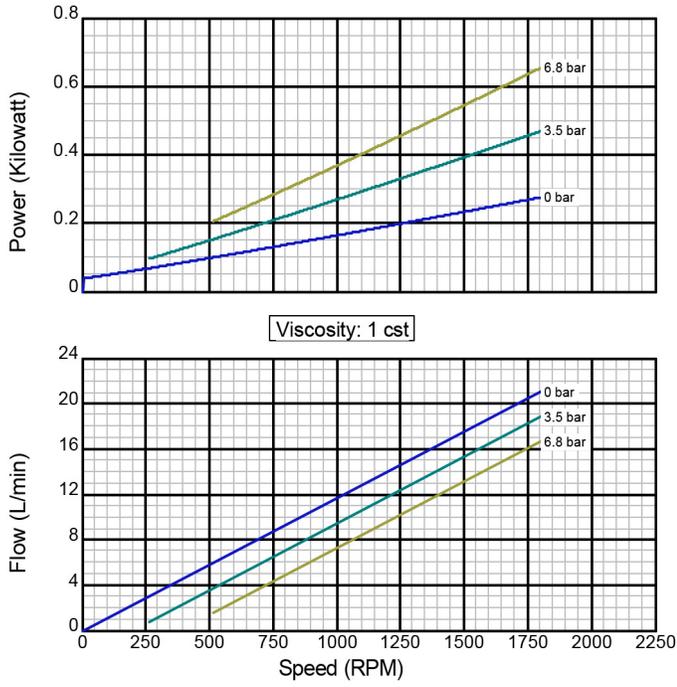

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.




Created on November 30, 2000

# Model 2L

Iron Construction

Standard Clearance

12.7 mm Std. Port Size

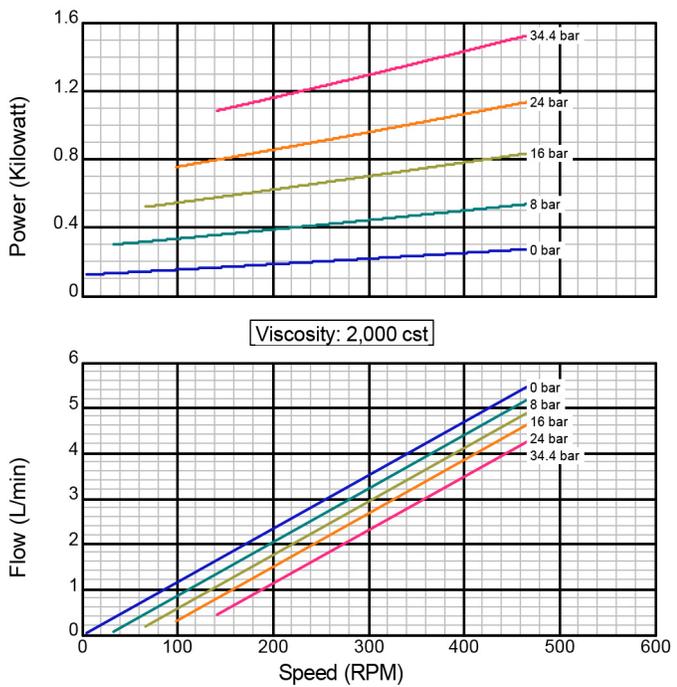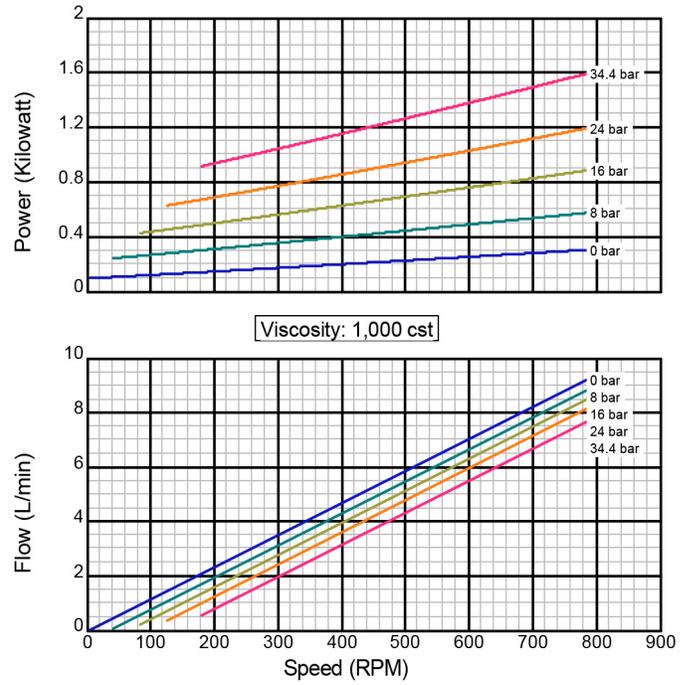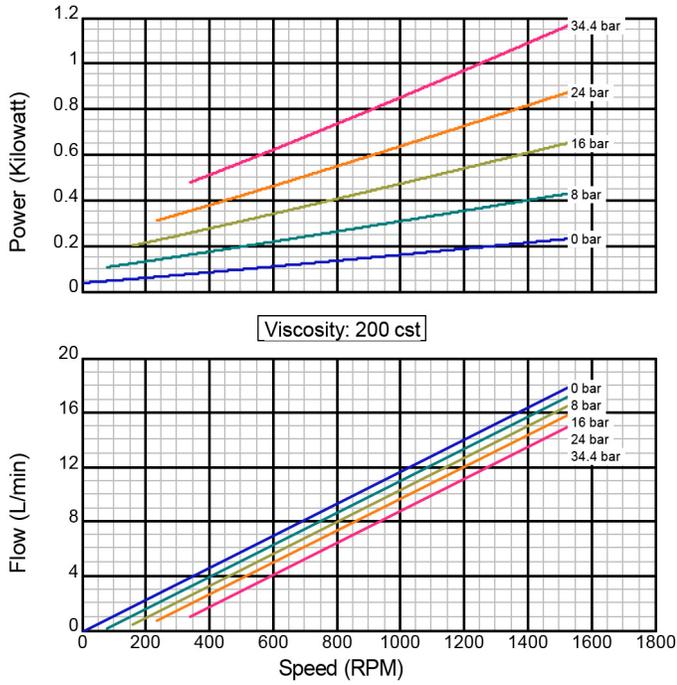

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.





Created on November 30, 2000

# Model 5L

Iron Construction

Standard Clearance

25.4 mm Std. Port Size

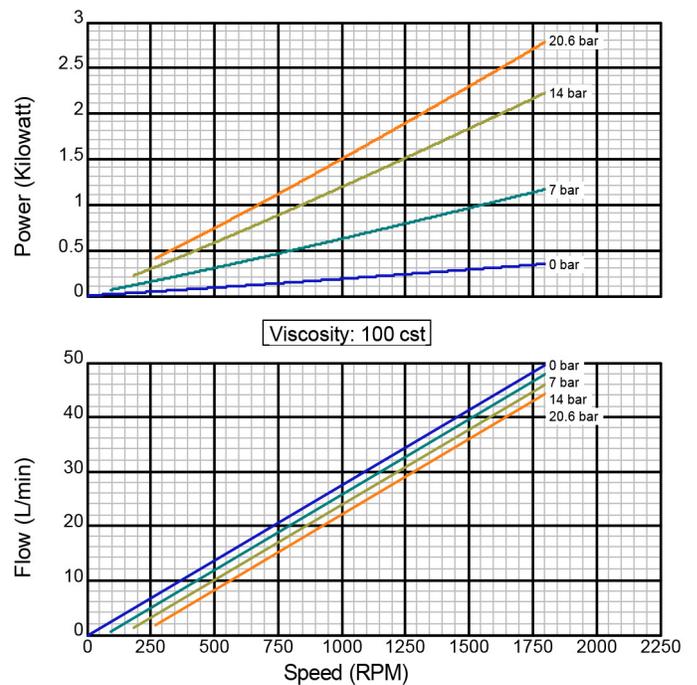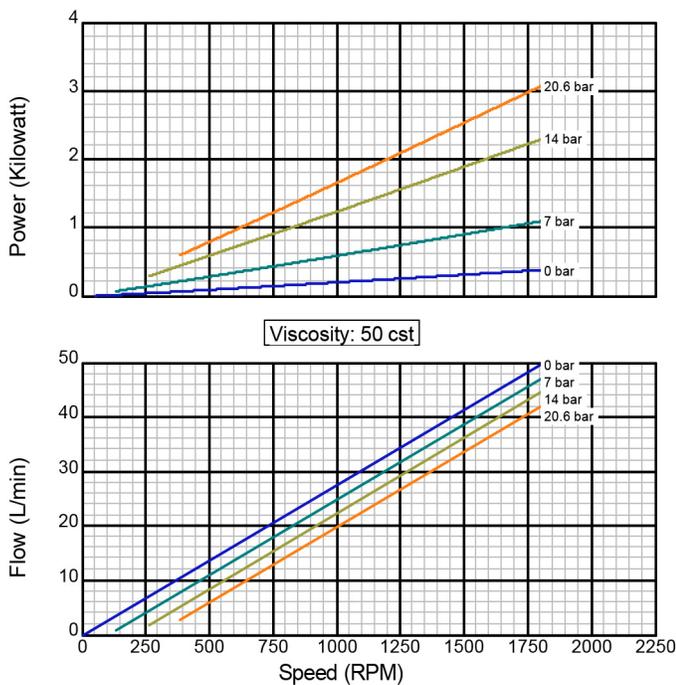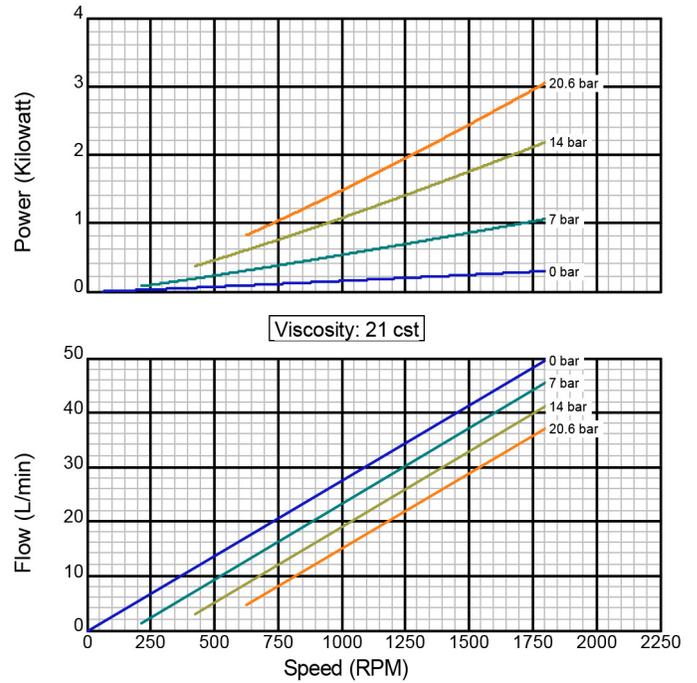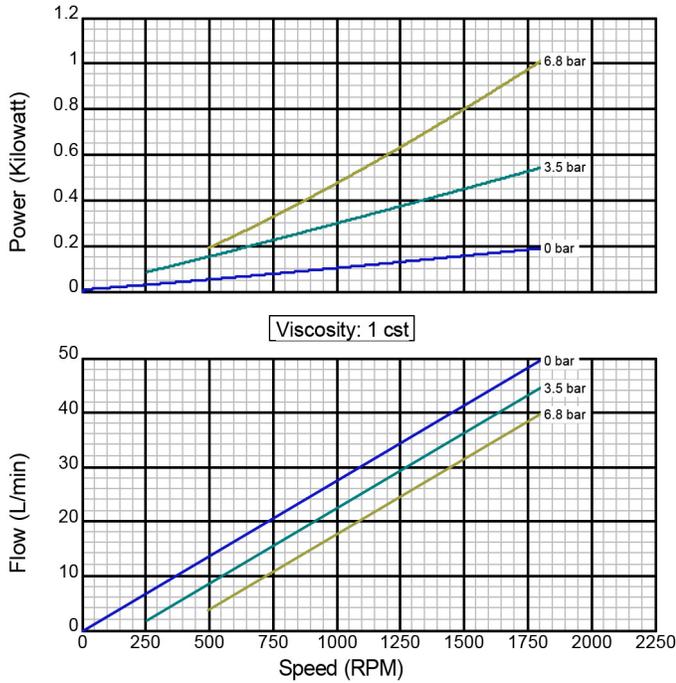

*There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.*


*Created on November 30, 2000*

# Model 5L



Iron Construction

Standard Clearance



25.4 mm Std. Port Size

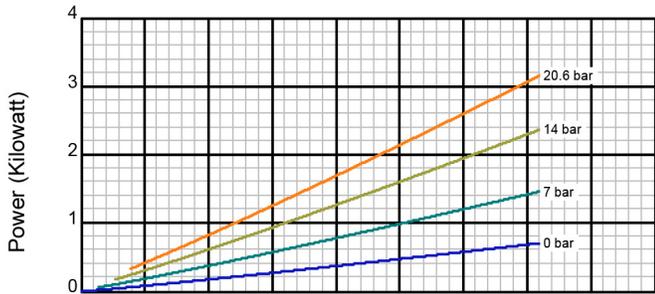



Viscosity: 200 cst

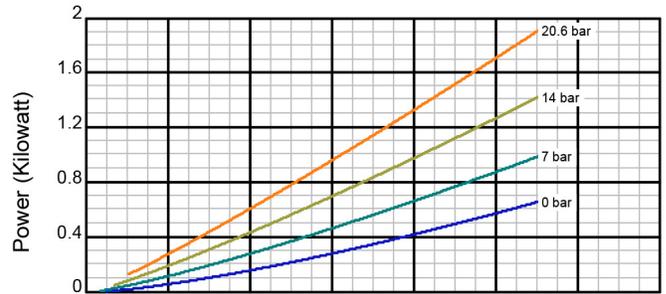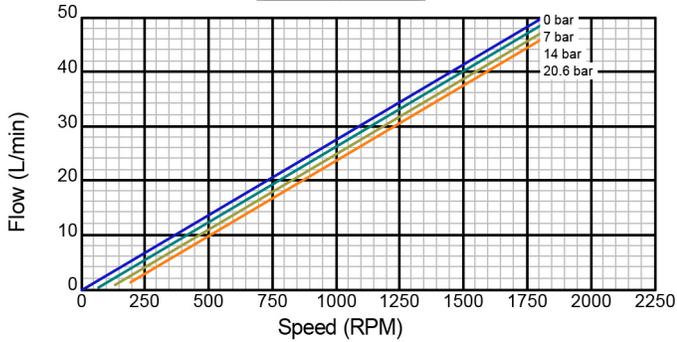


Viscosity: 1,000 cst

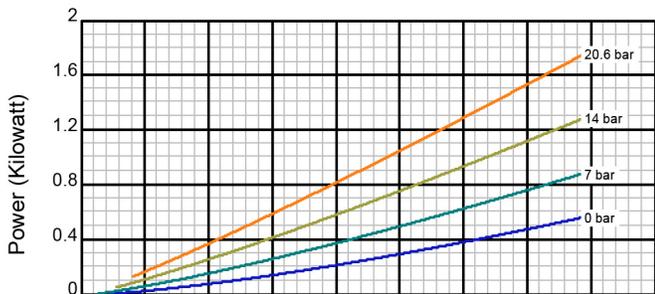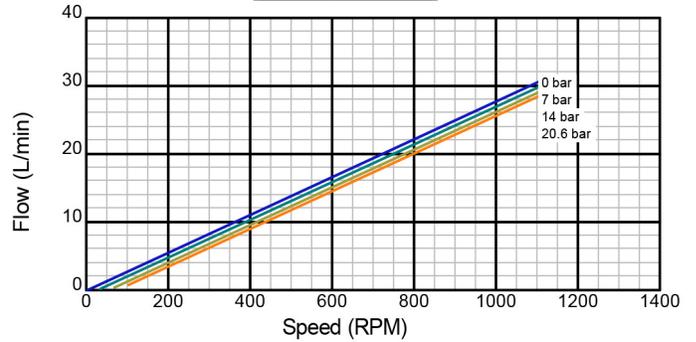

Viscosity: 2,000 cst

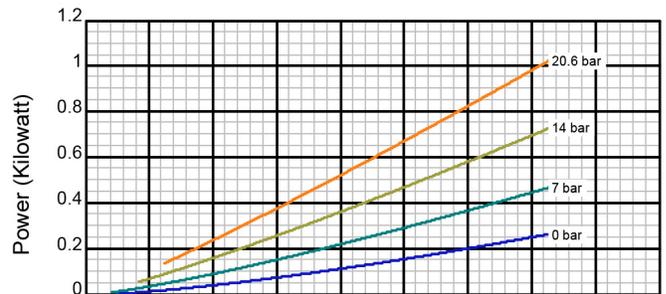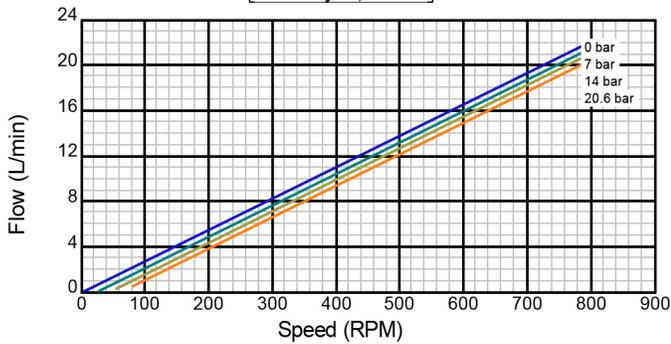

Viscosity: 5,000 cst

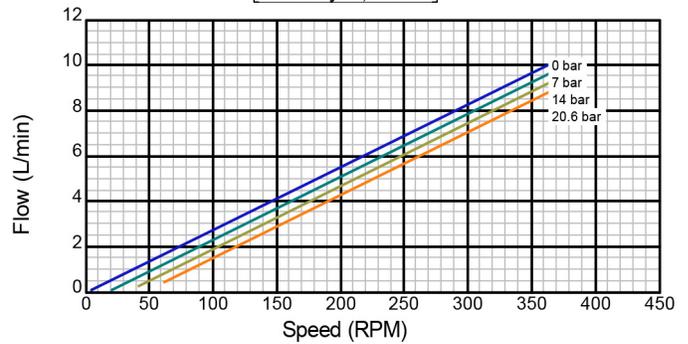

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.

Created on November 30, 2000